



BHFA-Series, Free Flow Strainer

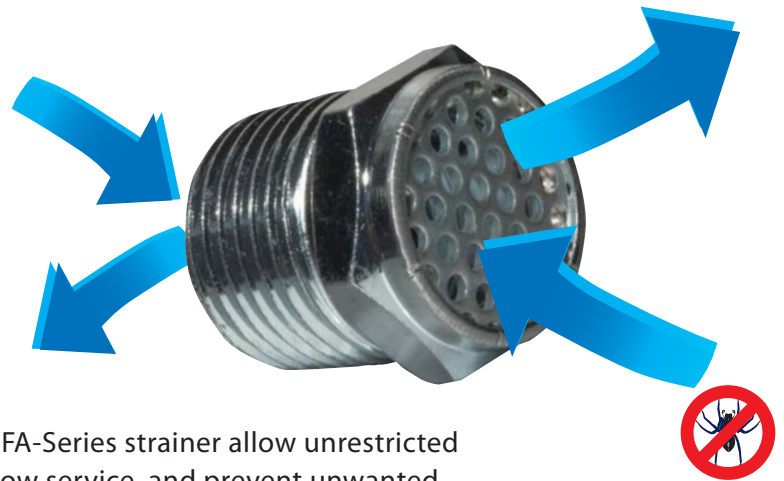

SYMBOL



HOW TO ORDER

BHFA — —

Free **Connection** **Port Option**
Flow 18 = 1/8" None = NPT
Strainer 28 = 1/4" P = BSPT
 38 = 3/8"
 48 = 1/2"

BHFA-Series strainer allow unrestricted air flow service, and prevent unwanted objects from entering the port.

Supplied with standard male pipe thread, unit should be mounted in a protective position, free from excessive vibration. Use wrench on the hex head to tighten unit to the device.

SPECIFICATIONS

ITEM	MODEL	BHFA-18	BHFA-28	BHFA-38	BHFA-48
CONNECTION	NPT	1/8"-27	1/4"-18	3/8"-18	1/2"-14
OVERALL LENGTH	IN. (mm)	0.50" (12.7)	0.70" (17.8)	0.85" (21.7)	0.98" (24.8)
HEX	IN. (mm)	7/16" (11.1)	9/16" (14.2)	11/16" (17.3)	7/8" (22.0)
MATERIAL	BODY	ZINC-PLATED IRON (Zn-Fe)			
	STRAINER	ZINC-PLATED IRON (Zn-Fe)			
MAX OPERATING PRESSURE		300 PSI (21.10 kg/cm ²)			
OPERATING TEMPERATURE		35° ~ 300°F (16° ~ 149°C)			
WEIGHT (APPROX.)	OZ.	0.18	0.37	0.64	1.07
UNIT PACK	EA.	10	10	10	5