



Delivery includes inlet and outlet flanges NPT 1 1/4".

Type	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Capacitor	Weight (approx.)
		\dot{V} max.	Δp_t max.	\dot{V} max.	Δp_t max.	Rated output	Voltage	Current	RPM		
		SCFM	in. H ₂ O	SCFM	in. H ₂ O						
SD 2n VFD 2-L	60 Hz	54	84	54	72	0,88	230/400	3,10/1,80	3430	-	33 lb

Pressure

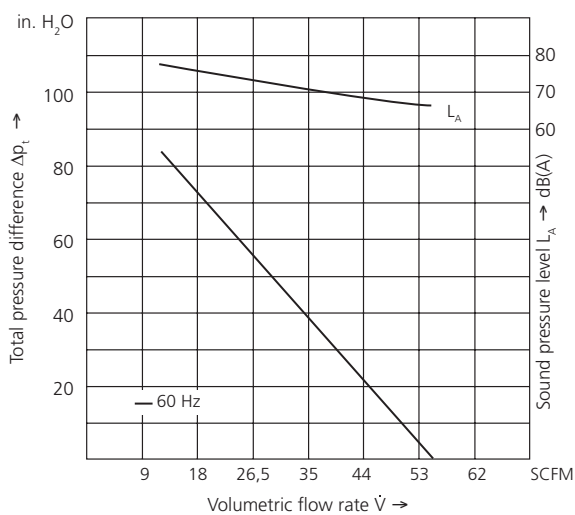

Vacuum

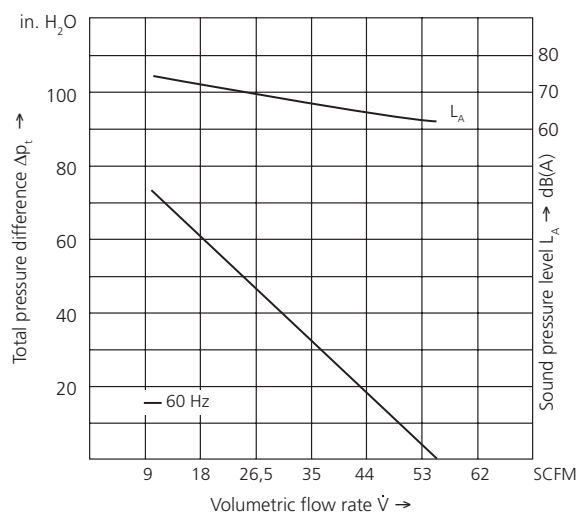

Elektor
airsystems gmbh

Hellmuth-Hirth-Str. 2
73760 Ostfildern
Germany
sales@elektor.com
www.elektor.com

FE
Fuji Electric

Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
sales@fujiblowers.com
www.fujiblowers.com