


Delivery includes inlet and outlet flanges NPT 1½".

Type	Efficiency class	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.) lb
			V max. SCFM	$\Delta p_t$ max. in. H <sub>2</sub> O	V max. SCFM	$\Delta p_t$ max. in. H <sub>2</sub> O	Rated output hp	Voltage V	Current A	RPM min <sup>-1</sup>	
SD 4n VFD 41-L	NEMA Energy Efficient	60	120	72	120	76	1,8	230/400	4,45/2,60	3400	48

## Pressure

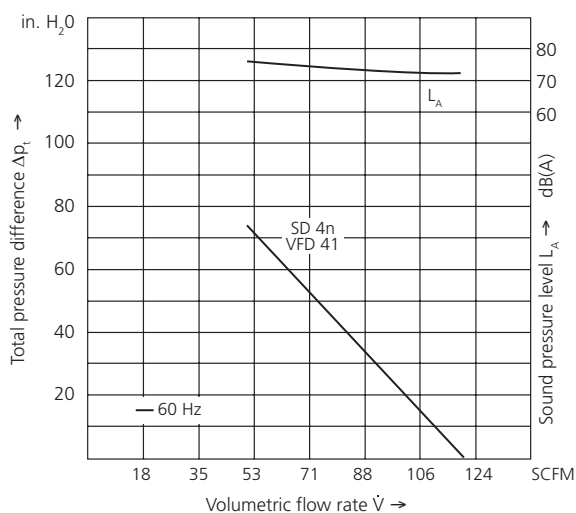

## Vacuum

