

Folio

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Watts/rail
TRH9-60	TRN9-60	50 x 600mm	1 to 5	15 Watts
TRH9-75	TRN9-75	50 x 750 mm	1 to 5	19 Watts
TRH9-90	TRN9-90	50 x 900mm	1 to 5	23 Watts

NOTES

- This is a Low Voltage product
- Transformer required - TRTR220-24V - Max 6 rails (Sold separately)
- Wire specifications: Use flexible multistrand 1mm² - Do not exceed 5 meters in length.
- FOLIO rails can be installed Vertically or Horizontally
- Non Heated version available (Less 10%)

STANDARD FINISHES

Mirror Polished
Stainless Steel

RRP

Brushed
Stainless Steel

+20% (Stocked)

Matt Black/White
Painted

+40% (Stocked)

Gunmetal
PVD

+50% (Stocked)

Brushed Gold
PVD

+60% (Stocked)

SPECIFICATIONS

Voltage

24 Volts

Material

Stainless Steel 304

Finish

Mirror Polished

Ingress Protection

IPX5 (Suitable for wet areas)

Standards

AS/NZ 60335.2.43

Electrical Connection

Concealed Wiring only - any leg
(Transformer required)

Heating Method

Dry Internal Heating Element

Non-Heated version available

DEVELOPED IN
AUSTRALIA




HEATING TIME
30 MINUTES



WARRANTY
10 YEAR



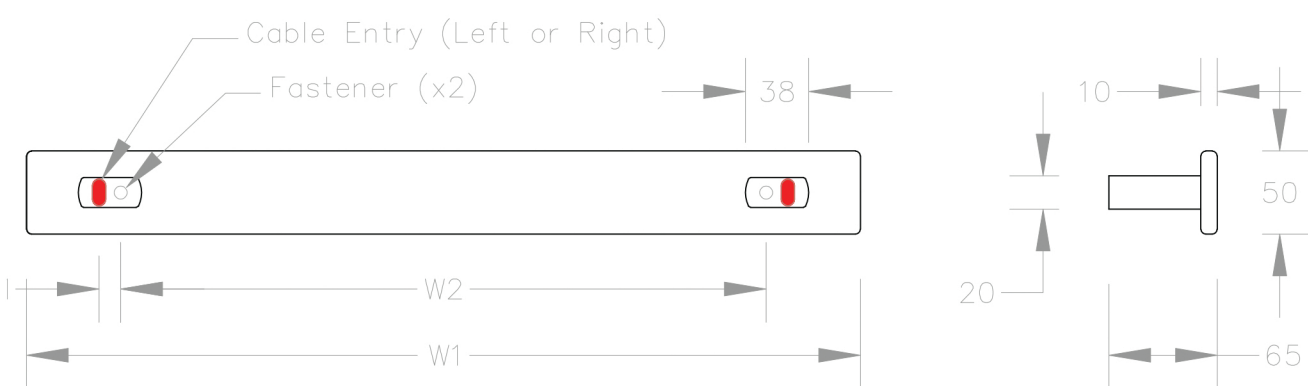

VARIATIONS

Heated Version	Non-Heated Version	H1	W1 (Overall)	W2 (Fixings)
TRH9-60	TRN9-60	50mm	600mm	489mm
TRH9-75	TRN9-75	50mm	750mm	639mm
TRH9-90	TRN9-90	50mm	900mm	789mm