


NATURAL 15 Bar 500mm STR-PTS 230V

POLISHED GRADE 304 Stainless Steel

Controller Features - PTSelect Switch:

- Temperature Adjustment
- ON / OFF Switch
- RED LED Indicator

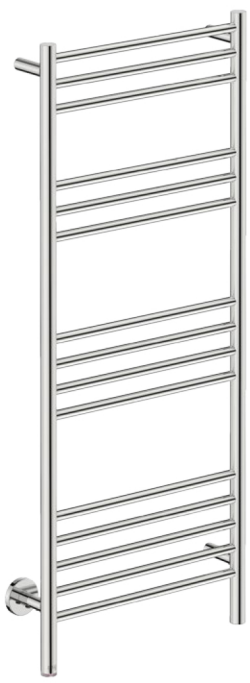

Controller Technical Specifications:

- Controller:** PTSelect Switch
- INPUT Voltage Range:** 190VAC~250VAC
- Operating Frequency:** 50 Hz ±2%
- Load Capability:** 0.18A~4A
- Load Control Range:** 40~100%
- Standby Current:** 3.0mA

HTR Technical Specifications:


- Model:** NAT15221-PTS-POLS
- Size:** 524mm (width) x 1235mm (height)
- Power:** 115 Watts
- Current:** 0.50 Amps
- Volts:** 230 VAC
- IP Rating:** IPX5

Suggested Height of Electrical Outlet = 750mm
(this is only an indication as every installation is different)

NOTES:

- *EO Denotes DUAL ENTRY Electrical Outlet connection
- *PTS Denotes location of PTSelect Switch

Dimensions given are in mm. Bathroom Butler® reserves the right to alter and/or remove designs from time to time without prior notice. This drawing is to be used for reference purposes only. E & O.E. This product may not be available in your specific country, please check local website for availability. Copyright Bathroom Butler® 2016

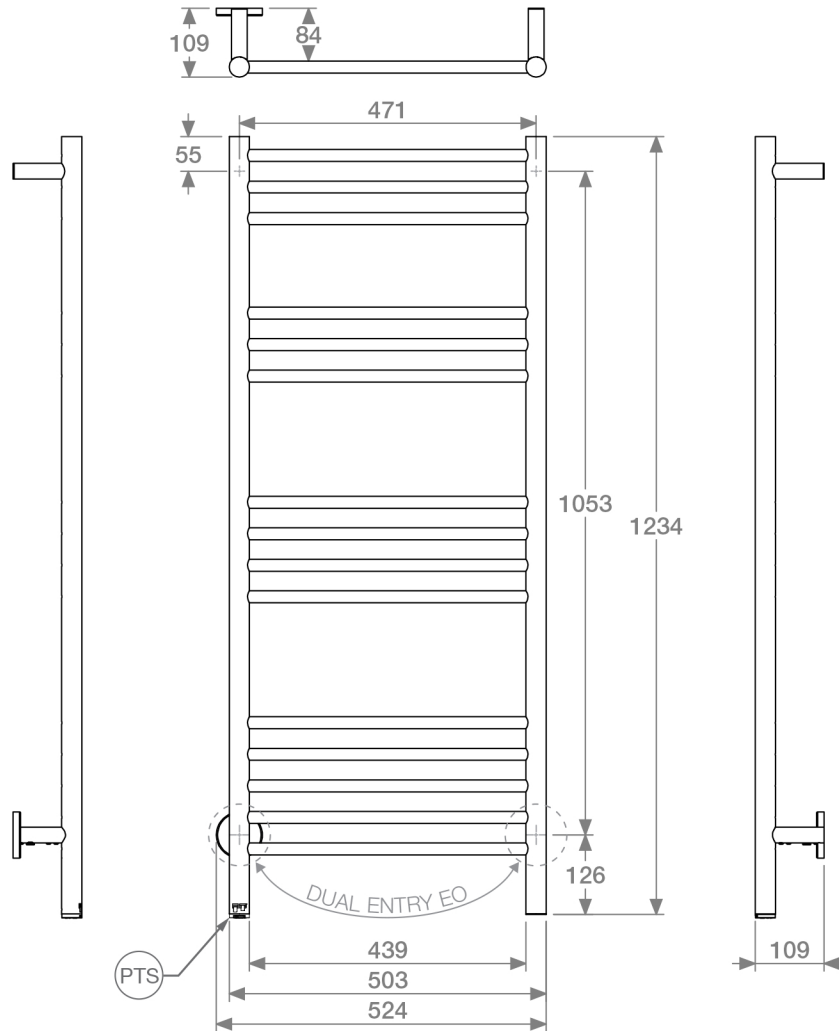

| | | | | | |
|--------------------------------------|--|--|-------------------------|---------------------------------------|-------------------------------------|
| DET DRY ELEMENT TECHNOLOGY | RRRR RAPID HEATING 10-15min | TEMP PERSONAL TEMPERATURE SELECT | DE DUAL ENTRY | S GRADE 304 STAINLESS STEEL | 10 YEAR LIMITED GUARANTEE |
|--------------------------------------|--|--|-------------------------|---------------------------------------|-------------------------------------|

South Africa: 0860 104 653 • info@bathroombutler.co.za • www.bathroombutler.co.za
 Australia: 1300 133 320 • sales@bathe.net.au • www.bathe.net.au
 Mauritius: 230 242 1248 • sales@lisingroup.com • www.bathroombutler.com

Document version **3.2**
 Product version **3.0**