

Solo

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Watts/rail
TRH1-45	TRN1-45	29 x 450mm	1 to 5	10 Watts
TRH1-65	TRN1-65	29 x 650 mm	1 to 5	14 Watts
TRH1-85	TRN1-85	29 x 850 mm	1 to 5	18 Watts

NOTES

- This is a Low Voltage product
- In-Wall Kit required - TRCF105 - Max 5 rails (Sold separately)
- In-Wall Kit can be cut to length or into 2 pieces for split locations
- In-Wall Kit is installed behind wall lining or requires a 900mm high x 30mm wide x 25mm deep slot in wall render
- Supplied spigots can accommodate up to 30mm (Wall lining + adhesive and tiles)
- Longer spigots are available for thick stone / tiles - 50mm (YZF63 - Sold separately)
- Wire specifications: Use flexible multistrand 1mm² - Do not exceed 5 meters in length.
- Non Heated version available (Less 10%)

STANDARD FINISHES

Mirror Polished
Stainless Steel

RRP

Brushed
Stainless Steel

+20% (Stocked)

Matt Black/White
Painted

+40% (Stocked)

Gunmetal
PVD

+50% (Stocked)

Brushed Gold
PVD

+60% (Stocked)

SPECIFICATIONS

Voltage

12 Volts

Material

Stainless Steel 304

Finish

Mirror Polished

Ingress Protection

IPX5 (Suitable for wet areas)

Standards

AS/NZ 60335.2.43

Electrical Connection

Concealed Wiring only - any leg (TRCF105 required)

Heating Method

Dry Internal Heating Element

Non-Heated version available

DEVELOPED IN
AUSTRALIA




HEATING TIME
30 MINUTES



WARRANTY
10 YEAR



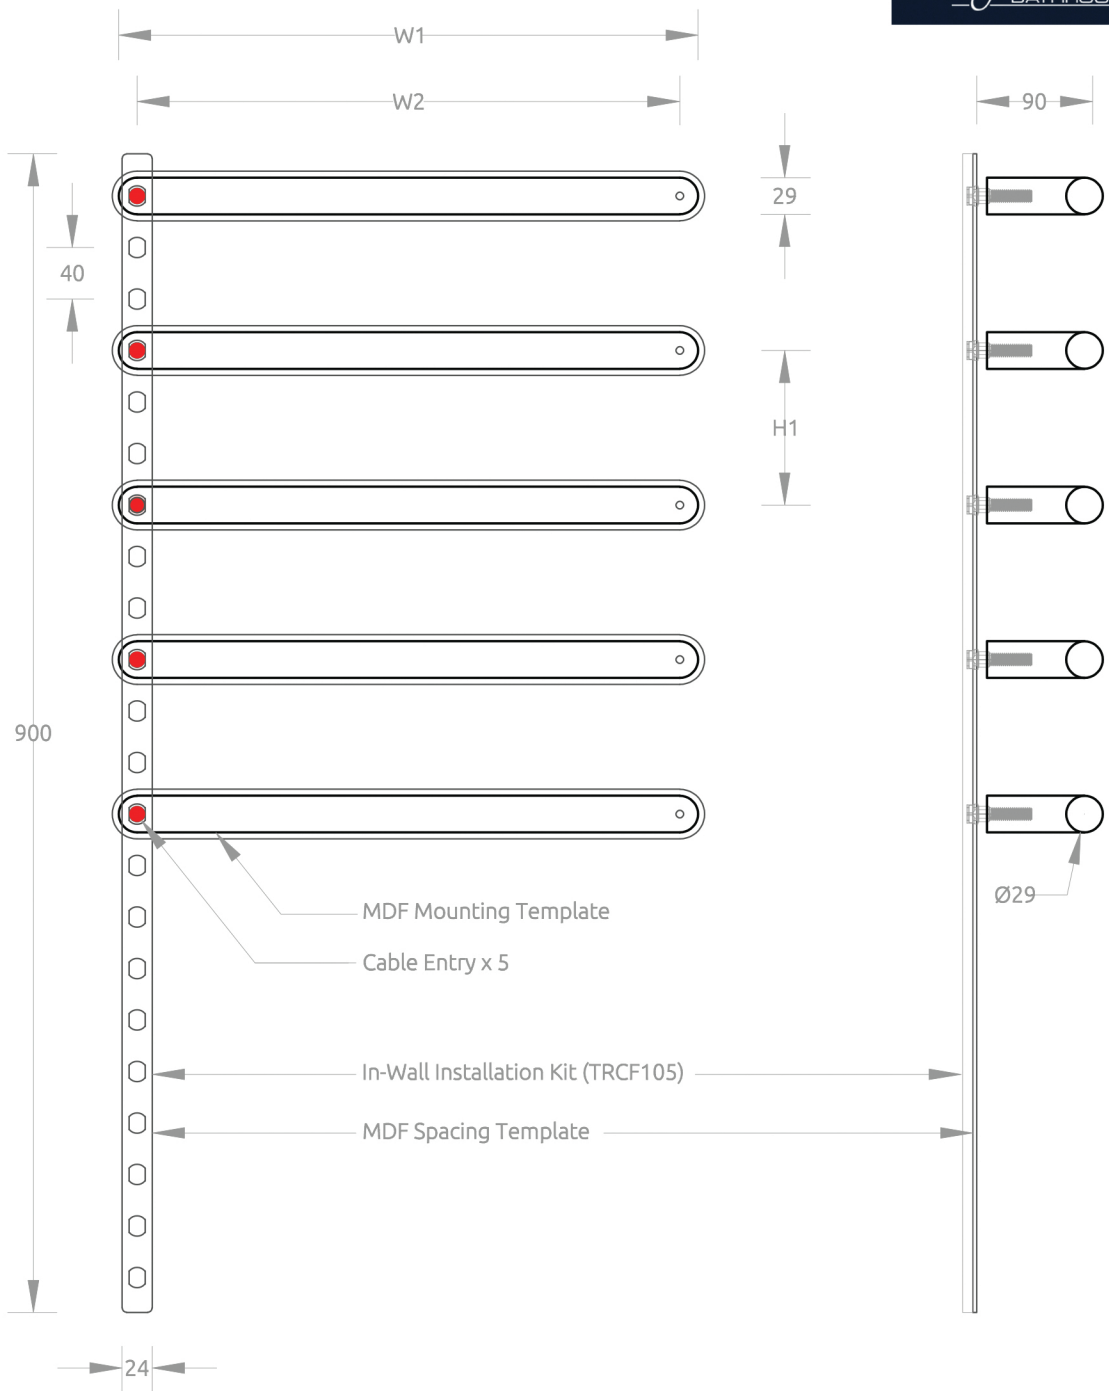

VARIATIONS

Heated Version	Non-Heated Version	H1 (Spacing)	W1 (Overall)	W2 (Fixings)
TRH1-45	TRN1-45	40mm x Spaces	450mm	421mm
TRH1-65	TRN1-65	40mm x Spaces	650mm	621mm
TRH1-85	TRN1-85	40mm x Spaces	850mm	821mm