



Warranty
10
YEAR

Compliant
IEC
62471

Compliant
CE
RoHS

Rated
IP
50

Connector
5-PIN
M12

PRODUCT HIGHLIGHTS

- ✓ 5-pin M12 quick connect
- ✓ Built-in driver, no external wiring to driver needed
- ✓ PNP and NPN trigger input signal



PRODUCT DESCRIPTION

The LC300 features 12 high-bright LEDs, operates in continuous mode, and includes a built-in driver. The LC300 is a low cost linear light. NPN or PNP trigger signals can be used to control the on/off input of the light.




PRODUCT SPECIFICATIONS

Electrical Input	24VDC +/- 5%
Input Current	Max. 700 mA
Wattage	Max. 17 W
On/Off Input	PNP : +4VDC or greater to activate NPN : GND (<1VDC) to activate
PNP Line	4 mA @ 4VDC 10 mA @ 12VDC 20 mA @ 24VDC
NPN Line	15 mA @ Ground (0VDC)
Yellow Indicator LED	LED Strobe Indicator ON = Light Active
Green Indicator LED	ON = Power
Continuous Mode	NPN can be tied to ground OR PNP can be tied to 24VDC (not both)
Ambient Temperature	-18°-40° C (0°-104° F)
IP Rating	IP50
Weight	~370g
Compliances	CE, RoHS, IEC 62471
Warranty	10 year warranty. For complete warranty information, visit smartvisionlights.com/warranty .



WIRING CONFIGURATION



Pin layout for light (Male Connector)

Pins	Function	Signal	Wire Color
1	Power In	+24VDC	BROWN
2	NPN	Sinking Signal	WHITE
3	GND	Ground	BLUE
4	PNP	Sourcing Signal	BLACK
5	NOT USED	NOT USED	NOT USED

* Some cables use green/yellow for pin 5

For continuous mode: Tie PNP (pin 4) to +24VDC (pin 1) or tie NPN (pin 2) to ground (pin 3).



MAXIMUM INTENSITY

Light is set to maximum intensity.
It is not adjustable.



PRODUCT DRAWING

CAD files available on our website.
Dimensions are in mm.

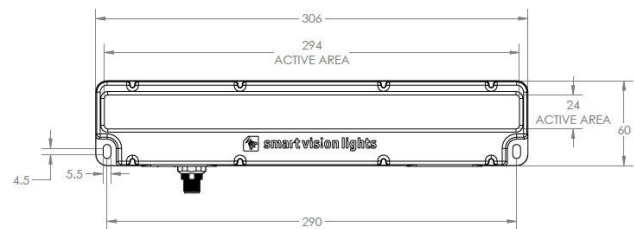

RESOURCE CORNER


Additional resources, including CAD files, videos, and application examples, are available on our website.




LIGHT PATTERNS

Smart Vision Lights recommends the LC300 be used at a working distance between 300 mm and 4000 mm.


Beam Diameter (White Light)—5700K

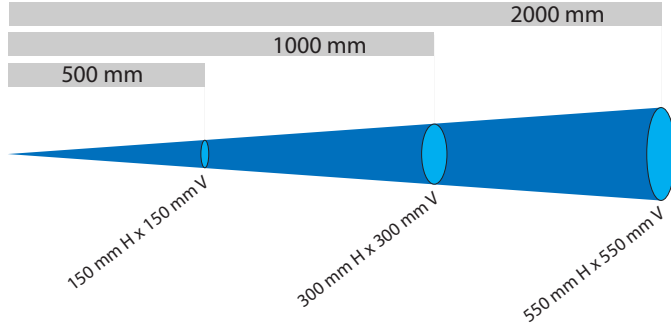

Beam Diameter (White Light)—5700K

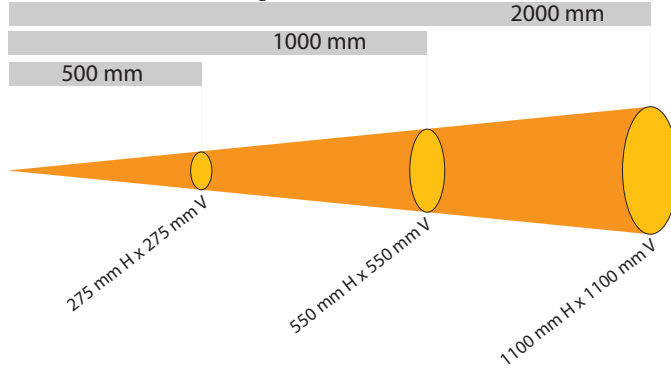

Beam Diameter (White Light)—5700K

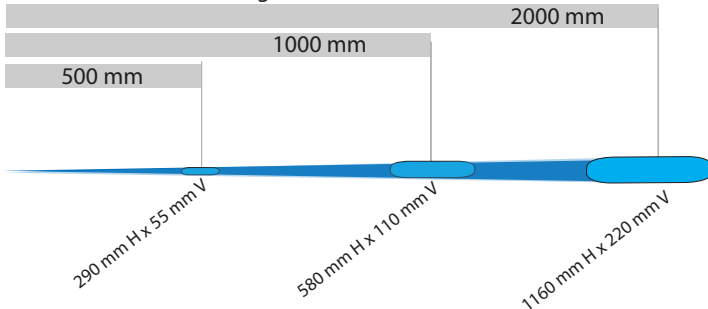

LIGHTING PATTERN FOR THE LC300 with Narrow (Standard) Lenses

Working Distance mm (inches)	Pattern (80%–100% measured intensity) mm (inches)
500 mm (19.7")	150 mm (~5.9") H x 150 mm (~5.9") V
1000 mm (39.4")	300 mm (~11.8") H x 300 mm (~11.8") V
2000 mm (78.8")	550 mm (~21.6") H x 550 mm (~21.6") V

Typical Output Performance	Illuminance (Lux)
Distance = 500 mm	11,000
<i>Illuminance measurement taken on White Lights—5700 K</i>	

LIGHTING PATTERN FOR THE LC300 with Wide (W) Lenses

Working Distance mm (inches)	Pattern (80%–100% measured intensity) mm (inches)
500 mm (19.7")	275 mm (~10.8") H x 275 mm (~10.8") V
1000 mm (39.4")	550 mm (~21.6") H x 550 mm (~21.6") V
2000 mm (78.8")	1100 mm (~43") H x 1100 mm (~43") V

Typical Output Performance	Illuminance (Lux)
Distance = 500 mm	8000
<i>Illuminance measurement taken on White Lights—5700K</i>	


LIGHTING PATTERN FOR THE LC300 with Line (L) Lenses

Working Distance mm (inches)	Pattern (80%–100% measured intensity) mm (inches)
500 mm (19.7")	290 mm (~12.2") H x 55 mm (~2.1") V
1000 mm (39.4")	580 mm (~24.4") H x 110 mm (~4.3") V
2000 mm (78.8")	1160 mm (~48.8") H x 220 mm (~8.6") V


Typical Output Performance	Illuminance (Lux)
Distance = 500 mm	19,000
<i>Illuminance measurement taken on White Lights—5700K</i>	

The LC300 Linear Light produces a uniform light pattern.


Working Distance = 500 mm Grid set to 25 mm x 25 mm

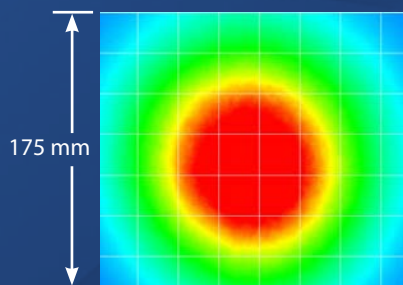

Narrow



Wide




Line



PART NUMBER

LC300



LENS:

Leave blank for Standard (Narrow)

W = Wide

L = Line

Part Number Examples:

LC300-625 (LC300, 625 Red Wavelength, Standard [Narrow Lens])

LC300-WHI-L (LC300, White, Line Lens)



LENS OPTICS


NARROW (Standard)

Narrow, 16° angle-cone lenses are standard. Standard lenses create a narrow beam of illumination and are used for long working distances.




WIDE

Wide, 30° angle-cone lenses create a large area of illumination. They create a floodlight effect and can be used for short working distances.




LINE

Line, with a 10° width and a 50° fan angle, projects a thin, narrow beam of illumination.




ILLUMINATION


LC300 Series of Linear Lights works best for:



Bright Field



Direct Lighting



Dark Field

When To Use a Linear Polarizer

Polarizing filters can reduce reflections on specular (dielectric or nonmetal) surfaces.

A Linear Polarizer has a typical transmission of 38 percent while blocking 62 percent of the light not in the polarization plane.

WARNING: Running a light in continuous operation while using a standard polarizer with certain wavelengths (e.g. white, blue) may burn the polarizer.



EYE SAFETY



According to IEC 62471:2006. Full documentation available upon request.

Notice

Exempt Group: No photobiological hazard to eyes or skin even for continuous, unrestricted use. Applicable for wavelengths 625, 850, and 940.

Caution

Risk Group 1: Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to eyes. Safe for most applications except prolonged exposure. Applicable for wavelengths 470, 505, 530, and WHI.



ACCESSORIES

Power Cables		Mount		Mounting Rails		Power Adapters *	
Length	Part Number	Description	Part Number	Length	Part Number	Description	Part Number
5 m	5PM12-5	3-Axis Pan and Tilt Mount	PB300-M5	300mm	LEXT300	AC, 24 V, 1.7 A	T1 Power Supply
10 m	5PM12-10			600mm	LEXT600		
15 m	5PM12-15			900mm	LEXT900		
				1200mm	LEXT1200		
				Custom sizes available			

Diffuser		Linear Polarizer	
Description	Part Number	Description	Part Number
Diffuser Kit	L300-DKIT	Linear Polarizer Kit	L300-LP

* European Versions Available (Add "-EURO" to end of T1. Ex: T1-EURO Power Supply.)



GLOSSARY

This glossary covers all Smart Vision Lights product families; some content in this section may not apply to this specific light.

TERMINOLOGY

OverDrive™ Lights include an integrated high-pulse driver for complete LED light control.

Continuous Operation Lights stay on continuously.

Multi-Drive™ Combines continuous operation and OverDrive™ strobe (high-pulse operation) mode into one easy-to-use light.


Built-In Driver The built-in driver allows full function without the need for an external controller.

Camera to Light Connect the light directly to the camera, without the need for additional controllers or equipment.

Polarizers Filters that reduce reflections on specular surfaces.


Diffuser Used to widen the angle of light emission, reduce reflections, and increase uniformity.

TYPES OF ILLUMINATIONS

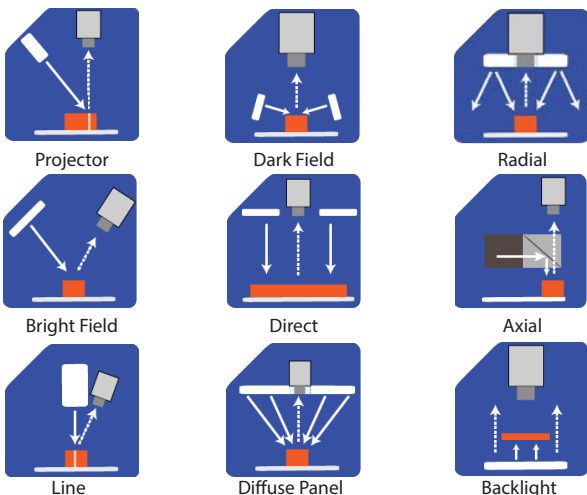

COLOR/WAVELENGTHS LEGEND

Wavelength options range from 365 nm to 1550 nm.*
Additional wavelengths available for many light families.



*See Part Number section for **this light's** available standard wavelengths.



Shortwave infrared LEDs are available in 1050 nm, 1200 nm, 1300 nm, 1450 nm, and 1550 nm.