


LSR SERIES Linear Light MULTI-DRIVE™

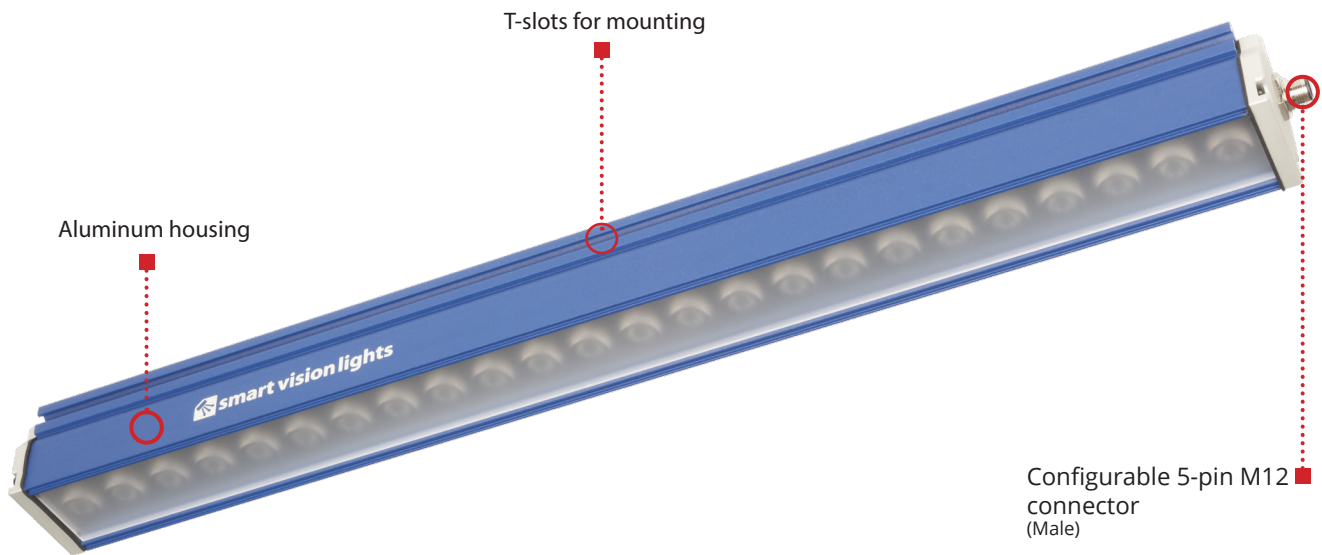

The LSR series is a SmartVisionLink™-enabled linear light that can produce over 340,000 lux and is offered in lengths up to 1200 mm. When used with the BTM-1000 Bluetooth accessory¹ and the SmartVisionLink™ app, the LSR Series can have its intensity remotely adjusted. The LSR Series is easily mounted with the built-in T-slot rail system.

LSR SERIES HIGHLIGHTS

Warranty 10 YEAR	Tested IEC 62471	Compliant CE ROHS	Rated IP 65	Connector 5-PIN M12
--------------------------------	--------------------------------	---------------------------------	---------------------------	-----------------------------------

- ✓ Multi-Drive™ provides the ability for either continuous or OverDrive™ strobe modes.
- ✓ SmartVisionLink™-enabled to allow for easy intensity adjustment in both continuous and OverDrive™ strobe modes. ¹
- ✓ IP65 sealed

¹ BTM-1000 sold separately

² Only while using the SmartVisionLink™ app



SPECIFICATIONS

	Continuous Operation	OverDrive Operation
Electrical Input	24 VDC +/- 5%	
Input Current	Max. 950 mA per 300 mm segment	Max. 6 A per 300 mm segment
Input Power	Max. 22.8 W per 300 mm segment	Max. 144 W per 300 mm segment
PNP Trigger	2 mA @ 4 VDC 7 mA @ 13.4 VDC 20 mA @ 24VDC	
NPN Trigger	12 mA @ Common (0VDC)	
Trigger Input	PNP > +4 VDC (24 VDC max.) to activate or NPN > GND (<1VDC) to activate (not both)	PNP > +4 VDC (24 VDC max.) to activate or NPN > GND (<1VDC) to activate (not both)
Mode Control	Connect pin 5 to 1-10 VDC (10 - 100% output); 24 VDC (Max)	Connect pin 5 to GND (See wiring configuration for more information)
Strobe Duration	Min. 10 μ s Max. ∞	Min. 10 μ s Max. 50 ms
Strobe Frequency	Max 4 kHz or 1 / Duty Cycle as calculated, whichever is less. ¹	
Duty Cycle	Not applicable	Max. 10% ¹
Analog Intensity	The output is adjustable from 10% - 100% of intensity limit by a 1 - 10 VDC signal. Jumpering pin 5 to pin 1 will provide maximum intensity. Intensity can be remotely adjusted via SmartVisionLink™ ²	
Connection	5-pin M12 connector	
Operating Temperature	-10° - 40° C (14° - 104° F) RH max 80% non-condensing humidity	
Storage Temperature	-20° to 70° C RH max 80% non-condensing humidity	
IP Rating	IP65	
Weight	LSR300: 1.8 lbs (~816 g) LSR600: 3.2 lbs (~1.45 kg) LSR900: 4.8 lbs (~2.17 kg) LSR1200: 6.5 lbs (~2.95 kg)	
Compliances	CE, IEC-62471, RoHS	
Warranty	10 years ³	


¹See page 4 for more information

²SmartVisionLink™ requires the purchase of the BTM-1000 bluetooth module, sold separately, and the SmartVisionLink™ app, free to download on the Apple App and Google Play stores.

³See SmartVisionLights.com/warranty for details.

WIRING CONFIGURATION

CONTINUOUS OPERATION MODE



Pin layout for light (Male Connector)

Pins	Function	Signal	Wire Color
1	Power In	+24VDC	BROWN
2	NPN	Sinking Signal	WHITE
3	GND	Ground	BLUE
4	PNP	Sourcing Signal	BLACK
5	Intensity Control	1-10VDC	GREY

For maximum intensity, tie pin 5 to pin 1 at +24 VDC.


For continuous mode: PNP (pin 4) can be tied to +24 VDC (pin 1) **or** NPN (pin 2) can be tied to Ground (pin 3).

For proper light function, apply either a PNP or NPN signal, not both.

Failure to supply light with correct input current will result in inconsistent lighting behavior.

(see Product Specifications for requirements)

OVERDRIVE™ OPERATION MODE



Pin layout for light (Male Connector)

Pins	Function	Signal	Wire Color
1	Power In	+24VDC	BROWN
2	NPN	Sinking Signal	WHITE
3	GND	Ground	BLUE
4	PNP	Sourcing Signal	BLACK
5	OverDrive™ Signal	Ground	GREY

To enable OverDrive™ mode, tie pin 5 to pin 3.

For proper light function, apply either a PNP or NPN signal, not both.

Failure to supply light with correct input current will result in inconsistent lighting behavior.

(see Product Specifications for requirements)

LENS OPTICS


NARROW (Standard)

The standard lens option uses a 10° beam angle lens. Standard lenses create a narrow beam of illumination and are used for long working distances.



LINE

The line lens option uses a 10° x 50° beam angle lens. They project a thin, narrow beam of illumination.



WIDE

The wide lens option uses a 30° beam angle lens. They create a floodlight effect and can be used for short working distances.




LIGHTING PATTERNS


The LSR Series is recommended to be used at a working distance between 300 mm to 2000 mm. Illuminance values taken on white light - 5700K

Standard (10°) lighting patterns

Illuminance vs. Working Distance

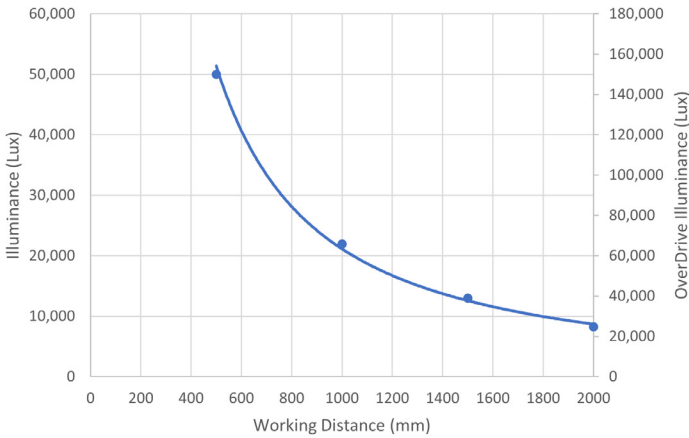


Beam Size at 80% Max Intensity vs. Working Distance

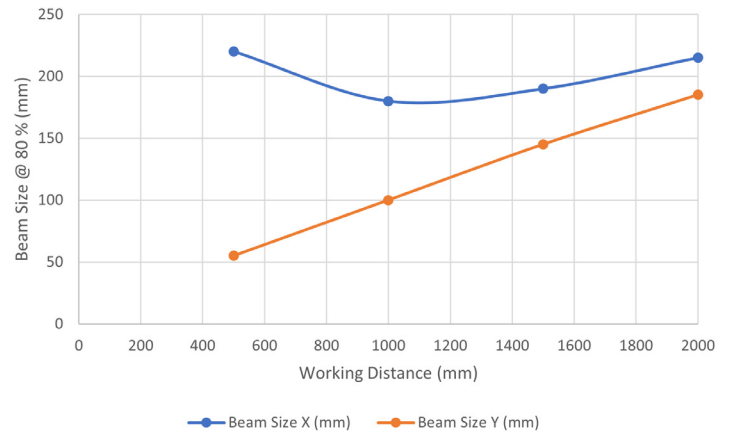


Wide (30°) lighting patterns

Illuminance vs. Working Distance


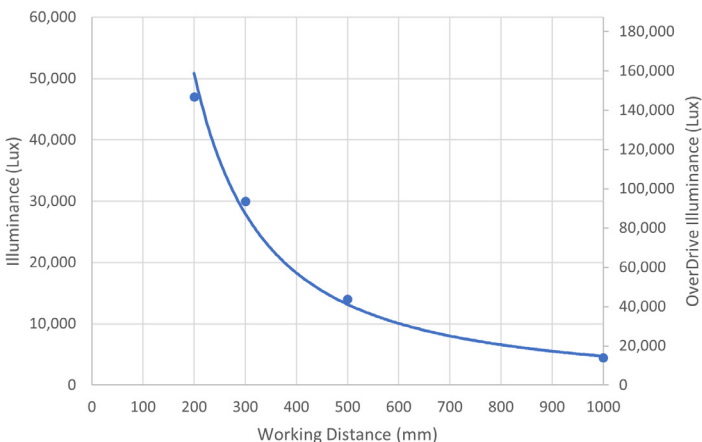


Beam Size at 80% Max Intensity vs. Working Distance

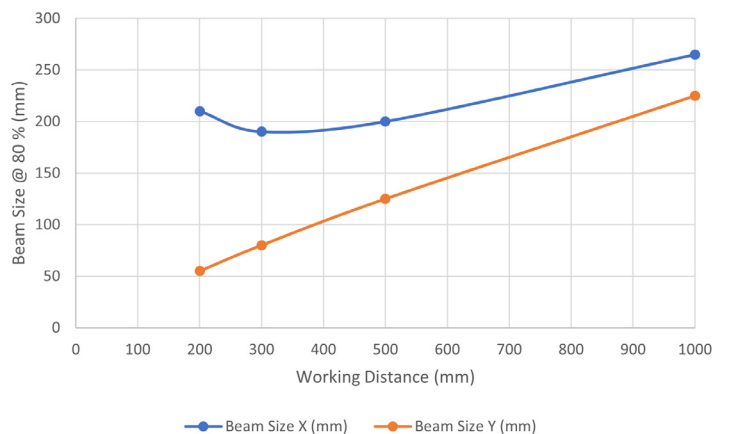

LIGHTING PATTERNS (continued)

Line (10° x 50°) lighting patterns


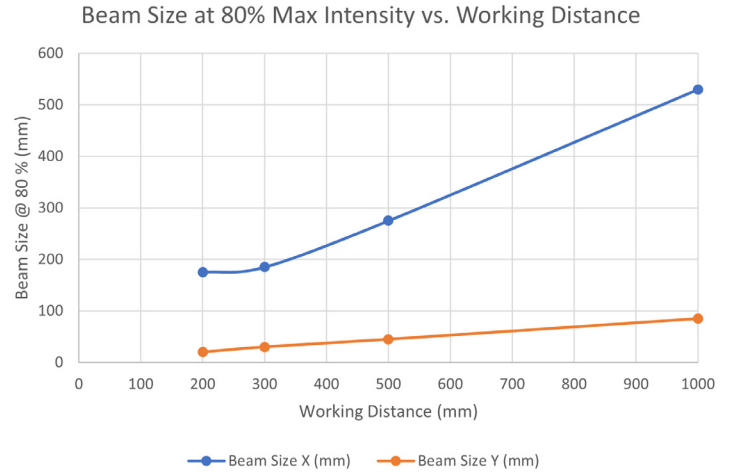
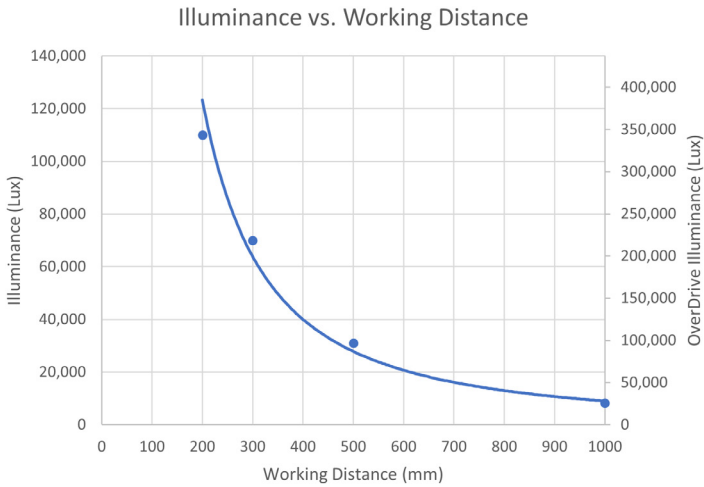


BEAM PATTERNS

The LSR Series is recommended to be used at a working distance between 300 mm to 2000 mm. Illuminance values taken on white light - 5700K




Standard (10°) beam patterns

Grid set to 75 mm

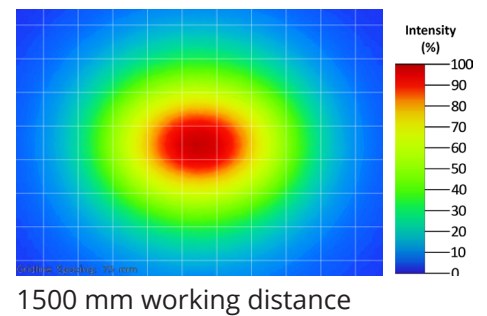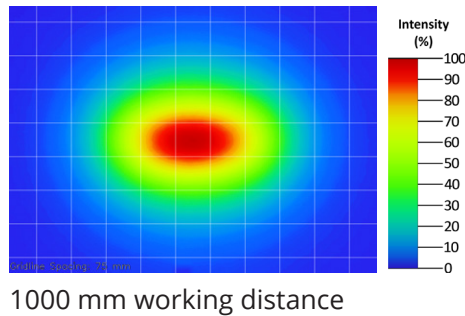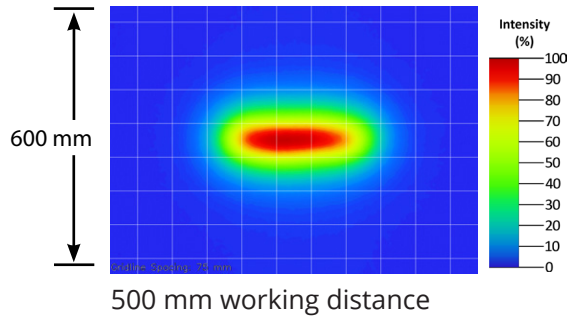

Wide (30°) beam patterns


Grid set to 75 mm

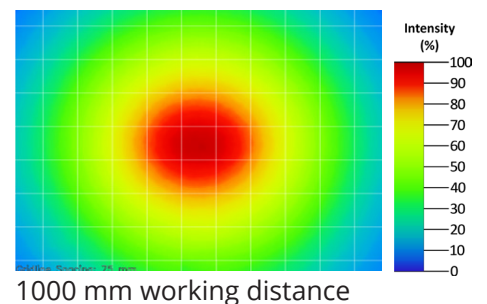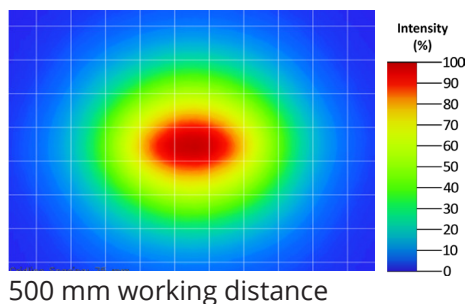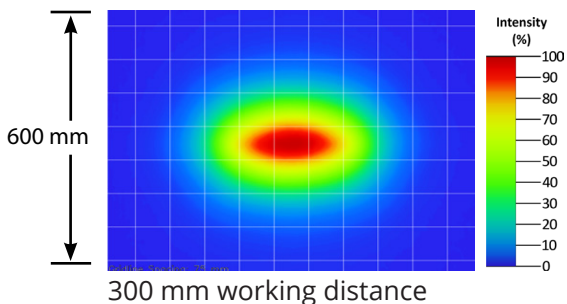

BEAM PATTERNS (continued)

Line (10° x 50°) beam patterns

Grid set to 75 mm

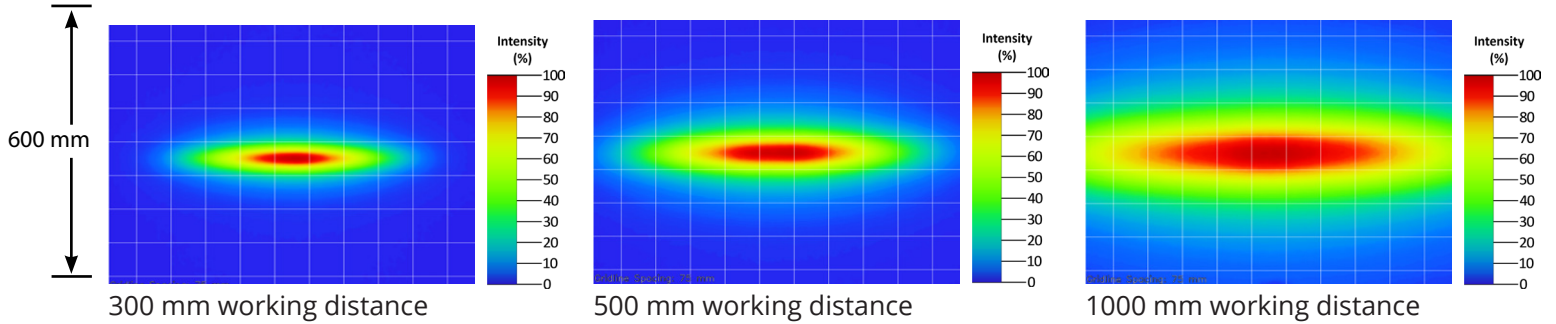

EYE SAFETY

According to IEC 62471:2006. Full documentation available upon request.

Notice

Exempt Group: No photobiological hazard to eyes or skin even for continuous, unrestricted use. Applicable for wavelengths 625, 850, and 940.

Caution


Risk Group 1: Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to eyes. Safe for most applications except prolonged exposure. Applicable for wavelengths 470, 530, and WHI.

Caution

Risk Group 2: UV emitted from this product. Eye or skin irritation may result from exposure. Use appropriate shielding. Does not pose optical hazard if aversion responses limit exposure. Applicable for wavelength 365 and 395.

ILLUMINATION


The LSR series works best for:

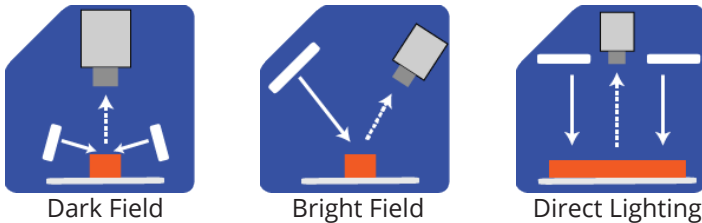

DUTY CYCLE

This section applies only if light is in OverDrive™ strobe mode.

The Duty Cycle (D) is related to the Strobe Time (ST) and Rest Time (RT).

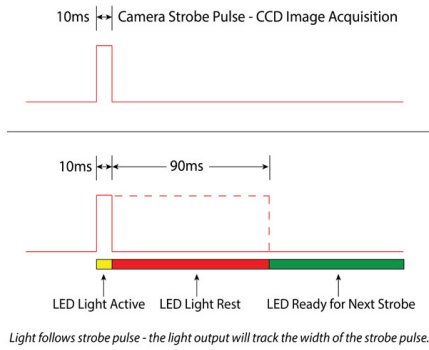

Calculating Rest Time

$$RT = \frac{ST}{D} - ST$$

RT = Rest Time
ST = Strobe Time
D = Duty Cycle

Example

$$90 \text{ ms} = \frac{10 \text{ ms}}{.1} - 10 \text{ ms}$$

Rest Time is 90 ms for 10 ms Strobe Time

Calculating Strobe Rate

$$SR = \frac{D}{ST}$$

SR = Strobe Rate (strokes per second)
ST = Strobe Time (seconds)
D = Duty Cycle

Example

$$1000 = \frac{0.1}{0.0001}$$

Strobe Rate is 1000 strokes per second

Calculating Duty Cycle

$$D = ST \times SR$$

SR = Strobe Rate (strokes per second)
ST = Strobe Time (seconds)
D = Duty Cycle

Example

$$0.1 = 0.0001 \times 1000$$

Duty Cycle is 10% (0.1)

Maximum Duty Cycle for OverDrive™ light is 10% (0.1)

Maximum Strobe Frequency is 1/ calculated duty cycle or 4,000 strokes per second, whichever is less.

SMARTVISIONLINK™

The LSR Series is SmartVisionLink™-enabled and is designed so intensity can be adjusted using the SmartVisionLink™ app*.

SmartVisionLink™ provides a way for a light to communicate with an app on a mobile device or tablet. This technology allows users to adjust the intensity of the light in both continuous operation and OverDrive™ strobe mode. By connecting the BTM-1000 Bluetooth module to a light that is SmartVisionLink™-enabled, a user can adjust parameters for the light. The SmartVisionLink™ app is available free to download in the Apple App and Google Play Stores.

Visit SmartVisionLights.com/SmartVisionLink for more information.


*Requires the purchase of the BTM-1000 bluetooth module, sold separately.



CONNECTING A BTM-1000

The BTM-1000 can be connected directly to a light or attached to a jumper cable that is connected to a light. Once the light's intensity is set to a desired level, the BTM-1000 can be removed from the light or cable.

The pigtail end of the BTM-1000 is connected directly to the light or to the cable attached to the light - sold separately.

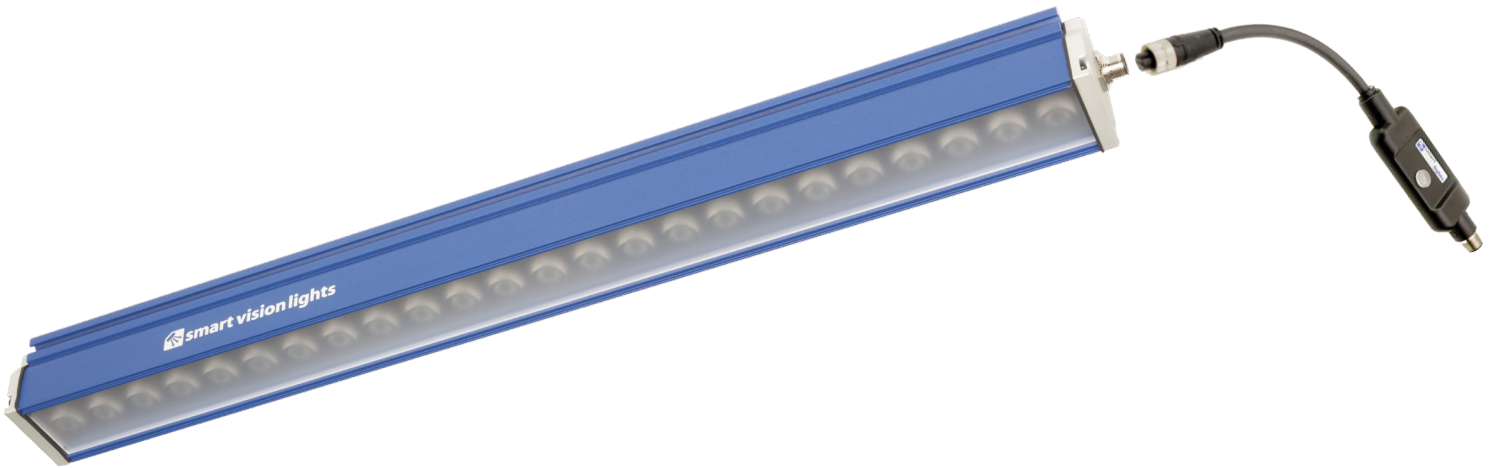

*For reference only. Diagram not to scale.

MULTI-DRIVE™

Multi-Drive™ provides both continuous and OverDrive™ modes from a single integrated driver. Users can select the lighting mode via the input wiring configuration. With OverDrive™, the light can be strobed at up to 10 times the intensity* of continuous mode.

*See lighting section for more information on this light's OverDrive values.



SAFESTROBE™

SafeStrobe™ is a unique technology that applies safe working parameters to ensure high current LEDs are not damaged by driving them beyond their limits, such as maximum strobe time or duty cycle. This is especially beneficial for overdriving our high current LEDs.

PART NUMBER GUIDE

LSR - -

SIZE:
300 mm
600 mm
900 mm
1200 mm

COLOR:

WHI 365 395 470
530 625 850 940


LENS:
Leave blank for Standard (Narrow, 10°)
W30 = Wide (30°)
L10 = Line (10° x 50°)

Part Number Examples:


- LSR300-625** LSR, 300 mm, 625 nm Red Wavelength
- LSR600-WHI** LSR, 600 mm, White Wavelength

Additional wavelengths and lens options available upon request.

ACCESSORIES




Power Cables	
	
Lengths	Part Number
5 m	5PM12-5
10 m	5PM12-10
15 m	5PM12-15

Mount	
	
Description	Part Number
3-Axis Pan and Tilt Mount	PB300-M5

SmartVisionLink™	
	
Part Number	Description
BTM-1000	Bluetooth Module





PRODUCT DRAWINGS (LSR300)

*CAD files available on our website
Drawings are in mm

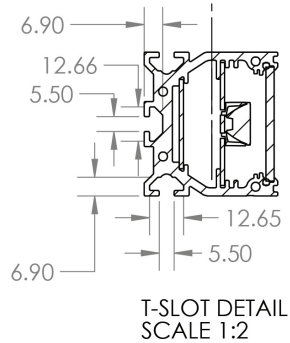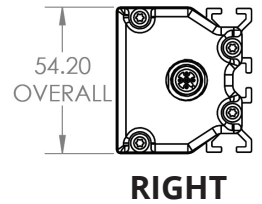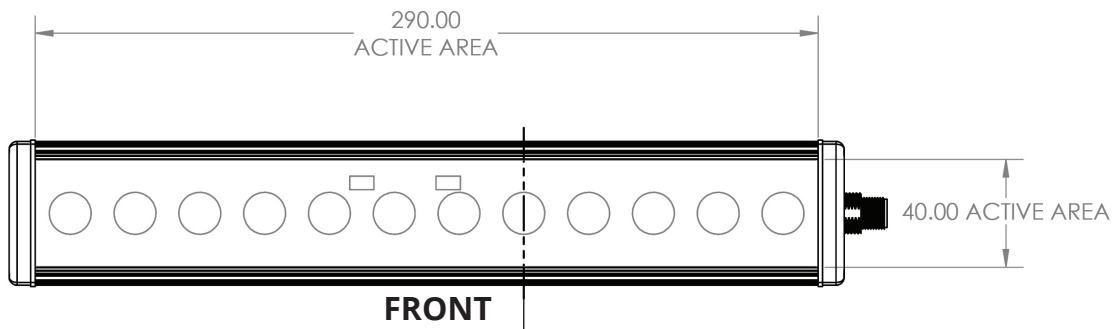




PRODUCT DRAWINGS (LSR600)

*CAD files available on our website
Drawings are in mm

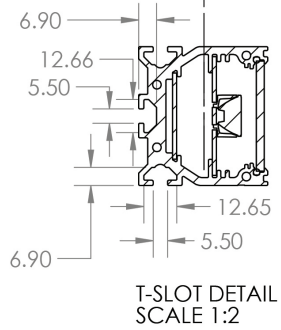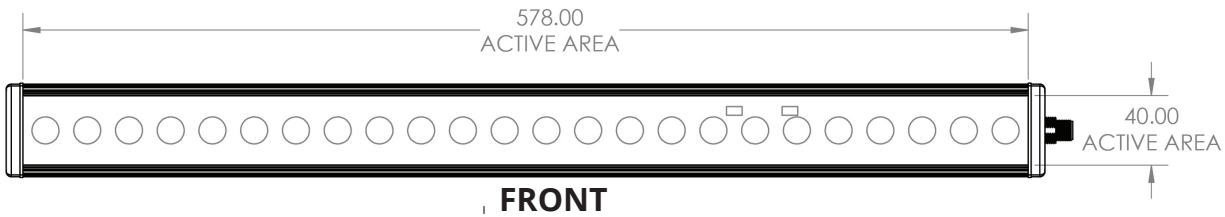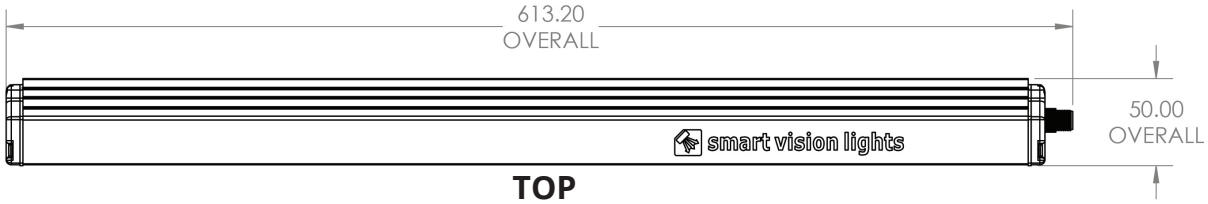





PRODUCT DRAWINGS (LSR900)

*CAD files available on our website
Drawings are in mm

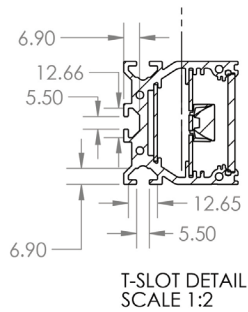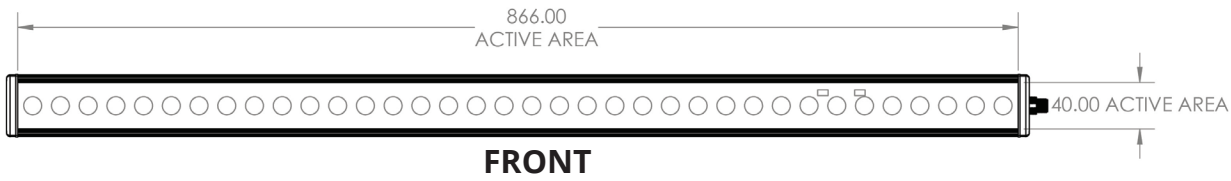

PRODUCT DRAWINGS (LSR1200)

*CAD files available on our website
Drawings are in mm

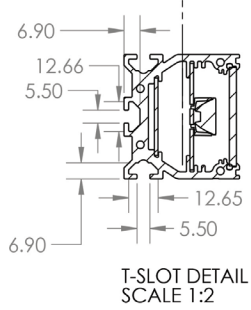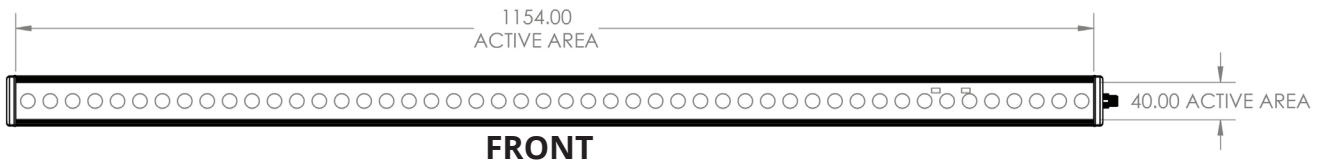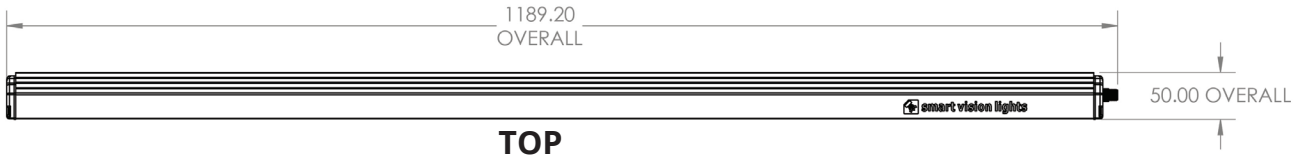

GLOSSARY

This glossary covers all Smart Vision Lights product families; some content in this section may not apply to this specific light.

TERMINOLOGY

Continuous Operation The light stays on continuously.

OverDrive™ Integrated driver that produces a high-current strobe to the LEDs to drive them beyond their nominal continuous operation output.

Multi-Drive™ Integrated driver that combines continuous operation and OverDrive™ strobe mode

NanoDrive™ Integrated driver that provides fast switching where the light can go from off to on in less than 500 ns.

Built-in Driver The driver contained within the light that controls the current to the LEDs and provides PNP, NPN, and analog dimming controls.

SmartVisionLink™ Integrated feature that enables lighting control through the Bluetooth module and app.

Camera to Light Connect the light directly to the camera, without the need for additional controllers or equipment.

Polarizers Filters that reduce reflections on specular surfaces.

Diffusers Widens the angle of emission by scattering light in all directions.


Pattern Area Lighting Modulated lighting pattern placed over a backlight's surface used to enhance defect detection on transparent and glossy surfaces

SafeStrobe Limiter to keep the light in safe working parameters.


Direct Connect Connect lights in a series without the use of cables.

Daisy-Chain Connect lights in a series with the use of cables.


TYPES OF ILLUMINATION



Projector




Dark Field




Radial




Bright Field




Direct




Axial



Line



Diffuse Panel




Backlight



Dome
"Light Tent"

COMMON COLOR / WAVELENGTHS LEGEND

Wavelengths options range from 365 nm to 1650 nm.*
Additional wavelengths available for many light families.



*See Part Number section for **this light's** available standard wavelengths.



Shortwave Infrared LEDs are available in 1050 nm, 1200 nm, 1300 nm, 1450 nm, 1550 nm, and 1650 nm.*

*Check Part Number section to see if **this light** is available in SWIR wavelengths.



ISO 9001:2015 Certified QMS