




smart vision lights

LXE300

Direct Connect
LINEAR LIGHT
MULTI-DRIVE™

P R O D U C T D A T A S H E E T

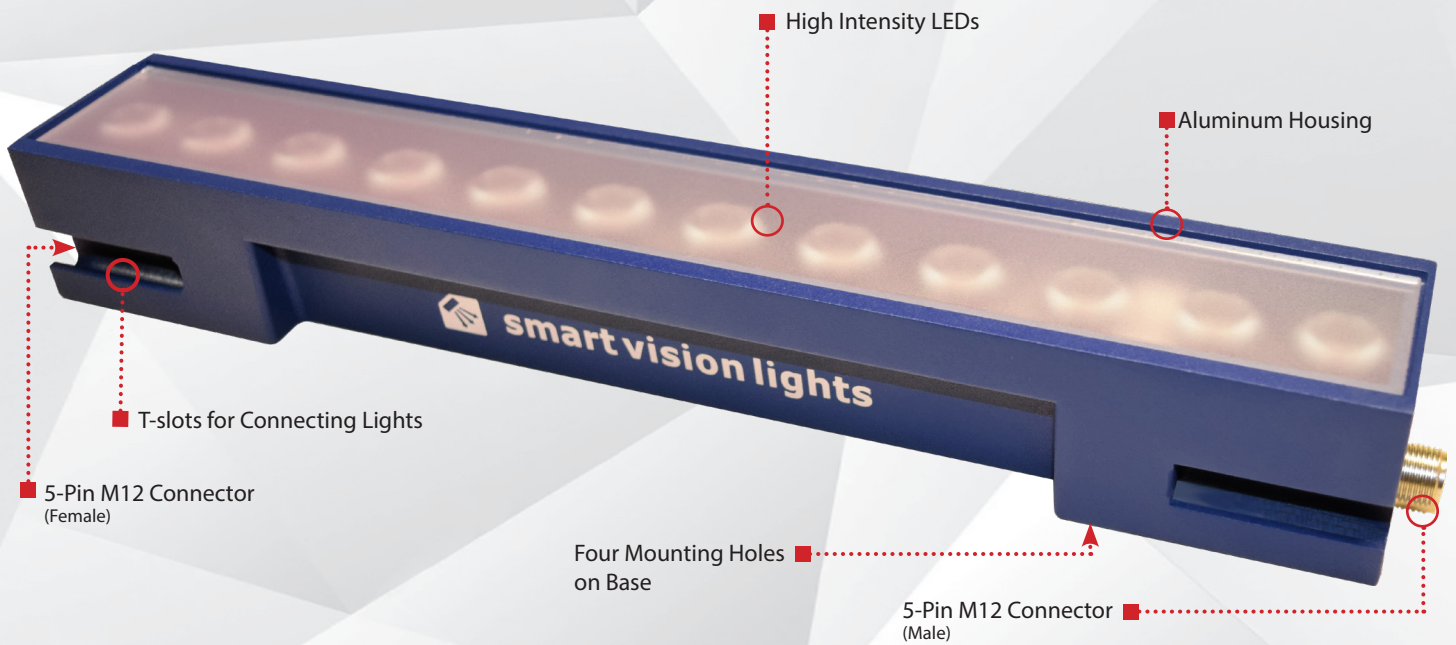

Warranty 10 YEAR	Compliant IEC 62471	Compliant CE RoHS	Rated IP 65	Connector 5-PIN M12
-------------------------------	----------------------------------	--------------------------------	---------------------------------	---

PRODUCT HIGHLIGHTS

- ✓ Bright linear light, delivering up to 100,000 lux in OverDrive™ mode
- ✓ Direct connect up to six lights in a line without loss of uniformity for a fraction of the cost of monolithic designs
- ✓ Built-in Multi-Drive™ allows the light to work in continuous operation or OverDrive™ mode
- ✓ PNP and NPN strobe input
- ✓ 5-pin M12 quick connect





PRODUCT DESCRIPTION

Delivering up to 100,000 lux, the LXE300 includes our advanced Multi-Drive™ driver, allowing users to operate the linear light in continuous operation or OverDrive™ strobe (high-pulse operation) mode. Users can also direct connect up to six LXE300 lights to create ultra-long linear lights at a fraction of the cost of traditional monolithic solutions without any loss in uniformity. The LXE300 can also be connected by daisy-chaining them together using a locking jumper cable. The LXE300 Linear Light is rated for IP65.



PRODUCT SPECIFICATIONS

	CONTINUOUS OPERATION	OVERDRIVE™ STROBE MODE
Electrical Input	24VDC +/- 5%	
Input Current	Max. 850 mA	Max. 4.7 A
Wattage	Max. 20 W	Max. 110 W (During Strobe)
PNP Line	4 mA @ 4VDC 10 mA @ 12VDC 20 mA @ 24VDC	
NPN Line	15 mA @ Common (0 V DC)	
OverDrive™ Strobe Mode	Not applicable	Connect pin 5 to GND (see Wiring Configuration for more information)
Strobe Duration	Not applicable	Min. 10 μs Max. 50 ms
Duty Cycle	Not applicable	Max. 10%
Strobe Input	Not applicable	PNP: +4 VDC or greater to activate NPN: GND (<1VDC) to activate
Continuous Operation Mode	NPN can be tied to ground OR PNP can be tied to 24VDC (not both)	Not applicable
On/Off Input	PNP: +4VDC or greater to activate NPN: GND (<1VDC) to activate	Not applicable
Connection	5-pin M12 connector	
Ambient Temperature	-18°–40° C (0°–104° F)	
IP Rating	IP65	
Weight	~660 g	
Power Supply	A separate power supply for OverDrive™ mode (high-pulse operation) is recommended. (see Input Current for value)	
Compliances	CE, RoHS, IEC 62471	
Warranty	10 year. For complete warranty information, visit smartvisionlights.com/warranty	




RESOURCE CORNER

Additional resources are available on our website, including CAD files, videos, and application examples.

WIRING CONFIGURATION

CONTINUOUS OPERATION MODE




Pin layout for light (male connector)

Pins	Function	Signal	Wire Color
1	Power In	+24VDC	BROWN
2	NPN	Sinking Signal	WHITE
3	GND	Ground	BLUE
4	PNP	Sourcing Signal	BLACK
5	Intensity Control	1-10VDC	GREY*

* Some cables use green/yellow for pin 5
 For maximum intensity, it is possible to tie pin 5 to pin 1 at +24 V DC.
 For continuous mode: PNP (pin 4) can be tied to +24 V DC (pin 1) or NPN (pin 2) can be tied to Ground (pin 3).

For the light to function properly, apply either a PNP or NPN signal, **not both**.
 Failure to supply light with correct input current will result in non-repeatable lighting
 (see Product Specifications for requirements)

OVERDRIVE™ OPERATION MODE



Pin layout for light (male connector)

Pins	Function	Signal	Wire Color
1	Power In	+24VDC	BROWN
2	NPN	Sinking Signal	WHITE
3	GND	Ground	BLUE
4	PNP	Sourcing Signal	BLACK
5	OverDrive™ Signal	Ground	GREY*


* Some cables use green/yellow for pin 5

Failure to supply light with correct input current will result in non-repeatable lighting
 (see Product Specifications for requirements)


CONNECTING A 5-PIN M12 CABLE

WARNING:

When connecting a 5-pin M12 cable to the male connector on the LXE300, **do not** twist the cable. Tighten the nut only. Twisting the cable may result in damage to the pins.

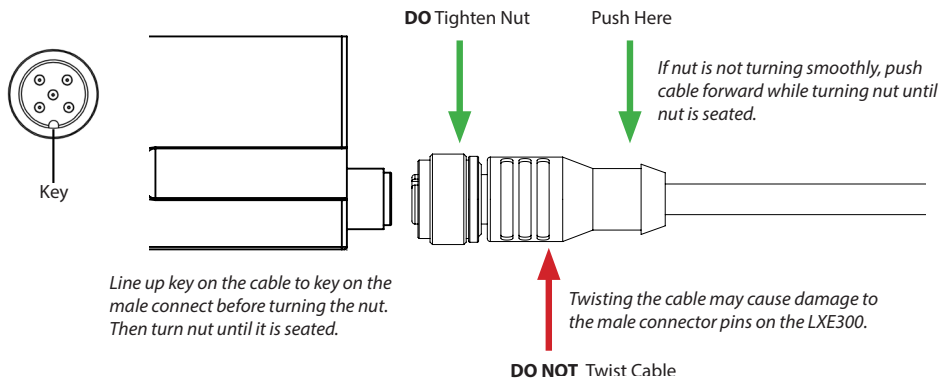

Line up key on the cable to key on the male connect before turning the nut. Then turn nut until it is seated.

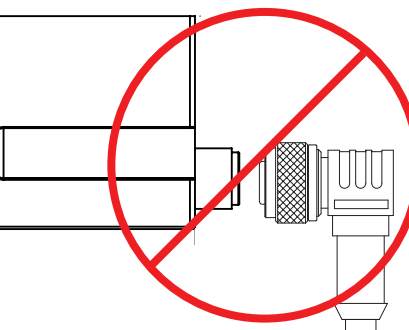

WARNING:
 Smart Vision Lights recommends not using a right angle cable with the LXE300.

If you do need to use a right angle cable:

- Do not put rotational force on the connector
- Once the cable is connect, secure the cable to prevent the cable from rotating.


Damage caused by a right angle cable may result in the warranty being voided.




LIGHT PATTERNS

Smart Vision Lights recommends the LXE300 be used at a working distance between 300 mm to 4000 mm.


Illumination measurement taken on White Light – 6500 K

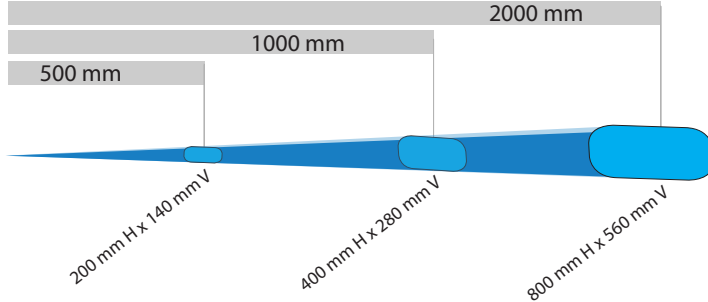

Illumination measurement taken on White Light – 6500 K

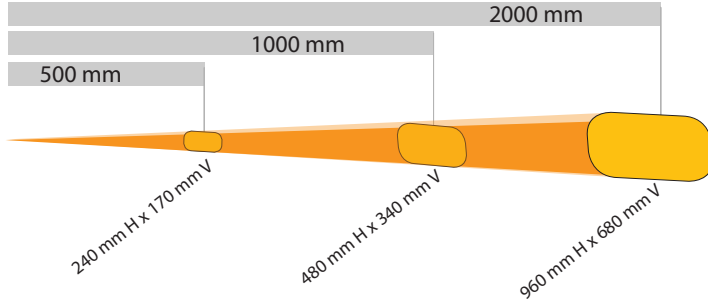

Illumination measurement taken on White Light – 6500 K

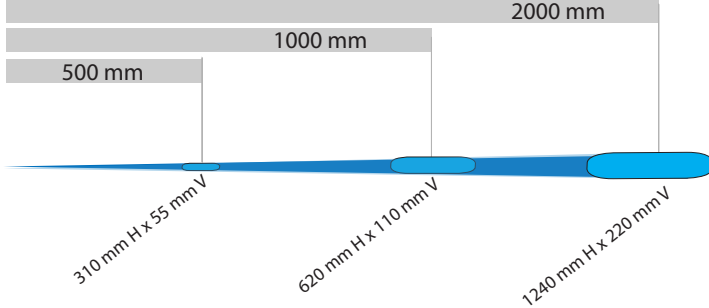

LIGHTING PATTERN FOR THE LXE300 with Narrow (Standard) Lenses

Working Distance mm (inches)	Pattern (80% – 100% Measured Intensity) mm (inches)
500 mm (19.7")	200 mm (~7.8") H x 140 mm (~5.5") V
1000 mm (39.4")	400 mm (~15.7") H x 280 mm (~11") V
2000 mm (78.8")	800 mm (~31.5") H x 560 mm (~22") V

Operation	Typical Output Performance	Illumination (Lux)
Continuous Mode	Distance = 500 mm	20,000
OverDrive™ Mode	Distance = 500 mm	100,000

Illumination measurement taken on White Lights – 6500K

LIGHTING PATTERN FOR THE LXE300 with Wide (W) Lenses

Working Distance mm (inches)	Pattern (80% – 100% Measured Intensity) mm (inches)
500 mm (19.7")	240 mm (~9.4") H x 170 mm (~6.7") V
1000 mm (39.4")	480 mm (~18.9") H x 340 mm (~13.4") V
2000 mm (78.8")	960 mm (~37.8") H x 680 mm (~26.7") V

Operation	Typical Output Performance	Illumination (Lux)
Continuous Mode	Distance = 500 mm	8600
OverDrive™ Mode	Distance = 500 mm	43,000

Illumination measurement taken on White Lights – 6500K

LIGHTING PATTERN FOR THE LXE300 with Line (L) Lenses


Working Distance mm (inches)	Pattern (80% – 100% Measured Intensity) mm (inches)
500 mm (19.7")	310 mm (~12.2") H x 55 mm (~2.1") V
1000 mm (39.4")	620 mm (~24.4") H x 110 mm (~4.3") V
2000 mm (78.8")	1240 mm (~48.8") H x 220 mm (~8.7") V

Operation	Typical Output Performance	Illumination (Lux)
Continuous Mode	Distance = 500 mm	18,000
OverDrive™ Mode	Distance = 500 mm	90,000


Illumination measurement taken on White Lights – 6500K

The LXE300 Linear Light produces a uniform light pattern.


Working Distance = 500 mm (Grid set to 25 mm x 25 mm)

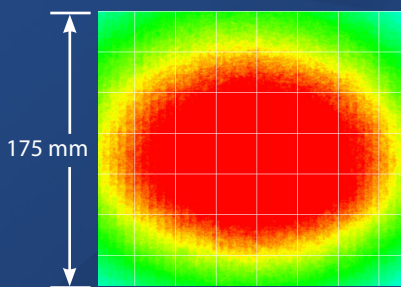

Narrow



Wide



Line

MULTI-DRIVE™

Multi-Drive™ allowing users to operate the light in continuous operation or OverDrive™ strobe (high-pulse operation) mode. An advantage of Multi-Drive™ is faster imaging. It also enhances capture/freeze motion imaging on high-speed lines.




The Multi-Drive™ feature allows the user to run the light in continuous operation or OverDrive™ strobe mode at maximum intensity. OverDrive™ strobe mode is **up to five times** the power of continuous operation.

DUTY CYCLE (OVERDRIVE™ MODE ONLY)

This section applies only if light is in OverDrive™ Mode.

The Duty Cycle (D) is related to the Strobe Time (ST) and Rest Time (RT).

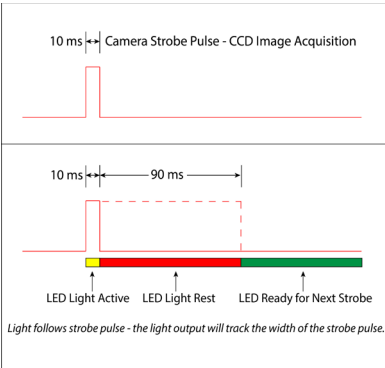

Calculating Rest Time

$$RT = \frac{ST}{D} - ST$$

RT = Rest Time
ST = Strobe Time
D = Duty Cycle

Example


$$RT = \frac{10 \text{ ms}}{.1} - 10 \text{ ms} = 90 \text{ ms}$$

Rest Time is 90 ms for 10 ms Strobe Time

Maximum Duty Cycle for OverDrive™ light is 10% (0.1)

ILLUMINATION

LXE300 Series of Linear Lights works best for:

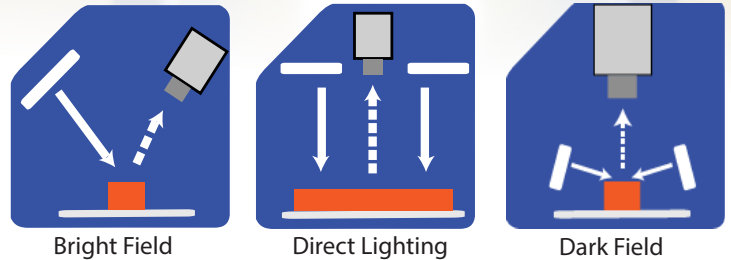

EYE SAFETY

According to IEC 62471:2006. Full documentation available upon request.



Notice

Exempt Group: No photobiological hazard to eyes or skin even for continuous, unrestricted use. Applicable for wavelengths: 625, 850, and 940.

Caution

Risk Group 1: Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to eyes. Safe for most applications except prolonged exposure. Applicable for wavelengths: 470, 505, 530, and WHI.



PART NUMBER

LXE300 —



COLOR:



LENS:

Leave blank for standard (narrow)

W = Wide

L = Line



LINEAR POLARIZER:

Leave blank for none

LPI = Factory Installed



CONNECTOR:

Leave blank for Direct Connect

DC = Daisy-Chain

PG = Plug

Additional wavelengths and lens options available upon request. UV wavelengths are not available.

Part Number Examples:

LXE300-625 LXE300, 625 Red Wavelength, Standard (Narrow) Lenses

LXE300-WHI-W LXE300, White, Wide Lenses

LXE300-WHI-W-DC LXE300, White, Wide Lenses, Daisy-Chain

LXE300-470-W-LPI LXE300, 470 Blue Wavelength, Wide Lenses, Linear Polarizer Installed



STANDARD LENS OPTICS

NARROW

Narrow lenses are standard.

Standard lenses create a narrow beam of illumination. They can be used when long working distances are needed. Narrow are 10° angle cone lenses.

WIDE

Wide lenses create a large area of illumination. Wide lenses can be used when short working distances are needed. Wide are 25° angle cone lenses.

** Additional lens options available upon request.*



MOUNTING

Four screw holes are located on the bottom of the light for easy mounting.



Four M5 screws included with light.

When to Use a Linear Polarizers?

Polarizing filters can reduce reflections on specular surfaces.

A Linear Polarizer has a typical transmission of 38% while blocking 62% of the light not in the polarization plane.





WARNING: Running a light in continuous operation while using a polarizer with certain wavelengths (ex. white, blue) may result in burning of the polarizer.







PRODUCT DRAWING

CAD files available on our website.
Dimensions are in mm




Direct Connect

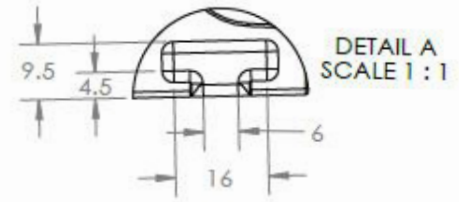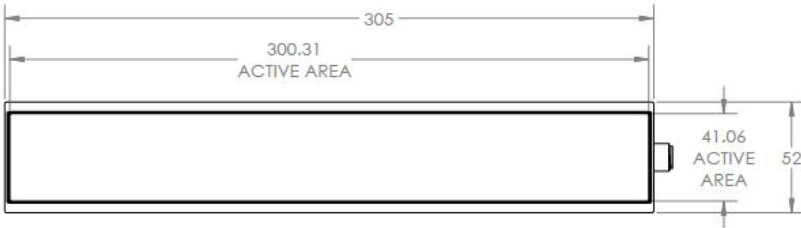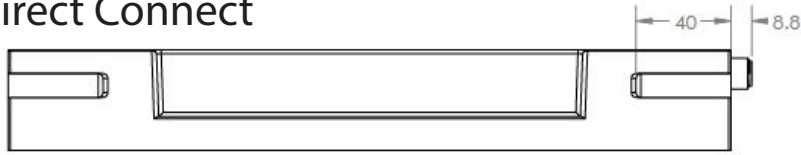

Daisy-Chain

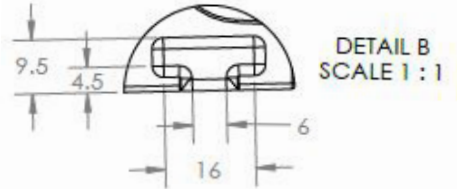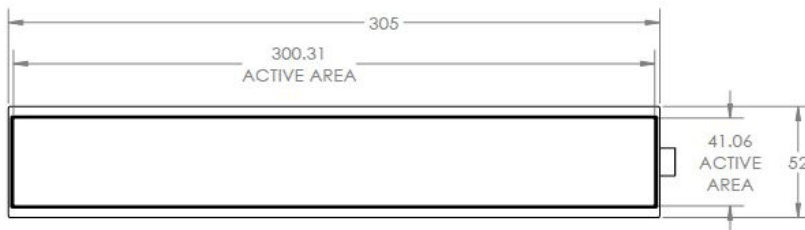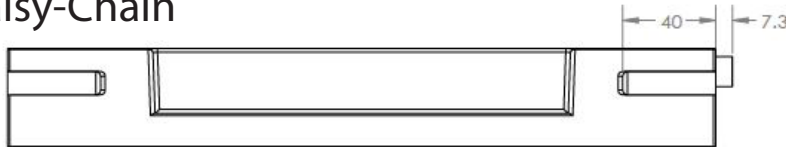


Plug Connector

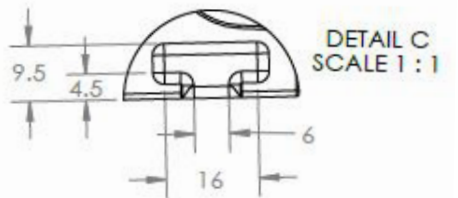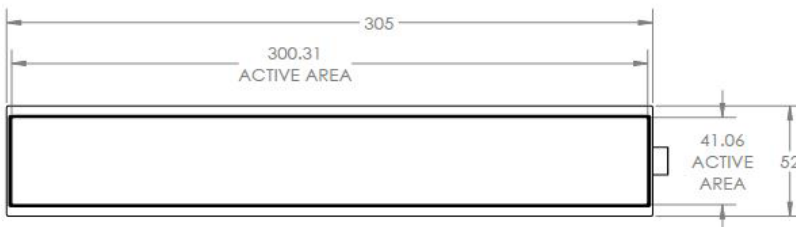


DIRECT CONNECT

The LXE300 allows for connecting lights together with no additional cables. Lights are directly connected together, with no space between the lights. Up to six LXE300 lights can be directly connected together.




5-Pin M12 Connector (Male)

Alignment Pin

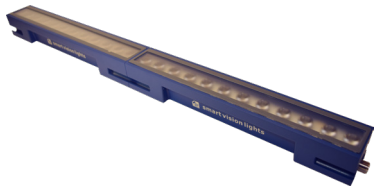


The part number **LXJ-2DTN** is required to directly connect two or more LXE300 together.

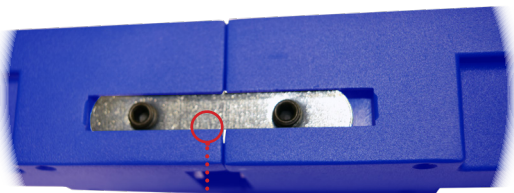

Part Number: LXJ-2DTN

DAISY-CHAIN




5-Pin M12 Connector (Female)

Daisy-chain allows for a locking 5PM-12 jumper cable to be used when connecting LXE300 lights together. Lights are able to be spaced apart from each other. Up to six LXE300 lights can be daisy-chained together.



LXE300 can be daisy-chained together using a locking jumper cable.

PLUG



If multiple units are not going to be used, a plug termination can be ordered. To get this option, use a -PG suffix on the product number.
 Ex. LZE300 - 625 - W - LPI - PG = LZE300, 625 nm, Wide Lens, Linear Polarize Installed, Plug

Plug Connector



ACCESSORIES

Power Cables



Lengths	Part Number
5 m	5PM12-5
10 m	5PM12-10
15 m	5PM12-15

Jumper Cables (Only for Daisy Chaining)



Lengths	Part Number
300 mm	5PM12-J300
1000 mm	5PM12-J1000
2000 mm	5PM12-J2000

Power Adapters *



Description	Part Number
AC, 24 Volt, 1.7 Amp	T1 Power Supply
24VDC, 9 Amp / AC input	T2 Power Supply

* European Versions Available (Add -EURO to end of T1 or T2. Example T1-EURO Power Supply)

Mount



Description	Part Number
3-Axis Pan and Tilt Mount	PB300-M5

Connector (Only for Direct Connect)



Description	Part Number
Set of 2 Connectors	LXJ-2DTN



GLOSSARY

This glossary covers all Smart Vision Lights product families; some content in this section may not apply to this specific light.

TERMINOLOGY

OverDrive™ Lights include an integrated high-pulse driver for complete LED light control.

Continuous Operation Lights stay on continuously.

Multi-Drive™ Combines continuous operation and OverDrive™ strobe (high-pulse operation) mode into one easy-to-use light.


Built-in Driver The built-in driver allows full function without the need of an external controller.

Camera to Light Connecting the light directly to the camera, without the need for additional controllers or equipment.


Polarizers Filters that reduce reflections on specular surfaces.

Diffusers Used to widen the angle of light emission, reduce reflections, and increase uniformity.


TYPES OF ILLUMINATIONS




Projector




Dark Field




Radial




Bright Field




Direct




Axial



Line




Diffuse Panel



Backlight

COMMON COLOR/WAVELENGTHS LEGEND

Wavelengths options range from 365 nm to 1550 nm.*
Additional wavelengths available for many light families.



*See Part Number section for **this light's** available standard wavelengths.



Short Wave Infrared LEDs are available in 1050 nm, 1200 nm, 1300 nm, 1450 nm, and 1550 nm.