

4




3

2

1

B

B

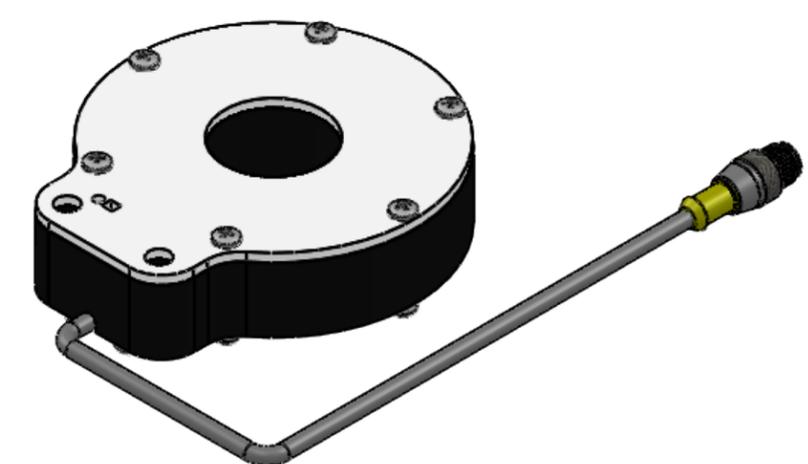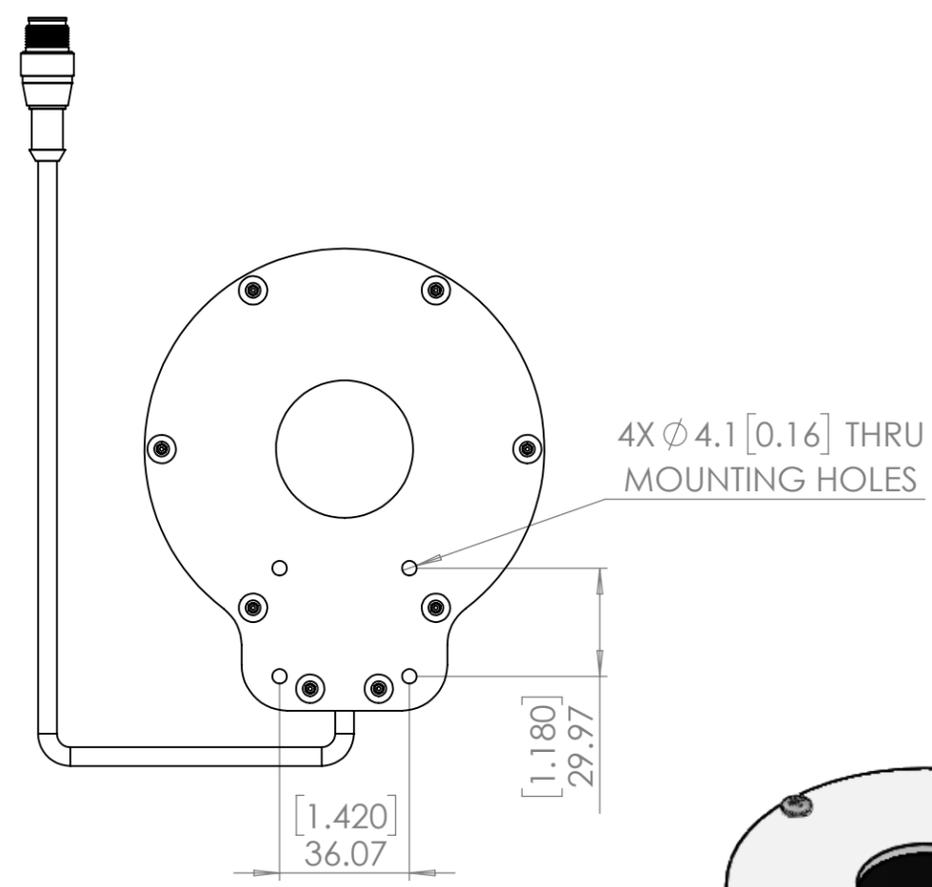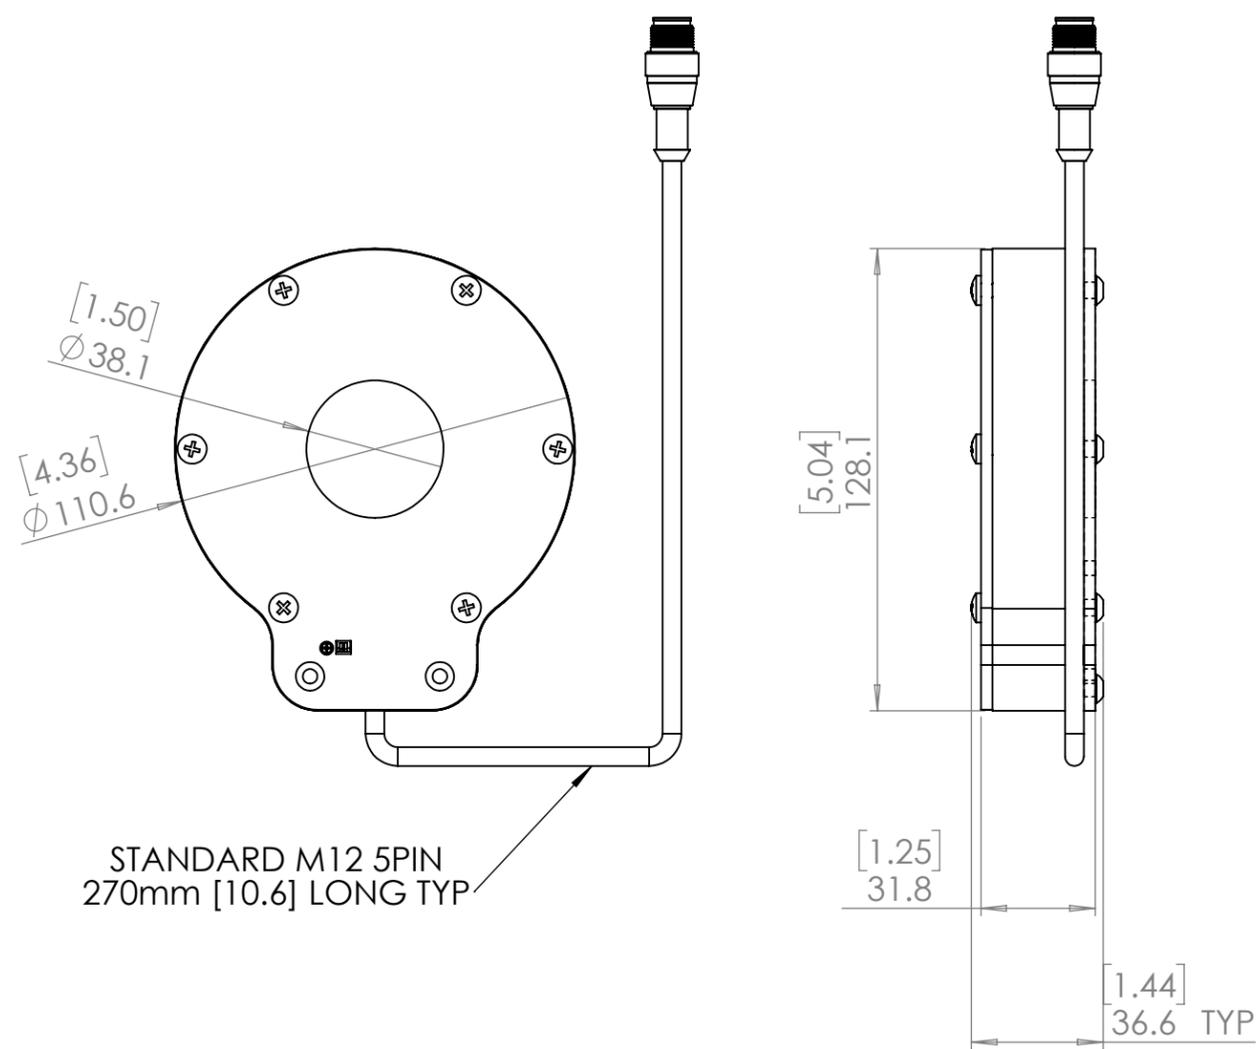

A

A

Wiring	Pin #	Wire Color	Function
	1	Brown	+23.5 to +26.4VDC
	2	White	NPN Strobe Input: GND for "ON", Open or >Vin-1V for "OFF"
	3	Blue	0VDC (DC GND)
	4	Black	PNP Strobe Input: < 1 VDC for "OFF", >3 ≤30 VDC for "ON"
M12	5	Grey or Green/Yellow	0-10VDC analog intensity control – 0V = 100%, 10V = 0%

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN mm [Inch]		DRAWN	DJH 06/11/20
TOLERANCES:		CHECKED	-
ANGULAR: MACH ± BEND ±		ENG APPR.	
TWO PLACE DECIMAL ±0.5		MFG APPR.	
THREE PLACE DECIMAL ±0.25		Q.A.	
FOUR PLACE DECIMAL ±0.125		COMMENTS:	
INTERPRET GEOMETRIC TOLERANCING PER:			
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SPECTRUM ILLUMINATION INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SPECTRUM ILLUMINATION INC IS PROHIBITED.

**SPECTRUM ILLUMINATION**  
 5114 INDUSTRIAL PARK RD.  
 MONTAGUE, MI 49437

Description: 3.5" Ring Light with Internal Driver		
SIZE	DWG. NO.	REV
<b>B</b>	MRLD3.5 Complete	<b>A</b>
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1

4

3

2

1