



**INSTALLATION INSTRUCTIONS**  
**for RZ22-20001 RZR Pro R / Turbo R Pull Plate**

REV A - 08/14/23

**Tools Required:**


- 21mm socket
- 21mm Open End Wrench

**COMPATIBILITY:**

**2022+ RZR Pro R**

**2022+ RZR Turbo R**

- 1) Raise the vehicle until the tires are just slightly off the ground. Make sure the vehicle is secure before moving forward with installation.**
- 2) Remove all 4 nuts and bolts that hold the stock Pull Plate to the frame. If installing on a Turbo R, you must remove the rear fascia first. TIP: There is an open slot at the bottom of the frame that will allow an open end wrench to get to the nuts on the back of the frame.**

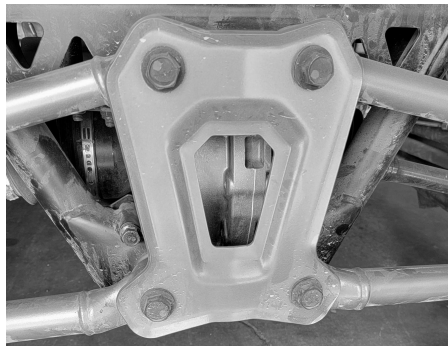

- 3) Install the new Fastlab Pull Plate by sliding a bolt through the pull plate and radius rod then into the frame. Move the tires around if you need to align it to the frame. Put a nut onto each bolt once you get it through to make sure it does not back out. For Turbo R models, transfer the upper bushing heat shield to the Fastlab Pull Plate. Torque all bolts to factory spec.**



**Don't forget to tag us with your install and action photos. Social Media Tag @fastlabutv  
or email hello@fastlabco.com**