

## DuraMAC™ - Dual Mode Duplex

Not all boosting applications require complicated boosting systems. The DuraMAC™ Boosting system is simple, versatile, sophisticated, and reliable. Quite simply, it is the world's most versatile boosting system for commercial or irrigation use.


### Features:

- Easy set-up installation
- Digital control with dual modes of operation
- Durable stainless steel and no-lead brass connections
- TEFC single phase motor for quiet operation
- Electronics separated and sealed from waterway
- Pressure gauge included
- No-Lead brass check valve included
- Designed for Lead-Lag
- Up to 120 GPM
- 20 gallon pressure tank included
- Stainless steel base
- Dry run protection
- Standard, 1 year from install warranty applies



See Pumps & Accessories Price List for Limited Warranty details.

DuraMAC™ Booster Pumps

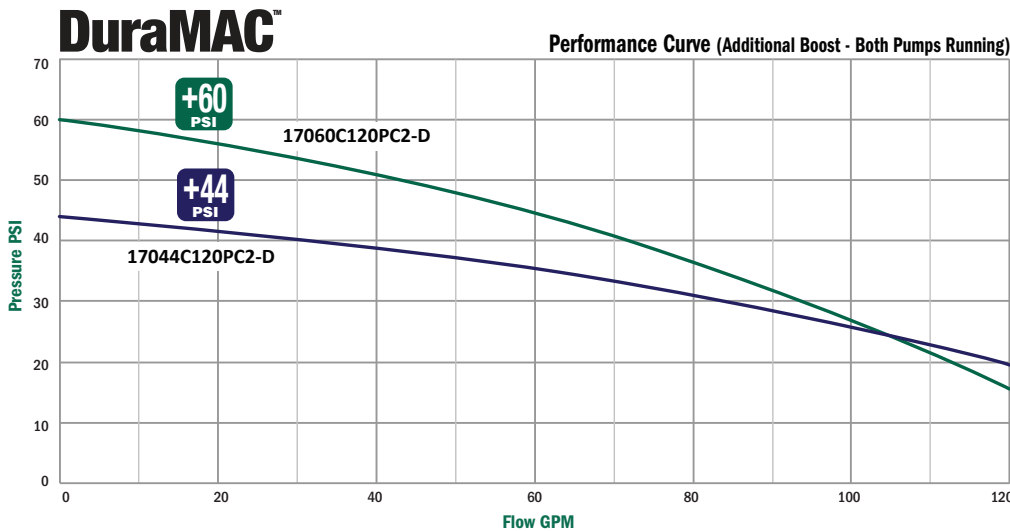

### 120 Gallon / Minute (GPM) Max

DuraMAC™ Model	Description	Pump Boost	Amps	Voltage	Power	*Pressure Reducing Valve Recommended for installation with incoming pressure greater than:	Wt.
17044C120PC2-D	230V Booster System	44 PSI	7.0	230 - 60 Hz	2 HP	36 PSI	252
17060C120PC2-D	230V Booster System	60 PSI	8.0	230 - 60 Hz	2 HP	20 PSI	252

Pressure tank required. See instruction manual for sizing information.

\*Many plumbing codes do not recommend system pressure exceeding 80 PSI. Refer to local plumbing codes for maximum boosted pressure.