




The MTNTK Performance Tunnel Cap Installation Instructions



1. Remove the seat, tail light harness guide, tail light, tail light mounting bracket, and snow flap (Remove rear bumper if shortening tunnel) Mark location that you want to cut. Measure twice and cut once. Using a circular saw, execute a smooth continuous cut across the tunnel. Use an air saw cut the remaining tunnel side material to allow the tunnel to separate.

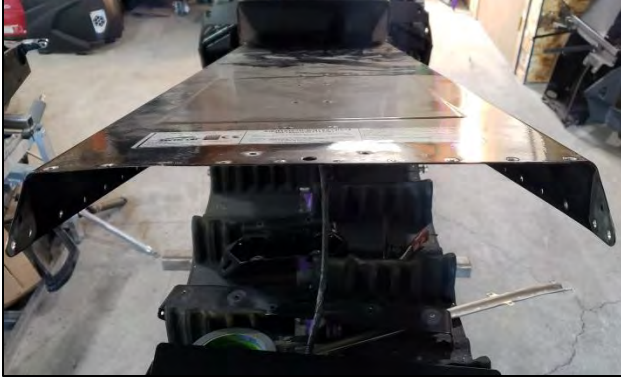

2. Install the taillight onto the top Tunnel Cap using the stock mounting bolts. Be sure to route the tail light harness through the top cap and plug harness into the tail light.



3. Slide the bottom half of the Tunnel Cap Kit into the tunnel first, then slide the top half over the bottom cap. Lay the tail light harness guide over the harness. It will need to be trimmed to fit inside the bottom tunnel cap. Once cut, install onto the bottom of the tunnel.



4. If installing the stock bumper, or aftermarket bumper, rivet it into the desired location. This kit will not use the stock snow flap. Once the bumper is installed, finish riveting the Tunnel Cap onto the sides of the tunnel and make sure Tunnel Cap is riveted to both the tunnel and the rear bumper.

MTNTKperformance.com