



EpiMax 842

CLEAR and COLOURED

Fast-Curing UV Stable Flooring Systems

Description

EpiMax 842 Fast-Curing UV Stable Flooring Systems are part of a family of two-component flooring systems built on polyaspartic chemistry. They are available in clear and coloured versions. These systems provide fast cure times translating into rapid return to service. The high film build reduces the number of coats required to provide the same overall coating thickness.

Architects and builders today seek durable and attractive floor coatings to enhance the overall building project. These EpiMax systems offer low VOC, rapid curing and long lasting durability for the end user.

They can be combined with other attractive components (vinyl chips, coloured quartz etc) resulting in highly durable and aesthetically appealing concrete floor finish systems that can be installed in just one day and also allow traffic exposure within hours of completion.

EpiMax 842 Clear is a clear seal coat.

EpiMax 842 Coloured is the coloured version.



Advantages

- UV resistant
- Fast return to service
- Meets BCA CRF Fire standard
- High film build
- Meets GBCA Low VOC standard
- Excellent gloss retention
- Low temperature application
- Good weatherability characteristics
- Convenient 1 : 1 mix ratio

Typical applications

- Fast return to service areas
- Food service areas
- Manufacturing facilities
- Commercial markets
- Educational facilities
- Commercial laundries
- Residential garages
- Laboratories
- Wash and change rooms
- Decorative flooring
- Warehousing facilities
- Animal care centres
- Healthcare facilities
- Showrooms
- Correctional facilities
- Front of house flooring
- Port & marine use
- Studios

Typical properties

- Shelf life: 12 months
- Tack free time: 30 minutes at 25°C
- Recoating window: 45 - 60 minutes at 25°C
- Cure time: 3 hours at 25°C

Surface preparation

Concrete should be at least 28 days old. Ensure it is free of all contaminants, additives, curing agents, oils, pre-existing coatings etc and is also alkaline in nature. Prepare as necessary by professional diamond grinding or captive blast cleaning as applicable to expose firmly held aggregate to CSP 2 Standard. Vacuum all dust and debris. Allow to dry if wet. Always confirm preparation adequacy.

Mixing

Mix compound and hardener for 1 minute. Note excessive mixing will reduce the pot life.

Priming over concrete substrates

Apply a prime coat of EpiMax 842 clear, diluted with 50% Thinner X to the prepared surface. Allow to harden.

Application

Solid colour flooring system


Apply a solid colour base coat to the primed concrete surface with a short nap roller at around 6m² per litre.

Allow to harden for 45 minutes.

Apply the second solid colour coat with a short nap roller at around 6m² per litre.

Allow to harden for 3 hours.

Optional: Apply a clear top coat incorporating non slip additive for traction enhancement.

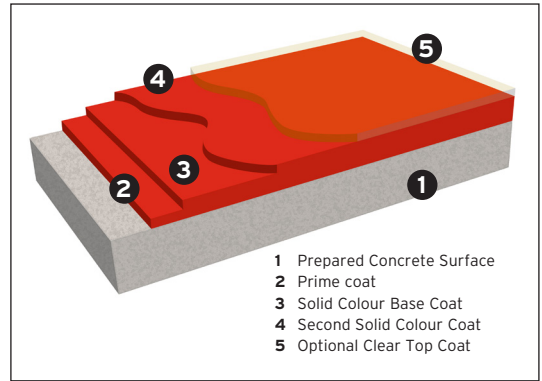

Flake flooring system

Apply a solid base coat with a short nap roller at around 5 - 6m² per litre.

Immediately broadcast selected flakes.


Allow to harden for 45 minutes.

Lightly sand or scrap the surface.

Apply the first clear top coat with a short nap roller at around 6m² per litre.

Allow to harden for 45 minutes. Apply a second clear top coat with a short nap roller at around 6m² per litre.

Allow to harden for 3 hours.

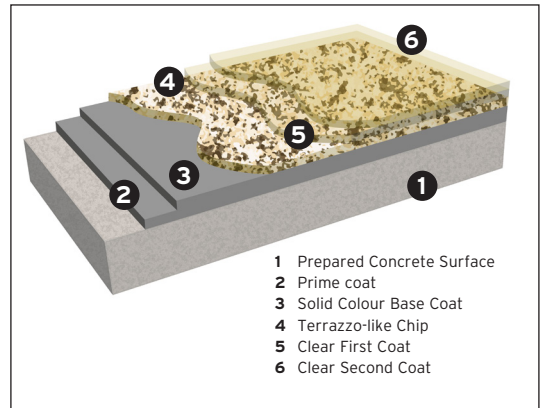

General cleaning

Housekeeping is critical in keeping floor surfaces safe. Vacuum, wash, scrub or sweep daily in accordance with recommendations. Mechanical sweepers and scrubbers can provide excellent results. Verify that the frequency and effectiveness of the cleaning process is appropriate for site conditions.

Remove spills immediately, scrub and allow the floor to dry completely.

Packaging

EpiMax 842 is available in clear or coloured 8 litre or 40 litre packs.

It is pre-packaged in correct proportions for immediate use.

Safety precautions

Read **Material Safety Data Sheet** before commencing any application. Contents are flammable. Keep away from children. Avoid contact with skin and avoid breathing vapour. Always provide adequate personal protection (gloves & goggles etc) during use. Always provide adequate ventilation, especially in confined spaces. If poisoning occurs, call Doctor or Poisons Information Centre. Phone 13 11 26. If swallowed, DO NOT induce vomiting. Give plenty of water or milk. If skin contact occurs, quickly remove contaminated clothing and wash affected areas thoroughly with soap and water.

TDG Code: Hardener - Not Classified Compound - Not Classified.