

UD515DS-1

Family	Professional dishwasher
Subfamily	Undercounter Dishwasher
Basket dimensions	500x500 mm
Power connection	400 V 3N~ / 12 A / 7,3 kW / 50 Hz
Dual heating	Yes
Width	600 mm
Depth	600 mm
Height	820 mm
Depth with open door	1020 mm
Usable load height	415 mm



Target

Solutions	Coffee shops/Wine bars; Hotels; Offices; QSR
-----------	-------------------------------------------------

Aesthetics

Serie	Easyline	Led color	Green
Control panel	electronic		

Functions



Functionality	GN 1/1 trays washing; Triple filter; HTR; Door clearance 415mm
---------------	----------------------------------------------------------------------

Programs

Programs

Boiler 85°C/Tank 60°C - 60"	Boiler 71°C/Tank 60°C - 1'20"	Boiler 85°C/Tank 60°C - 1'10"
Boiler 85°C/Tank 60°C - 1'30"	Boiler 85°C/Tank 60°C - 3'	Boiler 71°C/Tank 60°C - 2'10"
Boiler 85°C/Tank 60°C - 4'10"		

Drain and self cleaning cycle	Yes
Maximum basket/hour	60
Maximum dishes/hour	1080

Interface

Panel	Easyline	Rinse aid missing alert	Yes
Display	8 digit	Detergent missing alert	Yes
Number of buttons	5	Cycle progress alert	Yes
On/Off button	Yes	End-cycle alert	Yes
Salt alert	Yes	Manual diagnostic	Yes

Construction

Tank	Deep drawn	Door gasket	On 3 sides
Tank construction	Double wall	Rack guides	Embossed
Tank material	Stainless steel AISI 304	Tank capacity	11 l
Back panel	Galvanized	Boiler capacity	6 l
Door	Double wall	Noise	Lpa 56,5 dBA
Balanced door	Yes	Protection class	IPX4
Tank filter	Stainless steel	Net weight	64,000 kg
Washing spray arm	2 in stainless steel	Adjustable feet	15 mm
Rinse spray arm	2 in stainless steel	Drain max. height	600 mm

Consumption and connections

Tank heating element	2000 W	Water cycle consumption	3,2 l
Boiler heating element	6100 W	Warm water connection	Cold 15°C
Washing pump	700 W	Max temperature inlet water	60°C
Default connection	7300 W	Max water hardness	54°fH - 30°dH
Optional electrical connection	230 V 3~ / 21 A / 7,3 kW / 50 Hz; 230 V~ / 15 A / 3,4 kW / 50 Hz (NC); 230 V~ / 20 A / 4,5 kW / 50 Hz (NC); 230 V~ / 22 A / 5,0 kW / 50 Hz	Inlet pressure	100-600 kPa

Electrical Connection

Plug	Not present
------	-------------

Manuals and Certifications


Certificate	CE, Belgaqua
-------------	--------------

Equipments

Peristaltic detergent doser	Electronic control	Default chemicals dosing unit of measure	gr/lt
Detergent (red) hose length	2,2m	Drain pump with 3 stage filter system	Yes
Automatic incorporated softener	Yes	Rinse pump H.T.R. system	Yes
Peristaltic rinse-aid doser	Electronic control	Break tank	Yes
Detergent load	1,5 l/h	Partial renewal of water in the tank and built-in drain pump	Yes
Rinse aid (blue) hose length	2,2m	Water supply pipe diameter	DN15 - ½"
Soft Start	Yes	Drain supply pipe diameter	DN20-G 3/4"
Boiler thermostop	Yes default ON	Automatic start	Yes, default OFF
Tank thermostop	Yes	Chemicals level probe	Yes, optional KITSONLIV
Cycle counter	Yes	Trays washing option GN1/1 530x325mm	Yes

Accessories Included

Dish basket	1x PB50D01	Water supply hose	Yes - 2m
Cutlery basket	1x PHOOS02	Drain hose	Yes - 2m
Flat basket	1x PB50G02		

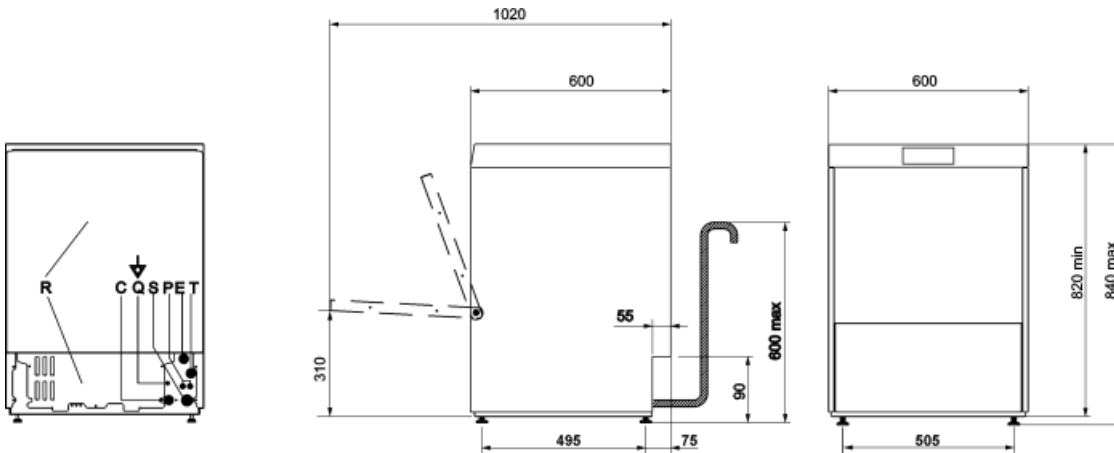

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

Not included accessories



WH00C01

Wire insert for cups

WB50PG5

Wire basket for no. 25 plastic glasses with flat bottom, 500x500x260 mm

KITSONLIV

Probe level kit for double wall models

WH00S01

Wire insert for 12 small dishes




PHOOS01

Polypropylene single basket for cutlery

WB50T02

Wire basket for 7 trays GN1/1 h 20 mm, 500x500 mm




WB50G01

Universal wire basket with flat bottom, 500x500x123 mm

PB50D01

Polypylene basket for 18 plates, 500x500x105 mm



WB50G02

Wire basket for 90 mm diameter max glasses with sloped bottom, 500x500x170 mm

KITDETKCC500

Kit for detergent (1l) and rinse aid (1l) storage for dishwashers and glasswashers 500 double wall



PB50G01

Universal polypropylene basket, 500x500x100 mm

WB50G04

Wire basket for glasses 135 mm diameter max, with sloped bottom, 500x500x170 mm



PHOOS02

6 compartments polypropylene basket for cutlery

WB50G03

Wire basket for 72 mm diameter glasses with inclined bottom, 500x500x235 mm



WS5

Underframe for glasswashers 500mm



Symbols glossary (TT)



SUITABLE FOR GASTRONORM TRAY



HTR RINSING SYSTEM



PARTIAL DRAIN SYSTEM+



MAX. USABLE HEIGHT 415mm