



RHYNALOX/RHYNODRY PLUS

MARKETS



Automotive



Marine & Comp



Other Markets

FORMS



Sheets

TYPE



DRY

FEATURES

High Flexibility



High initial cutting action



Uniformity of scratch pattern



High strength resin bond



Clog resistant coating



BENEFITS

Adaptable to curves & contoured Surfaces

Rapid stock removal

Optimum substrate preparation

Minimal grit shedding

Long lasting sanding

APPLICATION SUGGESTIONS


Heavy Duty Sanding

Sanding / Preparation

Fine Sanding

Sanding for Blending

Micro-finishing / Rectifying

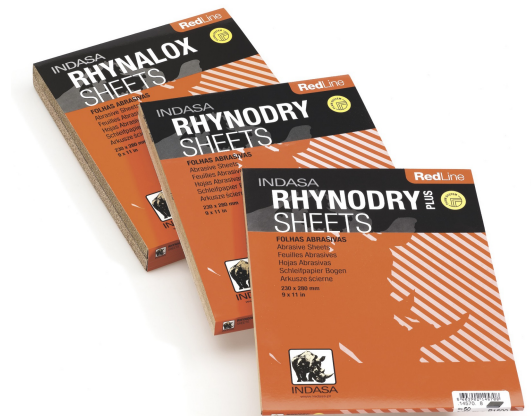

SUBSTRACTS

Old paint
 Fillers
 Primers
 Top Coats
 Clear Coats
 Fibre Glass
 Gel Coat
 Metal
 Hard Metal



RHYNALOX/RHYNODRY PLUS

FASTENING SYSTEM / BACKING PAD



PRODUCT SPECIFICATIONS

Lubricant Coating	[Visual representation of lubricant coating distribution across grits]															
Grit	40	60	80	100	120	150	180	220	240	320	400	600	800	1000	1200	1500
Backing	D wt Paper					B wt Latex Paper										
Abrasive	Aluminium Oxide															
Bonding	Modified Synthetic Resins															