




MCU211-UDD-865

Precision's durable all stainless steel GN1/1 counters have been designed to provide commercial caterers with reliable, energy and cost efficient refrigerated storage solutions when space is at a premium. Proudly made in the UK, these counters are capable of meeting the highest demands of commercial kitchens all around the world.

When space is at a premium, and preparation workspace is required, a Precision refrigerated counter provides a practical, flexible and cost effective solution.

Key Features:


- Stainless Steel Interior & Exterior
- Front Breathing & Venting Refrigeration System Designed To Operate In 43°C Ambient
- GN 1/1 Shelving System
- Anti-Drip Worktop
- Built-In Air Duct For Even Temperature Distribution
- R290 Hydrocarbon Refrigerant
- Zero ODP Injected Polyurethane Insulation - 60mm
- 2 / +4°C Refrigerator Temperature Range
- Electronic Controller With Easy Read LCD Screen
- Hot Gas Defrost
- Door / Drawer Locks Fitted As Standard
- Rifle Bore Coated Evaporators
- Integrated Flush Door Handle
- Hi / Lo Audio Visual Temperature Alarms
- Condensing Unit Safety System To Protect Compressor From Blocked Condensers
- Self Closing Doors
- Heavy Duty Brake & Swivel Castors
- Waste Heat Recovery Condensate Vaporiser System

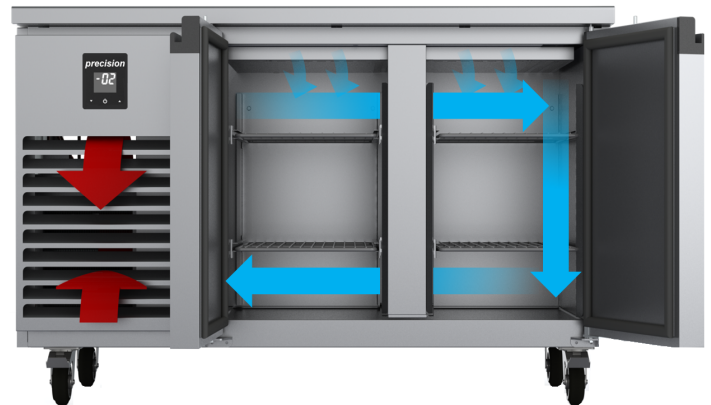

Front Breathing & Venting Refrigeration System - No side/rear/top/ bottom ventilation required - Perfect For Plinth Mount Applications

Options:

- Bank of 2 Drawers - H - (200/200mm Depth)
- Bank of 3 Drawers - T - (100/130/130mm Depth)
- Remote Units - R (Width reduces by 120mm)
- Raised Pan Grid - PG / Countertop Pan Wells
- Biscuit Worktop - Lowers Height By 20mm
- Low Profile Castors - Lowers Height By 17mm
- Levelling Feet (Plinth) - Lowers Height By 106mm
- Adjustable Legs - Increases Height to 910mm Max
- ST/ST Back / Splashback
- Right Hand Condensing Unit
- Extra Shelves / Slides
- Precision Connect

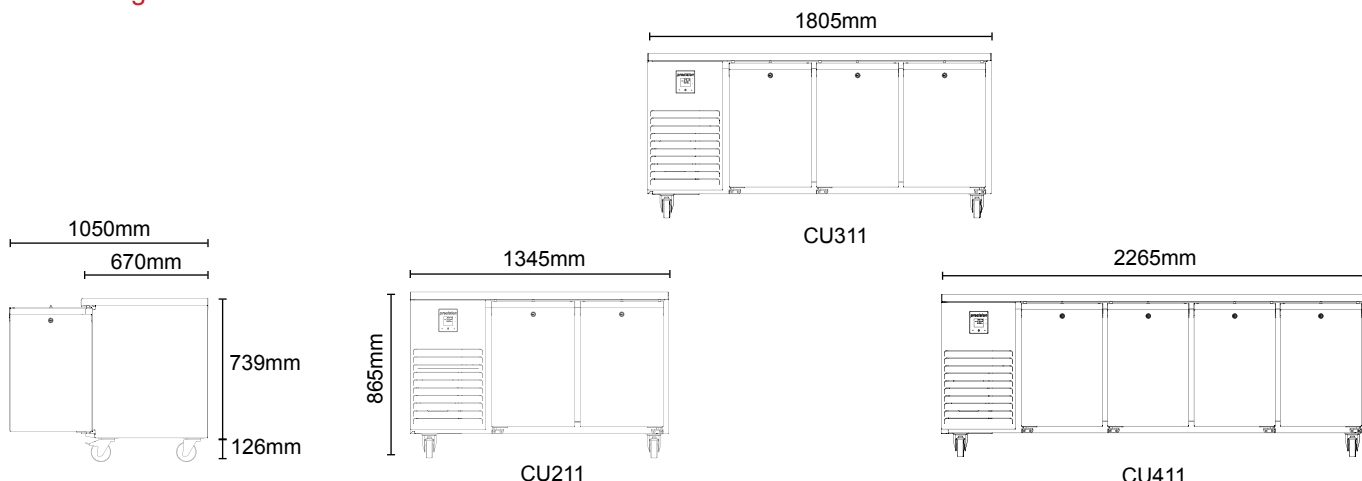

Model	MCU211	LCU211	MCU311	LCU311	MCU411
Type	Refrigerator	Freezer	Refrigerator	Freezer	Refrigerator
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	GN1/1	GN1/1	GN1/1	GN1/1	GN1/1
Number of Shelves	4	4	6	6	8
Max Number of Shelves (100mm Spacing)	10	10	15	15	20
Temperature Range	-2 / +4°C	-18 / -22°C	-2 / +4°C	-18 / -22°C	-2 / +4°C
Exterior WxDxH (mm)	1345x670x865	1345x670x865	1805x670x865	1805x670x865	2265x670x865
Net Usable Volume (litres)	162	162	243	243	330
Weight (KG)	115	120	145	150	185
Refrigerant / GWP	R290 /3	R290 /3	R290 /3	R290 /3	R290 /3
Refrigeration Watts (+45°C Condensing)	373	495	373	495	373
Evaporating Temp	-10°C	-30°C	-10°C	-30°C	-10°C
Heat Rejection Watts*	609	992	609	1028	634
Noise Output (dBa)	62	63	62	63	62
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	1.4	3.0	1.5	3.4	1.5
Total Electrical Load - kW	0.32	0.69	0.35	0.78	0.35
Energy Consumption / 24hrs - kWh**	1.25	4.73	2.55	7.53	3.19
Energy Consumption / Year (AEC) - kWh**	456	1726	931	2748	1164
Energy Efficiency Class**	A	D	C	D	C

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

** Tested to BS EN ISO 22041

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet