





OG8401/P - Lincat Opus 800 Propane Gas Countertop Chargrill - W 600 mm - 12.6 kW Embrace the unique power and versatility of the Opus 800 Three-Zone Gas Chargrill, which provides three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks.

- Three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks. Individual zones can be turned off during quiet periods.
- Highly powerful infra-red burners respond quicker and heat faster than standard burners allowing you to increase your output and achieve energy savings
- Heavy-duty cast iron branding grids with reversible design, for uninterrupted cooking and self cleaning at maximum power

- Flame failure protection
- Heavy duty radiant caps protect burners

Specifications

Opcomoduons				
Summary		Power and Performance		
Brand	Lincat	BTU per Hour	42,991	
Range	Opus 800	Total Power kW	12.6	
Power Type	Gas	Cooking Area (Width x Depth) mm	500 x 620	
Gas Type	Propane Gas	Temperature Control	Mechanical	
Unit Type	Counter-top			
Available in UK Only	No			
UK Warranty	2 Years Parts and Labour Warranty			
Export Warranty	Contact your local dealer			
GTIN	5056105102823			
Key Specifications		Capacity		
Number of Heat Zones	3	Product Output per Hour	78 x 225g[8oz]steaks[chilled]	
Weights and Dimensions		Supply Connections		
Unit Height (External) mm	653	Requires Installation	Yes	

Unit Height (External) mm 653 Requires Installation Yes Unit Width (External) mm **Requires Electrical Supply** 600 No Unit Depth (External) mm **Gas Connection BSP** 806 1/2" Gas Consumption at full rate Net Weight Kg 80.5 0.9 Propane m³ per Hour Gas Pressure Propane mbar 37 Total heat input at full rate Propane 12.6 Total heat input at full rate Propane 42,911 BTU per hour

	Sni	p	pι	ın	9
--	-----	---	----	----	---

92
79
70
85





Available Accessories

CH01 Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU


CH02 Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU


OA8950 Lincat Opus 800 Free-standing Floor Stand with Legs - for units W 600 mm


OA8950/C Lincat Opus 800 Free-standing Floor Stand with Castors - for units W 600 mm

RC03M RADIANT COVER - OPUS 800 - UNDER DEVELOPMENT

Technical Picture





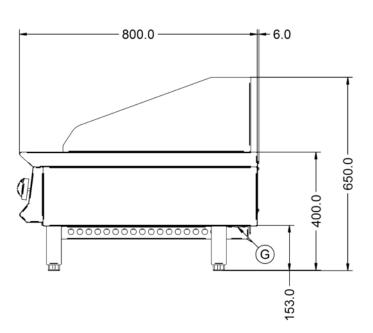







Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Office Mingeoffi

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm

Product Code: 0G8401/P Page Number: 3 Print Date: 19/08/2020