



SS300

SS150

Key Features:

Stainless Steel Interior & Exterior

Designed To Operate In 43°C Ambient

Front Breathing & Venting Refrigeration System

GN 1/1 Shelving System

R290 Hydrocarbon Refrigerant

Zero ODP Injected Polyurethane Insulation - 40mm

+1 / 4°C Refrigerator Temperature Range

Electronic Controller With Easy Read LCD Screen

Hot Gas Defrost

Door Locks Fitted As Standard

Rifle Bore Coated Evaporators

Integrated Flush Door Handle

Gastronorm Shelving System - Anti Tilt Slides

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect Compressor From Blocked Condensers

Self Closing Doors

Adjustable Levelling Feet At Front

Rollers At Rear For Easy Positioning

Waste Heat Recovery Condensate Vaporiser System

Proudly made in the UK, Precision's versatile all stainless steel space savers are perfect for space optimisation in commercial kitchens all around the world. This range of space saver counters and under counters offer high performance storage solutions in even the smallest of kitchens.

For example, our HSS 300 offers the same internal storage capacity as a traditional two door GN1/1 counter but with a 28% smaller footprint.



UC150

Options:

Bank of 2 Drawers (150mm Depth, H only)

Bank of 2 Wide Drawers (150mm Depth, H only) - SS300

Countertop Pan Well - HSS300 - 4 x GN1/3 (150mm)

Insulated Hinged Lid For Countertop Pan Well

Castors - Increases Height by 62mm


Stainless Steel Back

Extra Std Nylon Coated Shelves / Slides - GN1/1

Stainless Steel Shelves / Slides - GN1/1

Left Hand Hinged Door (UC150 & SS150)

Precision Connect

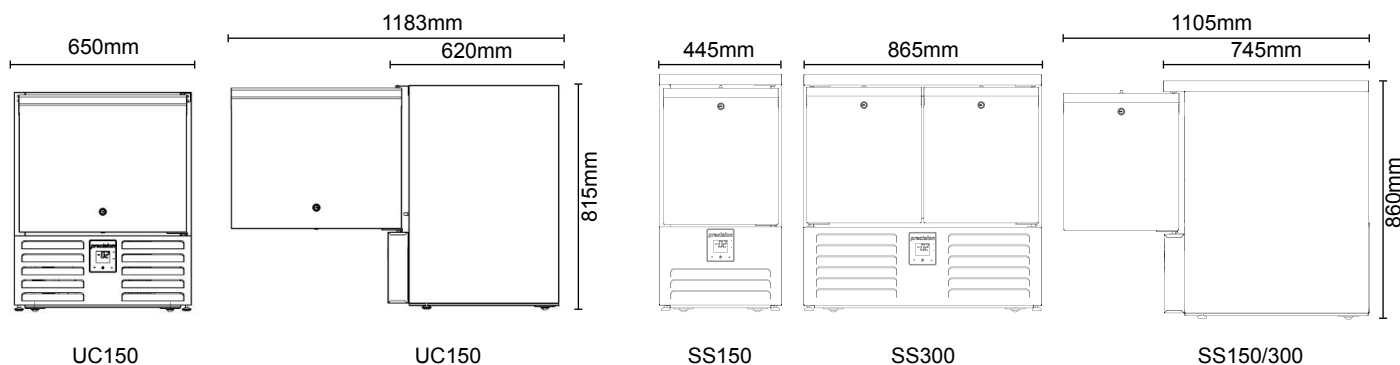

Model	HUC150	LUC150	HSS150	LSS150	HSS300	LSS300
Type	Refrigerator	Freezer	Refrigerator	Freezer	Refrigerator	Freezer
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	GN1/1	GN1/1	GN1/1	GN1/1	GN1/1	GN1/1
Number of Shelves	2	2	2	2	4	4
Max Number of Shelves (100mm Spacing)	4	4	4	4	8	8
Temperature Range	+1 / 4°C	-18 / -22°C	+1 / 4°C	-18 / -22°C	+1 / 4°C	-18 / -22°C
Exterior WxDxH (mm)	650x620x815	650x620x815	445x745x860	445x745x860	865x745x860	865x745x860
Net Usable Volume (litres)	62	62	48	48	96	96
Weight (KG)	65	70	65	70	80	85
Refrigerant / GWP	R290 /3	R290 /3	R290 /3	R290 /3	R290 /3	R290 /3
Refrigeration Watts (+45°C Condensing)	373	208	373	208	373	495
Evaporating Temp	-10°C	-30°C	-10°C	-30°C	-10°C	-30°C
Heat Rejection Watts*	601	410	563	401	605	921
Noise Output (dBa)	60	59	58	58	67	68
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	1.4	1.5	1.4	1.5	1.5	2.7
Total Electrical Load - kW	0.32	0.35	0.32	0.35	0.35	0.62
Energy Consumption / 24hrs - kWh**	1.06	5.48	0.77	4.41	1.31	4.66
Energy Consumption / Year (AEC) - kWh**	387	2000	281	1609	478	1701
Energy Efficiency Class**	A	D	A+	D	A	D

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

** Tested to BS EN ISO 22041

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet