


# ELECTRONIC CRANE SCALE

## FEATURES

- Precision Die Cast Aluminum Alloy Case.
- Integrated Load Cell Design
- High Strength Load Components
- American Standard Moveable Rings
- Fully Sealed, Maintenance - Rechargeable Battery
- Continues Working Time >100h
- Remote Control

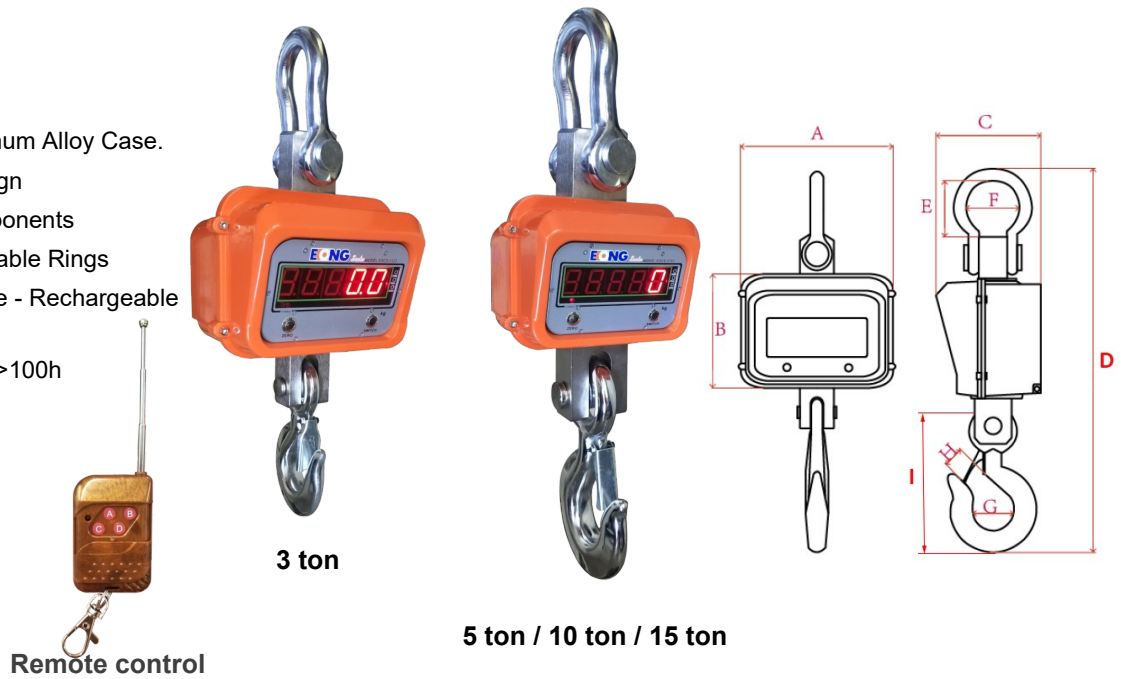

Dimension Scale (mm)									
TYPE	A	B	C	D	E	F	G	H	I
3 ton	255	190	205	580	70	67	46	35	200
5 ton	255	190	205	680	88	73	60	45	250
10 ton	255	190	205	780	114	92	71	59	300
15 ton	255	190	205	830	120	97	77	65	340

## SPECIFICATIONS

Art No.	ESCS-3122-3T	ESCS-3122-5T	ESCS-3122-10T	ESCS-3122-15T
Item No.	01ES-D-CR007	01ES-D-CR008	01ES-D-CR009	01ES-D-CR012
Capacity	3T x 1Kg	5T x 2Kg	10T x 5Kg	15T x 5Kg
Display	5 Digits, Height 30mm, LED Display			
Tare Range	100% F.S			
Stable Time	5 - 8s			
Safe Overload	120% F.S			
Ultra Overload	500% F.S			
Overload	100% F.S			
Zero Range	4% F.S			
Operating Temperature	0°C ~ 40°C			
Power Source	Rechargeable 6V/4Ah Battery			