



Ahead of the Curve®



Stealthbox®

INSTALLATION GUIDE
for the

SB-D-QDRAMD/10TW1

SKU# 94610

2002-Up Dodge Ram 1500 Quad Cab, 2003-Up Dodge Ram 2500 &
3500 Quad Cab, & 2009-Up Dodge Ram Crew Cab

Enclosure Type: Sealed

Driver Type: 10TW1-4

Nominal Impedance: 2 ohms

Continuous Power Handling: 600 watts (RMS method)

! IMPORTANT

If you choose to perform the installation yourself, it is absolutely vital that the Stealthbox® be properly mounted to the vehicle according to these instructions. Failure to mount the enclosure properly presents two problems:

- 1) The sub-bass performance will suffer due to the movement of the enclosure caused by the force exerted by the woofer(s).
- 2) A loose enclosure presents a serious safety hazard in the event of a collision or sudden deceleration.

INSTALLATION
DIFFICULTY:

1 OUT OF 5

ESTIMATED TIME:
1 HOUR



Thank you for choosing a JL Audio Stealthbox® for your automotive sound system. With proper installation, your new vehicle-specific enclosed subwoofer system will deliver years of listening pleasure.

We strongly recommend that you have your new Stealthbox® installed by your authorized JL Audio dealer. The installation professionals employed by your dealer have the necessary tools and experience to disassemble and reassemble your vehicle properly. If you prefer to perform your own installation, please read this installation guide completely before beginning the process.


INCLUDED HARDWARE



BOM ID	Qty	SKU	Description
1	1	150737	Driver Side Bracket
2	1	150736	Passenger Side Bracket
3	2	151095	3/8" Flat Washer
4	2	151081	3/8" Lock Washer
5	2	151079	3/8-16 x 1-1/4" Hex Bolt

POWER RECOMMENDATION

JL Audio recommends high quality amplifiers such as the JL Audio XD600/1v2. The diagram below shows the recommended crossover settings for the XD600/1v2. For a detailed description of the amplifier settings, consult the owner's manual for the amplifier. If another amplifier is being used, please reference this illustration and use similar settings on that amplifier.

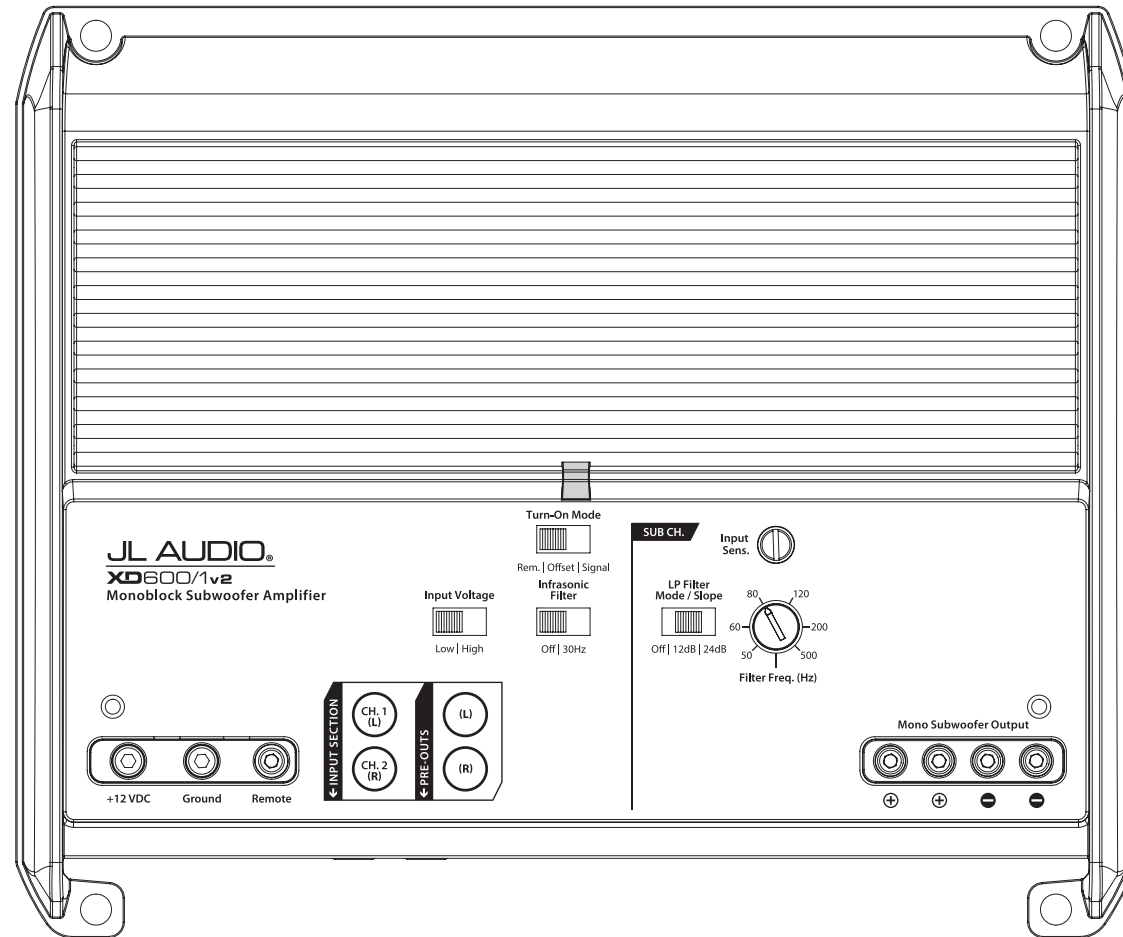


CONNECTIONS

Using quality power, signal, and speaker wire is essential in ensuring the performance of your Stealthbox®. JL Audio recommends using a 4 AWG power kit such as the XD-PCS4-1B for your Stealthbox® amplifier. Other kits are available should you be using more than one amplifier. Signal wire such as the JL Audio Premium Audio Interconnect Cables should be used to provide signal for both channels of the amplifier. JL Audio recommends using 12AWG speaker wire for subwoofers such as our XC-BCS12-25.




STEP 1

Empty out the rear seat area of the vehicle. Fold the rear seats and cargo tray up.

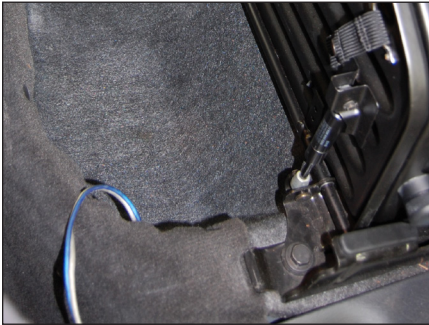

STEP 2

Route speaker cable from the amplifier to the driver's side of the storage area as shown.

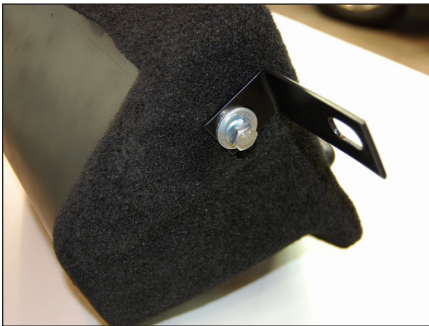

STEP 3

Secure the Driver's Side Bracket to the driver's side of the enclosure using a 3/8 - 16 x 1-1/4" Hex Bolt, 3/8" Lock Washer, and 3/8" Flat Washer. Hand tighten.

Repeat for the passenger side using the Passenger Side Bracket.

Both brackets should be angled toward the rear of the enclosure.



STEP 4

Remove the two rear seat bracket bolts.



STEP 5

Connect the speaker cable to the terminal cup on the front of the Stealthbox®, and drop the enclosure into position.



STEP 6

Align the holes in both brackets with the factory seat bracket holes. Reinstall the two factory seat bracket bolts, and hand tighten.



STEP 7

Firmly tighten the two 3/8 - 16 x 1-1/4" Hex Bolts, then firmly tighten the two factory seat bracket bolts.



STEP 8

Fold the cargo tray and rear seat back down.

CONGRATULATIONS!

You have completed the installation for this model! Enjoy your new Stealthbox®!



MID/HIGH FREQUENCY DRIVER FITMENT

A variety of JL Audio coaxial and component systems will fit in the factory speaker locations of your vehicle.

Front Speaker Size / Location: 6 x 9" - Front Doors
Fits JL Audio Models: TR690-TXi, C2-690tw

Rear Speaker Size / Location: 5-1/4" - Rear Door
Fits JL Audio Models: TR525-CXi, C2-525x, C2-525, C3-525,
C5-525x, C5-525, & ZR525-CXi



JL AUDIO® | How we play.™    

(954) 443-1100

www.jlaudio.com

All specifications are subject to change without notice. "JL Audio" and the JL Audio logo, and "Stealthbox" and the Stealthbox logo are registered trademarks of JL Audio, Inc. "Ahead of the Curve", its respective logo, and "How we play" are trademarks of JL Audio, Inc.
Printed in USA • ©2016 JL Audio, Inc. • For more detailed information please visit us online at www.jlaudio.com.

JLA-SKU# 011389 • ver. 09.16.2016 • 10369 NORTH COMMERCE PARKWAY • MIRAMAR, FLORIDA • 33025 • USA