



Stealthbox®

INSTALLATION GUIDE for the

SBA-J-JKU-UAR

SKU# 99841 2007-2017 Jeep Wrangler (JK)

Universal Amplifier Rack

IMPORTANT

If you choose to perform the installation yourself, it is absolutely vital that the Stealthbox^{*} be properly mounted to the vehicle according to these instructions. Failure to mount the enclosure properly presents two problems:

- 1) The sub-bass performance will suffer due to the movement of the enclosure caused by the force exerted by the woofer(s).
- 2) A loose enclosure presents a serious safety hazard in the event of a collision or sudden deceleration.






Thank you for choosing a JL Audio Stealthbox[®] for your automotive sound system. With proper installation, your new vehicle-specific enclosed subwoofer system will deliver years of listening pleasure.


We strongly recommend that you have your new Stealthbox[®] installed by your authorized JL Audio dealer. The installation professionals employed by your dealer have the necessary tools and experience to disassemble and reassemble your vehicle properly. If you prefer to perform your own installation, please read this installation guide completely before beginning the process.

INCLUDED HARDWARE

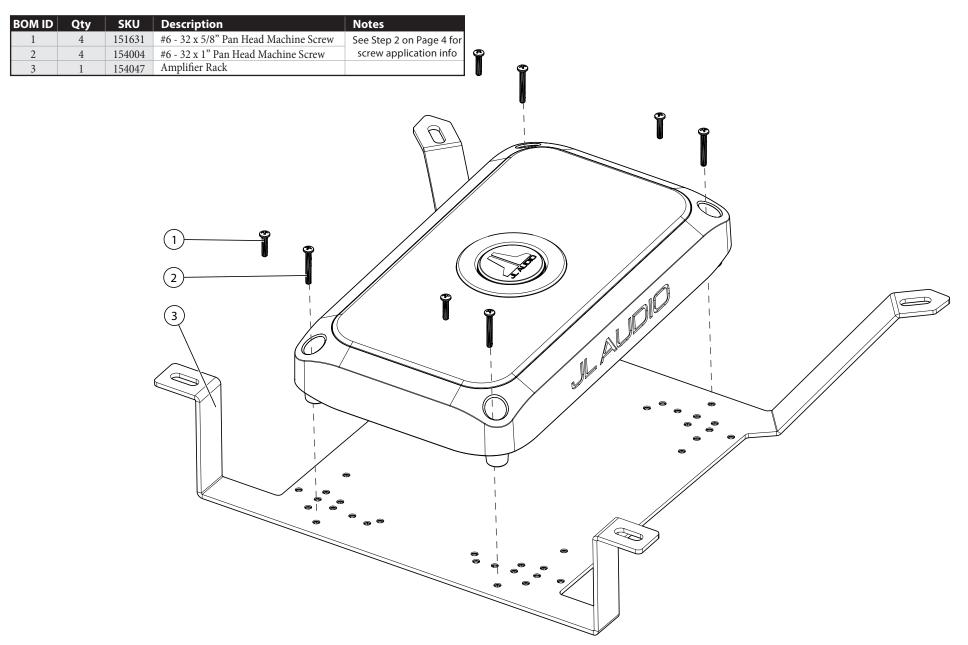

AMPLIFIER MOUNTING TEMPLATE

The SBA-J-JKU-UAR Amplifier Rack is designed to accommodate several different JL Audio amplifier models (sold separately). JL Audio recommends mounting the amplifier(s) with the wiring exiting toward the center console of the vehicle. Use the illustration and table below to determine which mounting holes to use:

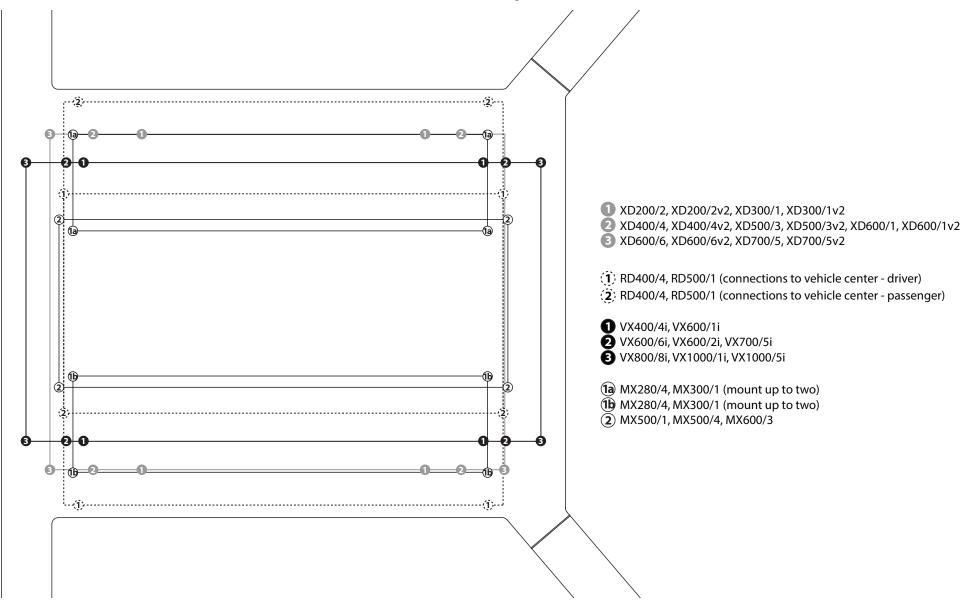



STEP 1

NOTE: The installation procedure in this manual shows a VXi amplifier being installed with the seat removed from the vehicle for illustrative purposes only. It is not necessary to remove the seat and may be easier to install and wire the amplifier inside the vehicle.

Reference the illustration on **Page 3** to determine the required mounting holes for the amplifier being installed.

STEP 2

Align the amplifier to the Amplifier Rack with the connections oriented toward the center console side (excluding MX models). Secure the amplifier using four machine screws as indicated below:


• #6 - 32 x 1" : For VXi models • #6 - 32 x 5/8" : For XD, XDv2, RD, and MX models

STEP 3

NOTE: The following steps illustrate the Amplifier Rack installation for the passenger side. The installation procedure for the driver side will be the same.

Remove the four seat bolts.





STEP 7

STEP 6

Route the amplifier cables to the underseat location.


With the larger, angled legs positioned at the

Amplifier Rack to the four factory studs. Secure

the Amplifier Rack to the seat bracket using the

four factory nuts removed in the previous step.

front of the seat, align the four slots on the



STEP 4

Remove the seatbelt bolt from the side of the seat. If removing the seat from the vehicle, disconnect the airbag harness from under the seat.

STEP 8

Connect the amplifier wiring to the amplifier. Reconnect the airbag harness, if removed, and reinstall the seatbelt bolt. Carefully lower the seat into position.



Page 4 • JL Audio, Inc., 2020



STEP 9

Reinstall the four seat bolts.



CONGRATULATIONS!

You have completed the installation for this model! Enjoy your new Stealthbox® Accessory!



(954) 443-1100

www.jlaudio.com

All specifications are subject to change without notice. "JL Audio" and "How we play" are registered trademarks of JL Audio, Inc. "Ahead of the Curve" and its respective logo are trademarks of JL Audio, Inc.

Printed in USA • ©2020 JL Audio, Inc. • For more detailed information please visit us online at www.jlaudio.com.

JLA-SKU# 011553 • ver. 02.26.2020 • 10369 NORTH COMMERCE PARKWAY • MIRAMAR, FLORIDA • 33025 • USA

