



EDGY

ASSEMBLY INSTRUCTIONS

REQUIRED TOOLS


2 pcs. 13 mm wrench (10 mm for wheels). We recommend that assembly takes place on a flat surface.

ASSEMBLY OF BOTTOM PLATE AND WHEELS

For easiest assembly, mount the base plate one section at a time. Place the bolt heads downwards on the base plate, to act as a feet.

If you have wheels, it is best to mount them before attaching the base plate.

Use M6 bolts and nuts to mount the wheels.

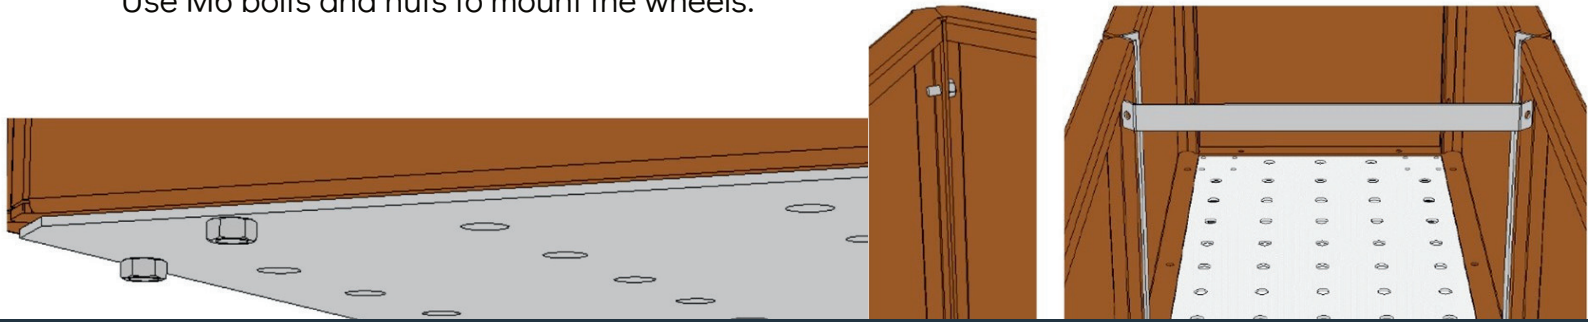

BOLTS, NUTS, JOINING PLATE AND CROSSBRACE

If you purchase an additional bottom plate, or a bottom plate with wheels, extra bolts and nuts are included.

It is possible to purchase additional side plates, which can extend the planter.

We have a large selection that fits all standard planters (40 and 80 cm height).

With the purchase of side plates, extra bolts, nuts, and cross braces are included.

MAINTENANCE AND PATINATION

Initially corten steel may stain the base slightly. Depending on the weather, the patination will continue for several months. After this, the staining will only minimally transfer.

After assembly, we recommend washing all visible surfaces with soapy water to remove manufacturing oil and ensure a uniform patination.

The cut edges on the galvanized plates will develop some corrosion over time. This is intended by design and has no impact on durability.

