


Q-View Wall mount for The Sonos Arc Soundbar

Guidelines


- Use the **Q-View** wall mount kit.
- Keep 4.0" (102 mm) space (minimum) between Sonos Arc and your TV.
- For best sound quality, keep both ends of Arc at least 1' (30cm) from a wall or other obstruction.

Mount kit contents

- Wall mount bracket
- 2 knobs
- 6 x 6mm wall plugs
- 6 x self-tapping screws

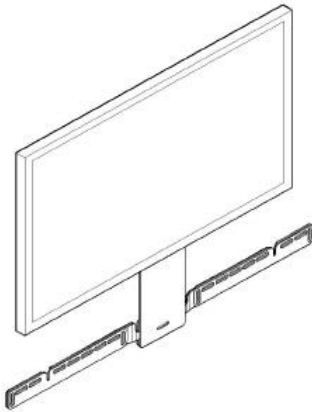


1. Make sure there is at least 5.5" (140 mm) between the top of the wall mount bracket and the TV.

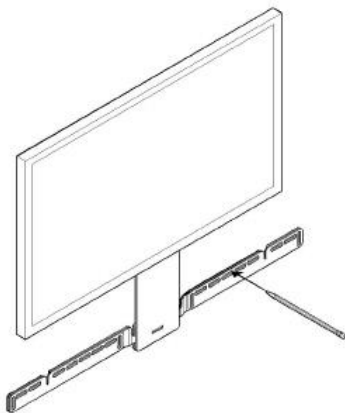


- 2.
- 3.


4. Position the wall mount against the wall making sure the bracket is level. Mark the screw locations.

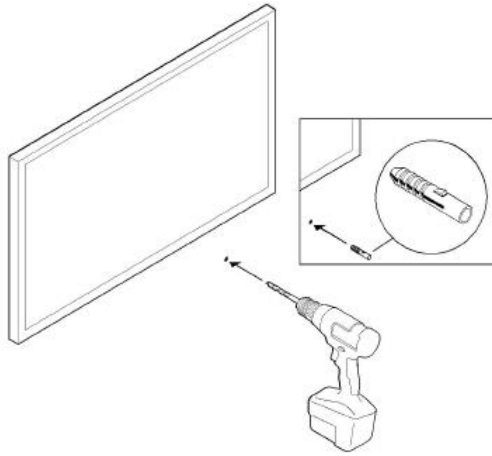

- 5.
6. If you're using the included wall anchors, use a 6mm drill bit to drill the pilot holes and then insert the wall anchors. Don't use the anchors if you're drilling into wood or plastic.

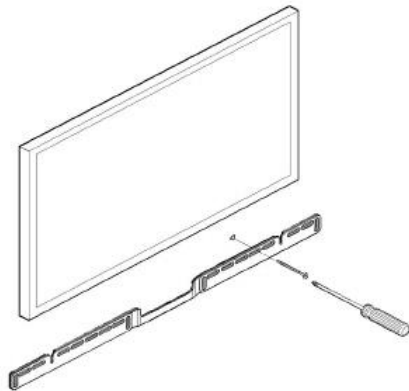

- 7.
- 8.
9. Position the wall mount bracket over the marked screw locations, using a level to confirm accuracy. Put the washer on the screw and use a Phillips-head screwdriver or a power drill to screw the bracket to the wall.

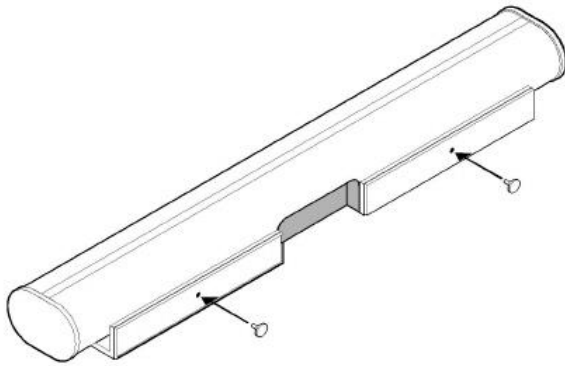


10. Screw the 2 knobs into the back of the soundbar, do not fully tightened.



11.

12.

13. Connect the power and HDMI cables to the back of the soundbar.

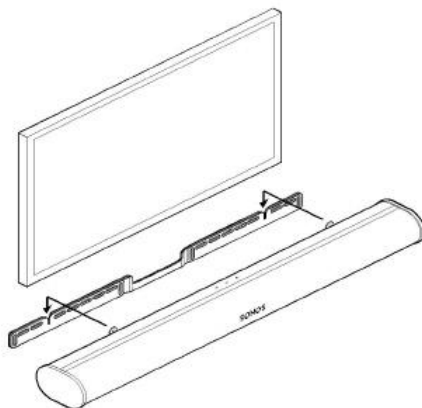

14.

15.

16. Position the soundbar down onto the bracket so the knobs fit into the slots and tighten to fit tight.

Enjoy your new Sonos Arc Soundbar!

Show people dancing in room.