


# 12" x 36" Gearhead Metal Lathe

## Product Features:

- Powerful 1.5 HP motor
- Safety guard with limit switch protection
- Line interruption switch system needs a restart after a power failure
- Guideway and gears in headstock are all hardened and precision ground
- Comes complete with 6"-3 jaw chuck, 8"-4 jaw chuck, imperial and metric gears, quick change tool post, steady rest, follow rest, 10" DI-4 camlock face plate, thread chasing dial indicator, MT#3 dead center, MT#3 arbor taper, 1/2" drill chuck, full length splash guard, tool box, chuck keys and hex. keys

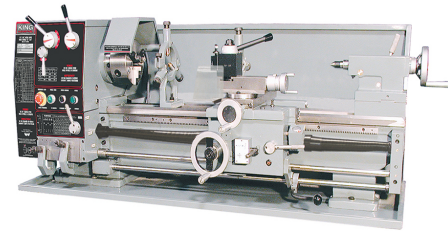

|  |                                      |
|--|--------------------------------------|
| <b>MODEL</b>                                 | <b>KC-1236ML</b>                     |
| <b>DISTANCE BETWEEN CENTRES</b>              | <b>36"</b>                           |
| <b>SWING OVER BED</b>                        | <b>12"</b>                           |
| <b>SPINDLE BORE</b>                          | <b>1-1/2"</b>                        |
| <b>SWING OVER CROSS SLIDE</b>                | <b>7-1/4"</b>                        |
| <b>TAPER IN HEADSTOCK</b>                    | <b>MT #5</b>                         |
| <b>TAPER IN TAILSTOCK</b>                    | <b>MT#3</b>                          |
| <b>WIDTH OF BEDWAYS</b>                      | <b>7-1/4"</b>                        |
| <b>TOTAL TRAVEL OF CROSS SLIDE</b>           | <b>6-3/8"</b>                        |
| <b>TOTAL TRAVEL OF TOP SLIDE</b>             | <b>3-3/8"</b>                        |
| <b>SPINDLE SPEEDS</b>                        | <b>9 (60-1,500) RPM</b>              |
| <b>THREAD CUTTING RANGE</b>                  | <b>40 (4-112 TPI) 30 (.2-4.5 mm)</b> |
| <b>MOTOR</b>                                 | <b>8.7 Amp.</b>                      |
| <b>VOLTAGE</b>                               | <b>220V, 1 Phase, 60 Hz</b>          |
| <b>ASSEMBLED DIMENSIONS (LxWxH) / WEIGHT</b> | <b>65" x 28" x 28" / 710 lbs</b>     |
| <b>PACKAGING DIMENSIONS (LxWxH) / WEIGHT</b> | <b>65-3/8" x 29" x 29" / 925 lbs</b> |
| <b>UPC</b>                                   | <b>7 72995 00268 9</b>               |