


12" x 36" Gearhead Metal Lathe With Taper Attachment

Product Features:

- Powerful 1.5 HP motor
- Safety guard with limit switch protection
- Line interruption switch system needs a restart after a power failure
- Guideway and gears in headstock are all hardened and precision ground
- Comes complete with 6"-3 jaw chuck, 8"-4 jaw chuck, imperial and metric gears, quick change tool post, steady rest, follow rest, 10" DI-4 camlock face plate, thread chasing dial indicator, MT#3 dead center, MT#3 arbor taper, 1/2" drill chuck, full length splash guard, tool box, chuck keys and hex. keys

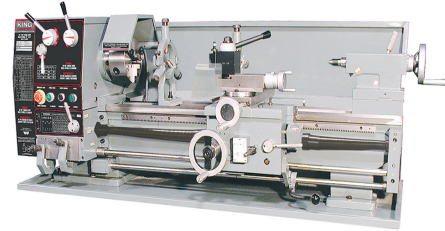

MODEL	KC-1236ML/KM-053
DISTANCE BETWEEN CENTERS	36"
SWING OVER BED	12"
SPINDLE BORE	1-1/2"
SWING OVER CROSS SLIDE	7-1/4"
TAPER IN HEADSTOCK	MT #5
TAPER IN TAILSTOCK	MT #3
WIDTH OF BEDWAYS	7-1/4"
TOTAL TRAVEL OF CROSS SLIDE	6-3/8"
TOTAL TRAVEL OF TOP SLIDE	3-3/8"
SPINDLE SPEEDS	9 (60-1,500) RPM
THREAD CUTTING RANGE	40 (4-112 TPI) 30 (0.2-4.5 mm)
MOTOR	8.7 Amp.
VOLTAGE	220V, 1 Phase, 60 Hz
ASSEMBLED DIMENSIONS (LxWxH) / WEIGHT	65" x 28" x 28" / 710 lbs
PACKAGING DIMENSIONS (LxWxH) / WEIGHT	65-3/8" x 29" x 29" / 925 lbs
UPC	7 72995 00273 3