


## 16" x 20" Combo Lathe/Mill

### Product Features:

- Two powerful 3/4 HP 110V motors
- Lathe chuck and drill chuck safety guards with limit switch protection and standard tool post safety guard
- Easily change from Lathe mode to Mill mode
- Forward/reverse switch for both operating modes
- Bedways are hardened and precision ground
- Comes with 5"- 3 jaw chuck, imperial and metric change gears, quick change tool post, steady rest, follow rest, thread chasing dial indicator, MT#3 and MT#4 dead centres, 1/2" drill chuck and tool box with adjusting tools

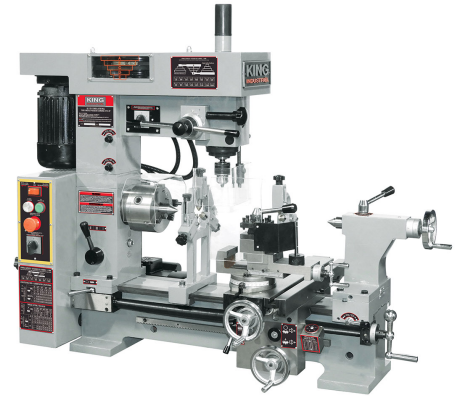

<b>MODEL</b>	<b>KC-1620CLM</b>
<b>DISTANCE BETWEEN CENTRES</b>	20"
<b>SWING OVER BED AND CARRIAGE</b>	16-1/2" / 11-1/2"
<b>SPINDLE BORE</b>	1-1/8"
<b>HEADSTOCK/TAILSTOCK TAPERS</b>	MT#4 / MT#3
<b>DRILL PRESS QUILL TAPER</b>	MT#3
<b>CROSS SLIDE TRAVEL</b>	8"
<b>LATHE SPINDLE SPEEDS</b>	7 (160-1,360 RPM)
<b>THREAD CUTTING RANGE</b>	36 (4-120 TPI) 22 (0.2-6 mm)
<b>AUTOMATIC FEEDING RANGE</b>	0.002-0.014" / 0.05-0.35 mm
<b>DRILLING/FACE MILL/END MILL CAPACITIES</b>	7/8" / 1-1/8" / 3-1/8"
<b>MAX. DISTANCE SPINDLE NOSE TO MILLING TABLE</b>	12"
<b>DRILLING SPEEDS</b>	16 (120-3,000 RPM)
<b>MOTORS (LATHE/MILL)</b>	3/4 HP, 110V, 9 Amp., 1 Phase, 60 Hz
<b>ASSEMBLED DIMENSIONS (LxWxH) / WEIGHT</b>	43" x 19-1/2" x 38" / 515 lbs
<b>PACKAGE DIMENSIONS (LxWxH) / WEIGHT</b>	45" x 23" x 42" / 615 lbs
<b>UPC</b>	7 72995 01540 5