

INSPIRATION

This project started in our weekly Top-of-the-Line Club when we used Erika Mulvenna's Record Album Coaster project from WeAllSew.com. We just took it a bit further...

WATCH GAYLE'S YOU TUBE TUTORIAL HERE





FROM OUR
INTERACTIVE HANDOUT
FOUND IN THE
DESCRIPTION OF THIS
VIDEO

OPTIONAL EMBROIDERY

DOWNLOAD OUR 45 RPM Adapter design Fille HERE

Two Files. Singular design and four designs

SUPPLIES

Fat Quarter Club Kit

1 Yard Fusible Fleece

1 Yard Shape Flex SF-101

OPTONAL: Large Hoop Size of <u>Medium</u> weight tear a way stabilizer

¼ Yard <u>grey fabric</u>to embroider your 45 RPM adapter design

 If you do not have embroidery, use another fabric from the fat quarter club kit

Thread to match solid fabrics — We use Isacord Thread but any sewing or embroidery thread is appropriate

OPTIONAL: <u>Glow in the Dark Thread</u> for 45 RPM Insert Design

MACHINE SUPPLIES

#20 Open Toe Embroidery Foot

<u>Circular Embroidery Attachment</u>

Eyelet Attachment

OPTIONAL: Embroidery Machine

BERNINA Large Oval or

BERNINA Small Square Clamp Hoop

Size 90 Embroidery Needle

Applique Scissors

Small Snips

Fine point marking pen

THE FABRIC

Some Substitutions may apply


Pure Solids: Sweet Tangerine

Tula Pink Solids: Cosmo

Black tone on tone (May Vary)

Ruby Star Society:

- Sugar Cone Gummy Bears in Merry
- Sugar Cone Straws in Macaron
- Sugar Cone Push Pops in Royal Blue

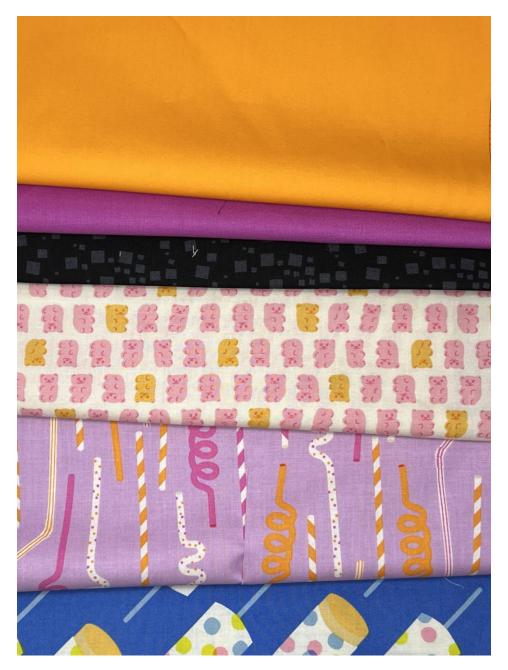

PREPARATION

EMBROIDERY

Fuse a piece of SF-101 on to the back side of a grey fabric piece to fit in your chosen hoop

Hoop Medium weight tear away and gray fabric

Thread the machine with the glow in the dark thread and bobbin fill in the bobbin

Stitch a 45 RPM Adapter design per each coaster

COASTERS

PER COASTER CUT:

2-8" squares solid or Tone on Tone, and SF 101

1-8" square Fusible Fleece

2-4" squares print fabric, SF-101

18" square medium weight stabilizer

FUSING and MARKING

Fuse the SF-101 to the wrong side of all coordinating pieces

On one 8" solid piece, fuse the fusible fleece

Measure and mark the center of each 8" and 4" square

 Use a fine point marking pen or an awl – this mark needs to be accurate

ASSEMBLY

Attach the Circular Embroidery Attachment on to the machine

Use Foot #20 and the #1 straight stitch
Set the radius of the circular embroidery
attachment to 3.5"

 It may be necessary to adjust the needle position to achieve a precise measurement

Layer the components

- 1. Place the Fusible fleece piece, right side up, poking the sharp tack through the center mark
- 2. Place the non-fusible fleece piece right side down, poking the sharp tack through the center mark






ASSEMBLY

Remove the work from the circular embroidery attachment and trim the excess fabric away, leaving approximately 1/8" away from the sewn seam.

Cut a small hole in the center of the non-fusible fleece piece

Turn inside out and press

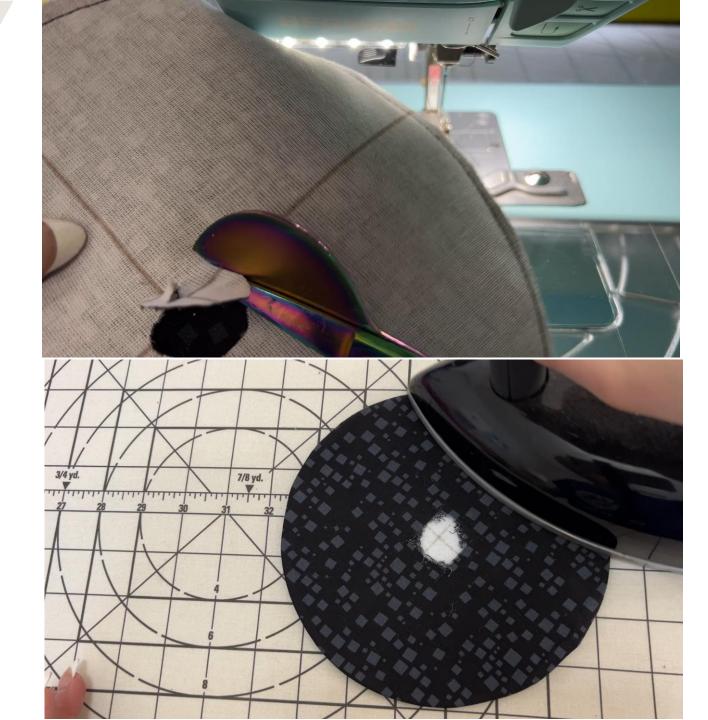


APPLIQUE CENTER CIRCLES

Return to the machine and stack the fabric exactly this way:

- 1. 4" square with marking on the wring side, wrong side up placing the marked intersection over the tack
- 2. Disc, with the hole side up and tack inserted back through the middle marking
- 3. 4" square with small center marking on the right side, sight side up

Adjust the radius on the circular embroidery attachment to 1 7/8"

- Be mindful that you may need to move your needle position for precise stitching
- Stitch

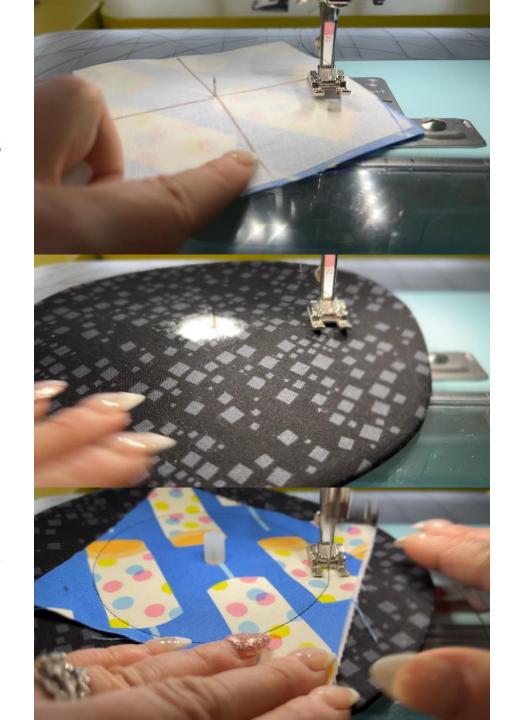

APPLIQUE CENTER CIRCLES

Trim the top fabric really close to the stitched line

Carefully trip the underside piece really close to the stitching line

Set you machine up for q #2 Zigag stitch

- Stitch Width = 4.5mm
- Stitch Length = 0.4mm
- Needle position should be adjusted to catch as much of the fabric being appliques as possible
- Stitch





APPLIQUE CENTER CIRCLES

Add the center circle

- If you embroidered, add the 45 RPM Adapter stitch out by centering the tack in the middle of the small circle
- If no embroidery, mark the center of a 2" square of center fabric of your choice and place on the tack in the marked center

Use a straight stitch, then slide the radius of the circular embroidery attachment to be stitching a straight line approximately 1/8" away from the embroidered design.

For non embroidery, set radius to 7/8"
 Switch back to #2 stitch and applique



QUILTING

Set the stitch back to the #1/ Straight stitch

Align the left side of the foot with the outer rim of the center circle and stitch

Move the radius to the left and align the previously stitched line to the left of the foot

Repeat once more

You will have 3 quilted lines.


 Be careful to not put or tug at the circular embroidery attachment, otherwise you may make a weird spiral.



EYELETS

Remove the circular embroidery attachment Install the Eyelet Attachment

- #92 Foot
- Feed Dogs dropped
- #2 Stitch (press the clr button to clear out the settings)
- Insert the 3/16" plug into the eyelet plate
- Use the 3/16" hole cutter to make a hole in the center of the "adapter"

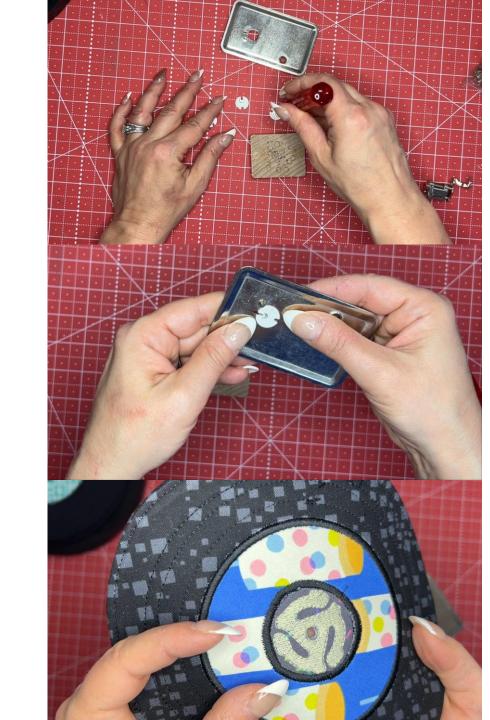


STITCHING THE EYELETS

Smush the center hole over the eyelet attachment nub

It is up to you to spin the work around the nub as you sew

Go around one time with a sparse stitch, then a second time more filled in

Repeat until the eyelet is pleasing to you

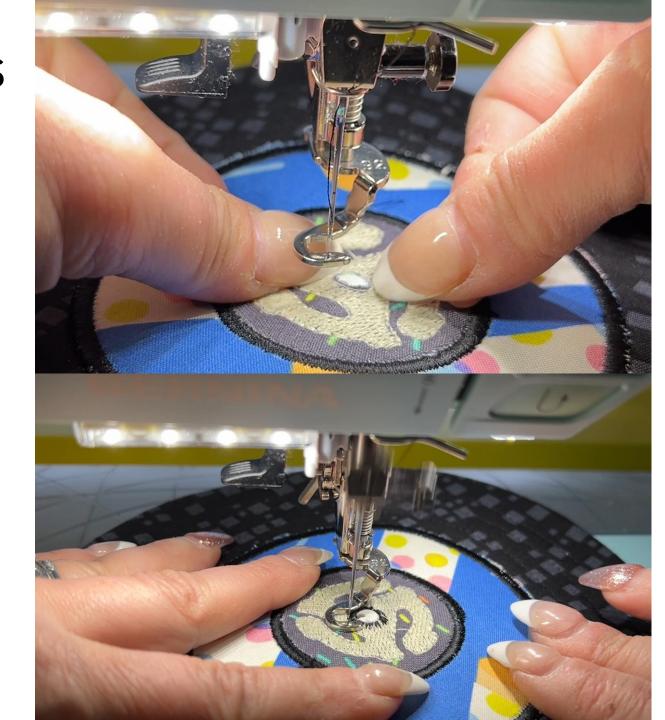

ADDITIONAL IDEAS

Use as a Frisbee®

Add misquoted song lyrics using your combination mode with lettering.

Make a turn table (see page 17).





USEFUL LINKS

How to use the BERNINA Eyelet
Attachment

Circular Embroidery Attachment

How to combine letters and stitch them on a BERNINA Sewing Machine







TURNTABLE SUPPLIES

Wood

Pine Circle Plaque

1/4" Dowel cut to 3"

TOOL:

Drill with a ¼" bit

Drill the hole in the center of the plaque

Other Supplies:

Sponge Brush

Wood Glue

Black — Paint it Black — I want to see you paint it, paint it, Paint it Black!







FOLLOW BERNINA OF NAPERVILLE ON INSTAGRAM, YOUTUBE SHORTS AND TIKTOK FOR HOUSE CHRONICLES AND QUILT UPDATES









@berninaofnaperville