



### **FEATURES**

- 1-Person CapacityPremium 204 Powder Coated Stainless Steel Exterior
- Insulated 304 Stainless Steel Cold Plunge Tub
- Premium Pacific Cedar Trim with Water **Protection Stain**
- Exterior Dimensions: 50" Length x 32.5" Wide x 31.5" Tall
- Premium Pacific Cedar Step for Easy Entry and Exit
- Custom Cover
- 5 Year Warranty on Structure
- Dry Weight: 250 lbsTotal Weight with Water: Approx. 1200 lbs

\$6,499

DCT-S-050-SS

#### **ELECTRCIAL**


Electrical Service: 120V/20amp



NEMA 5-20R GFCI Outlet





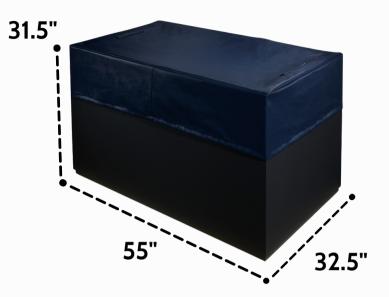



### **FEATURES**

- 1-Person CapacityPremium 204 Powder Coated Stainless Steel Exterior
- Insulated 304 Stainless Steel Cold Plunge Tub
- Premium Pacific Cedar Trim with Water **Protection Stain**
- Exterior Dimensions: 55" Length x 32.5" Wide x 31.5" Tall
- Premium Pacific Cedar Step for Easy Entry and Exit
- Custom Cover
- 5 Year Warranty on Structure
- Dry Weight: 250 lbsTotal Weight with Water: Approx. 1200 lbs

\$6,999

DCT-S-055-SS

#### **ELECTRCIAL**

Electrical Service: 120V/20amp



NEMA 5-20R GFCI Outlet





# **CPG Chilling System**

### .6 Horsepower **Smart Chilling System**



### **ELECTRCIAL**

Electrical Service: 120V/20amp/60Hz

NEMA 5-20R GFCI Outlet



610W / 5.1 AMPS





### **FEATURES**

- .6 HP Powerful Cooling (Min 37°F / 3°C)
- 1-3°F of Cooling Every 40 Minutes
- Heat Function (Max 80°F / 26°C)
- Wifi Enabled Mobile App Controlled
- 5" Touchscreen Digital Display
  15-Micron Filtration (4.5" Replaceable
- Automated Ozone Sanitation
- Self-Priming High-Flow Rate Pump
- GFCI Protection
- Includes: Hose Kit, Filter Wrench, & Two Filter Cartridge Replacements
  Lockable Casters
- Steel Reinforced Inset Carrying Handles
- Quick Connect Fittings
- Overheating Protection
- Max Temperature Exposure 85°F
- Min Temperature Exposure 32°F
- 1 Year Warranty
- Weight: 50 lbs<sup>2</sup>
- Dimensions (LxWxH): 19"x12"x19"

\$2,799

DCT-SY-06-HC



# **CPG Chilling System**

### .8 Horsepower **Smart Chilling System**



### **ELECTRCIAL**

Electrical Service: 120V/20amp/60Hz

NEMA 5-20R GFCI Outlet



725W / 6.1 AMPS





### **FEATURES**

- .8 HP Powerful Cooling (Min 37°F / 3°C)
- 1-3°F of Cooling Every 30 Minutes
- Heat Function (Max 80°F / 26°C)
- Wifi Enabled Mobile App Controlled
- 5" Touchscreen Digital Display
  15-Micron Filtration (10.5" Replaceable
- Automated Ozone Sanitation
- Self-Priming High-Flow Rate Pump
- GFCI Protection
- Includes: Hose Kit, Filter Wrench, & Two Filter Cartridge Replacements
- Lockable Casters
- Steel Reinforced Inset Carrying Handles
- Quick Connect Fittings
- Overheating Protection
- Max Temperature Exposure 90°F
- Min Temperature Exposure 32°F
- 1 Year Warranty
- Weight: 50 lbs<sup>2</sup>
- Dimensions (LxWxH): 19"x12"x19"

\$3,299

DCT-SY-08-HC



# **CPG Chilling System**

# 1 Horsepower Smart Chilling System



### **ELECTRCIAL**

Electrical Service: 120V/20amp/60Hz

NEMA 5-20R GFCI Outlet



1170W / 9.75 AMPS





### **FEATURES**

- 1 HP Powerful Cooling (Min 37°F / 3°C)
- 1-3°F of Cooling Every 20 Minutes
- Heat Function (Max 80°F / 26°C)
- Wifi Enabled Mobile App Controlled
- 5" Touchscreen Digital Display
  15-Micron Filtration (10.5" Replaceable
- Automated Ozone Sanitation
- Self-Priming High-Flow Rate Pump
- GFCI Protection
- Includes: Hose Kit, Filter Wrench, & Two Filter Cartridge Replacements
  Lockable Casters
- Steel Reinforced Inset Carrying Handles
- Quick Connect Fittings
- Overheating Protection
- Max Temperature Exposure 95°F
- Min Temperature Exposure 32°F
- 1 Year Warranty
- Weight: 50 lbs
- Dimensions (LxWxH): 19"x12"x19"

\$3,999

DCT-SY-10-HC

