

65½'

Reliance R6632CRFS

65.5" x 32" x 20"

Installation: Freestanding


GENERAL SPECIFICATIONS:

Material Acrylic

Soaker Weight 130 lbs / 58.97 kg **Maximum Fill** 70 gal to overflow

NOTE: Filling this tub to the maximum may require an above average size or dedicated

water heater.

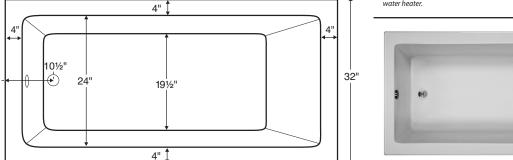

106

inside view of tub



Virtual Spout integrated high-flow tub filler. See 'packages and options' below.

Requires use of a wall-mounted or freestanding tub filler. The drain and overflow assembly is concealed between the walls of the tub, eliminating the need for an exposed drain kit. 121

191/4"

20"

PACKAGES AND OPTIONS

Hydrotherapy Package	Package Contents	Part #
Soaker	soaking bath - no jets; textured bottom, pre-leveled foam base	R6632CRFS
Soaker with Virtual Spout	soaking bath - no jets; includes Virtual Spout integrated high-flow tub filler (see important information below), textured bottom, pre-leveled foam base	R6632CRFSVS

OPTIONS

16'

Access panel for drain or Virtual

Spout installation May be elminated

Standard Color - White

Color Upgrade - Biscuit (RFSCOL)

161/2"

Quick Ship - reduces lead time - call for availability

Lift & Turn Drain Kit -

Chrome (RWOC); Brushed Nickel (RWOBN), White (RWOW)

48'

NOTE: Tub includes an access panel (standard) for drain or Virtual Spout installation, and protrudes 1/2" from the drain end of the tub. Depending on how the tub is positioned, the panel may be visible. Access panel can be elminated by request, which will increase installation difficulty.

Must specify on order.



IMPORTANT INFORMATION

- Specifications and configurations are subject to change without notice.
- Measurements are $\pm 1/2$ " and are subject to change without notice.
- Measurements herein supersede all others published prior to publication date shown below.
- The **Virtual Spout** is installed below the water level of the tub. A Wilkins dual check valve and an Acme in-wall atmospheric vent are provided to prevent backflow into the potable water supply. However, some areas of the country require additional backflow prevention when water is introduced to the bath below the water level (check local codes).