## The revolutionary pneumatic version of our popular InBlade cutter

**The InBlade Pro** adds the comfort to the already unique features of the InBlade thanks to the power of the pneumatic cylinder that moves quickly and accurately the cutting head. The pneumatic cylinder combined with the reliable linear bearing system to guide the cutting head allows the cutting of any material with no need of downward hand pressure.

**The InBlade Pro** is equipped also with a speed control to regulate the velocity of the cutting head depending on the material to be cut, required to guarantee a smooth cut for all uses. The interchangeable cutting head system offers an easy-to-use solution to hold all the available cutting heads and it is ready for being used by new tools developed in the future.

**The InBlade Pro** cutter is available in four cutting sizes 165 cm (65"), 210 cm (82"), 250 cm (98") & 305 cm (120 ") and it allows cutting the surprising maximum thickness of 20 mm.

## **Features:**



**Robust pneumatic cylinder** to move the cutting head quickly and cut any material with no effort.



**Two bearing blocks** located on a linear rail for reliable and accurate cutting head guidance.



**The pneumatic clamping system** offers an easy, fast and reliable way to hold the material. Speed control to regulate the cutting velocity.



**Cutting thickness** up to 20 mm for semi-rigid materials.

## Other features:

- ✓ Interchangeable cutting head system.
- ✓ Laser Beam to indicate the cutting line. Common for all the tools.
- ✓ Telescopic legs to find easily the most comfortable working position.
- ✓ Easy to set up and to square through the adjusting square system.
- Mounted on the wall or supported by a free standing accessory.





**ALUM COMPOSITE** 

Up to 4 mm -Included-Ref. 45 19 90



TRIPLE BLADE

Up to 20 mm -Accessory-Ref. 45 18 97



**ACRYLIC** 

Up to 6 mm -Accessory-Ref. 45 18 96



**SEMI-RIGIDS** 

Up to 13 mm -Included-Ref. 45 19 91



**GLASS** 

Up to 6 mm -Accessory-Ref. 45 18 99




**V-GROOVE SEMI-RIGIDS** 

Up to 20 mm
-AccessoryRef. 45 19 85 / 45 19 86





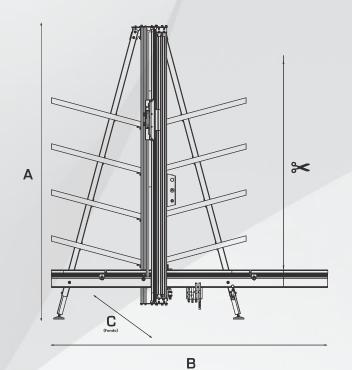

RIGIDS	Max. thickness	
PVC Foamboard	13 mm	
Aluminium composite / Dibond®	4 mm	
Aluminium sheets / CromaLuxe®	1 mm	
MDF / Wood	4 mm	
Acrylics / Plexiglas®	6 mm * / ** / �	
Glass	6 mm * / <b>&gt;</b>	
SEMI-RIGIDS	Max. thickness	
Foamboard	13 mm / 20 mm *	
Cardboard	13 mm / 20 mm *	
Honeycomb / Re-board®	13 mm / 20 mm *	
Corrugated plastic	13 mm	
Passepartout	✓	
V-GROOVE	Max. thickness	
Aluminium composite / Dibond®	4 mm *	
Honeycomb / Re-board®	20 mm *	
Foamboard	13 mm *	

<sup>\*</sup> Optional accessory required. \*\* Possible but not for daily use. \$ Score and snap.

Technical Information	72 85 81 Inblade Pro 165	72 85 82 Inblade Pro 210	72 85 83 Inblade Pro 250	72 85 84 Inblade Pro 305
Cutting head	Pneumatic	Pneumatic	Pneumatic	Pneumatic
Clam system	Pneumatic	Pneumatic	Pneumatic	Pneumatic
Max. cutting height	165 cm / 65 "	210 cm / 82 "	250 cm / 98 "	305 cm / 120 "
Dimensiones A x B x C	225 x 210 x 56 cm 88,5 x 82 x 22 "	268 x 210 x 56 cm 105 x 82 x 22 "	310 x 210 x 56 cm 122 x 82 x 22 "	365 x 210 x 56 cm 143 x 82 x 22 "
Weight	70 Kg / 154 lb	85 Kg / 187 lb	104 Kg / 229 lb	128 Kg / 282 lb
Packing dimensions	231 x 49 x 46 cm	278 x 49 x 46 cm	331 x 49 x 46 cm	410 x 49 x 46 cm
Packing weight	94 Kg 105 Kg (+ free standing)	115 Kg 127 Kg (+ free standing)	134 Kg 148 Kg (+ free standing)	182 Kg 198 Kg (+ free standing

## **Accessories**

45 19 90
45 19 91
45 18 96
45 18 97
45 18 98
45 18 99
45 19 04
45 19 85
45 19 86
14 20 08
45 06 51
45 18 01
45 18 02

Free standing Inblade, 250	45 19 13
Free standing Inblade, 305	45 19 14
Trapezoid blades -100 u-	13 01 30
Acrylic scoring blades -5 u-	13 01 25
V-Groove blades	13 01 71
Circular blades -2 u-	13 01 72
Re-board® V-Groove blades	13 01 79
Foamboard V-Groove blades	13 01 80
Glass cutting wheel	14 07 43
Compressor, 1 Hp -24 I-	02 09 40
Compressor OS20P, 2 Hp -24 l-	02 09 24
Compressor L20, 2 Hp -24 I-	02 09 26