


Adhesive Backed Underlay

PLF0012-65

Contact
 +44 (0) 1524 481 118
 info@plusfloor.com
 plusfloor.com

Product Information

Construction	Permanent resilient underlay including mineral fillers and polyurethan binder
Product Range	PlusFloor Accessories
Thickness	1.8mm
Roll Size	6.5m ² per roll
Width	1m
Area Weight	2.6kg/m ²
Weight Per Roll	16.9kg/roll

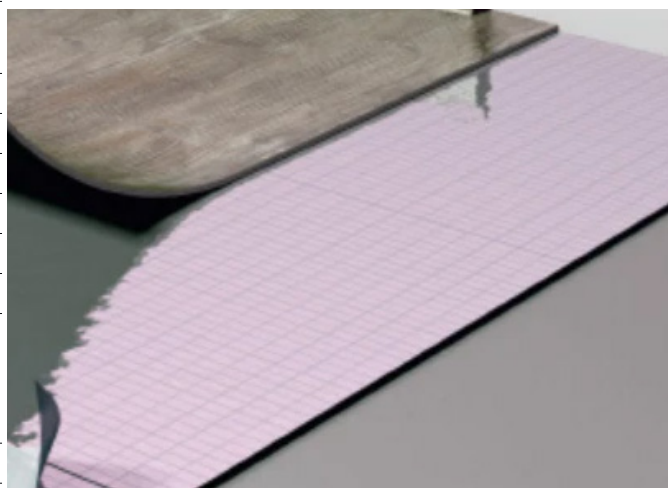

Performance

Inflammability	EN13501	Bfl-S1
Impact Sound Reduction in combination w/ 4.5mm		
Click LVT	ΔLw= 13dB	EN ISO10140-3
Impact Sound Reduction in combination w/ 2.5mm		
Click LVT	ΔLw= 10dB	EN ISO10140-3
Thermal Resistance R	0.01m ²	DIN 52616
Underfloor Heating	Max. 27° C	EN 12524

Installation and Warranty

All PlusFloor floors must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. PlusFloor's warranty will apply only to floors which have been installed by a competent flooring installer comparable to BS8201 in the UK or equivalent standard worldwide.

© This technical data sheet was written by PlusFloor, Carnforth Business Park, Oakwood Way, Carnforth, Lancashire, LA5 9FD. At the time of writing and publication of this document, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.