



plusfloor


Formation Herringbone

Luxury vinyl glue down herringbone

A true flooring classic, parquet floors have once again come to the fore front of cutting edge design, complimenting both modern and classic interior styles

Our Herringbone collection provides a touch of sophistication to any space, large or small, with the elegance of the pattern drawing the eye.

Plusfloor

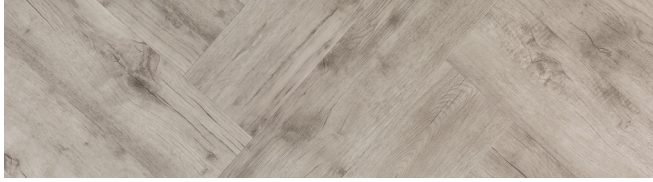

Clouded Ice

PLF4266GH




Pastel Blanc

PLF4252GH




Pure Oyster

PLF4260GH

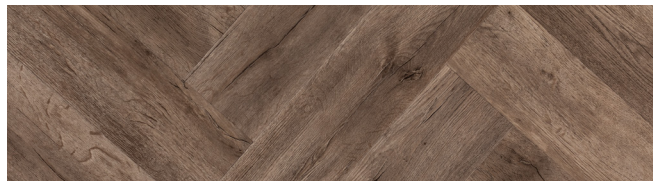


Silvery Clay

PLF4262GH

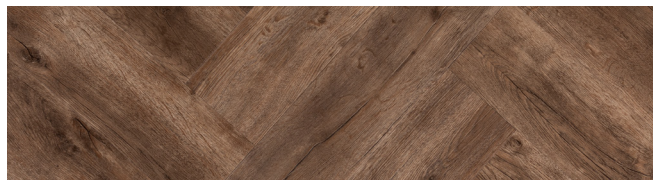


Bronzed Urbane

PLF4258GH

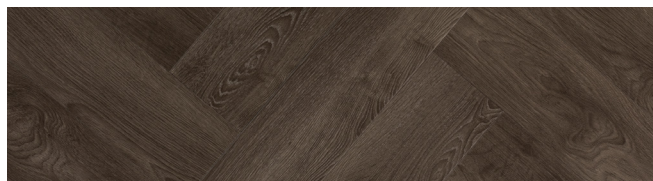

Blanched Carbon

PLF4264GH

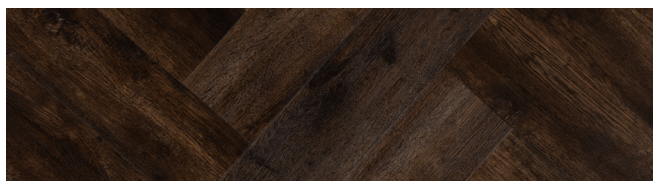

Burnt Cocoa

PLF4268GH

Formation Herringbone




White Washed

PLF4250GH




French Loft

PLF4254GH

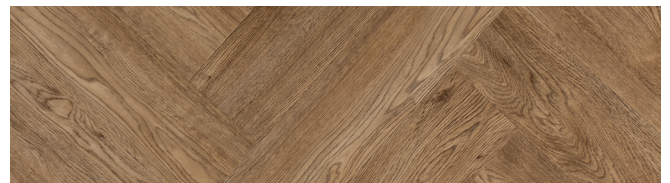

Rich Savannah

PLF4245GH

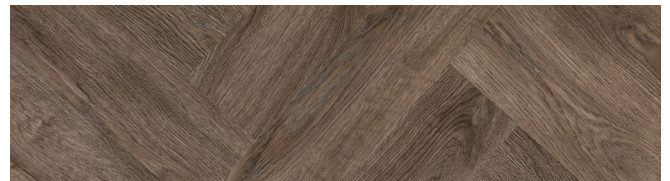


Country Grey

PLF4230GH




Warm Hessian

PLF4256GH

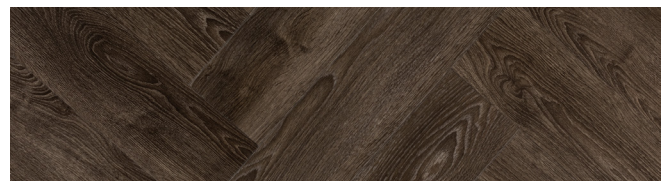

Smoked Azur

PLF4235GH

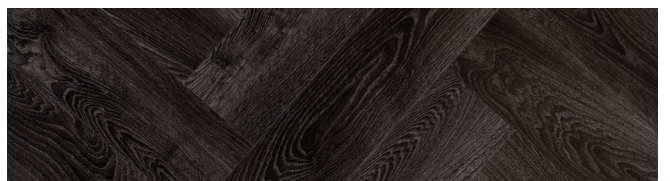

Midnight Charcoal

PLF4240GH

Product Details

Product Codes	PLF4230–PLF4268	
Format	Herringbone	EN ISO 24342
Finish	TrueGrain	
Profile	Butt	
Edge Profile	Bevelled	
Thickness	2.5mm	EN ISO 24346
Width	160mm	±0.10mm
Length	630mm	
Wear Layer	0.55mm	EN ISO 24340
Pack Size	2.40m ² /box	8pcs/box
Weight	4.059	EN ISO 23997

Installation & Maintenance

Fully Bonded	Yes
Nailed	No

Technical Criteria

Origin	Europe	
Level of use	EN ISO 10874	23 - 33 - 42
Inflammability	EN 13501	Bfl-S1
Scratch resistance	EN ISO 660-2	Class T
Squareness & straightness	EN ISO 24342b	≤ 0,35 mm
Residual indentation	EN ISO 24343-1	≤ 0,10 mm
Furniture leg resistance	EN ISO 16581	
Curling	EN ISO 23999	≤ 2 mm
Electrical resistance	EN 1081	≤ 109 Ohm
Dimensional stability	EN ISO 23999	
Slip Rating	36+ PTV	
Heat insulation	EN ISO 10456	0,25 w/(m.K)
Thermal resistance R	EN 12664	0,0100 m ² .K/W
Electrostatic performance	EN 1815	< 2 kV
Formaldehyde group	EN 717-1	E1
Acoustic insulation	EN ISO 717-2	4 dB
Castor chair resistance	EN ISO 4918	
Stain resistance	EN ISO 26987	Very good
Light fastness	EN ISO 105-B02	≥6
Underfloor heating	EN 12524	Suitable, max 27°C
Warranty (year)	30 Residential	10 Commercial

The warranty covers manufacturing defects and premature wear in the event of normal use.

Installation & Warranty

All Plusfloor floors must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. Plusfloor's warranty will apply only to floors which have been installed by a competent flooring installer comparable to BS8201 in the UK or equivalent standard worldwide.

© This technical data sheet was written by Plusfloor, Carnforth Business Park, Oakwood Way, Carnforth, Lancashire, LA5 9FD. At the time of writing and publication of this folder, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.

plusfloor
Luxury vinyl

www.plusfloor.com

info@plusfloor.com

T: +44(0)1524 481118

Part of The Havwoods International Group