




# plusfloor

## METRO

Metro is our heavy loop pile carpet tile with an imposing record of service. Metro offers that extra comfort under foot along with many possibilities for choice and design with its varied palette of colourways.


Heavy Contract  
Designer Carpet Tile

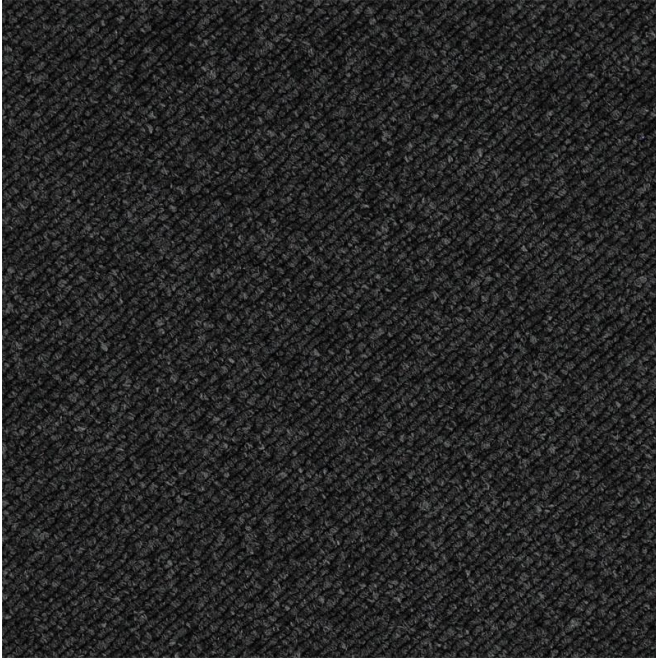

Black Shimmer



Granite Glisten

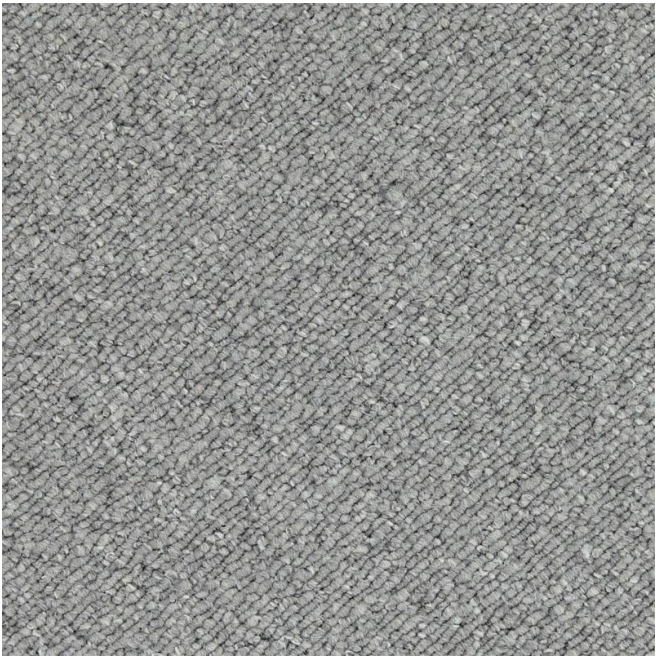

Dove Glare



Sand Sheen



Dark Bronze




Taupe Spark



Cherry Gloss



Nautical Blue

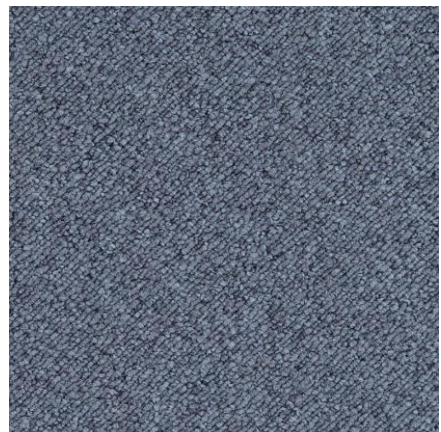

Teal Glow



INSTALL INSPIRATION

# plusfloor METRO

Metro is our heavy loop pile carpet tile with an imposing record of service. Metro offers that extra comfort under foot along with many possibilities for choice and design with its varied palette of 9 colourways. This is a heavy wear tile making it suitable for a wide range of locations such as executive offices, communal spaces and meeting rooms.

- **Heavy Wear** – Metro has a 10year commercial wear guarantee and is 950 gr/m<sup>2</sup> which is designed to give excellent functionality in heavy wear areas
- **Design & Appearance** – With a warm colour palette of 9 modern shades it gives you flexibility and honest functionality when creating your space.

## TECHNICAL SPECIFICATION

Product definition		: Tufted loop pile
Pile fibre		: 100% Solution Dyed Nylon
Pile weight	ISO 8543	: 950 gr/m <sup>2</sup> ± 5%
Total thickness	ISO 1765	: 8.0 mm ± 5%
Total weight	ISO 8543	: 4431 gr/m <sup>2</sup> ± 7,5%
Tile size		: 50 x 50 cm
Tile backing		: Polyflex 70% Recycled
Tiles per box		: 20

## PERFORMANCE

Use classification		: Class 33
Castor chair test	EN 985	: A, continues use
Thermal isolation	ISO 8302	: 0.09 m <sup>2</sup> K/W
Dimensional stability	ISO 2551	: Pass

## ELECTROSTATIC PROPERTIES

Walk on test	ISO 6356	: -0.1 kV
Static loading		: Anti-static

## FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2	
	EN ISO 9239-1	: B <sub>fl</sub> – s1
Hot metal nut test	BS 4790	: Low Radius

## COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: > 5.0
Rubbing, dry	ISO 105 X12	: 4.5
Rubbing, wet	ISO 105 X12	: 5.0
Shampoo	BS 1006	: 4.5
Water	ISO 105 E01	: 5.0

## GENERAL

Recommended maintenance: Best results are obtained when cleaned with a dry shampoo method.

Pile direction: Directional arrows are printed on the back of each tile, can be laid Monolithic or Directional for best effect.

Laying instructions: PLUSFLOOR flooring products are to be installed in full accordance with recommended installation instructions. It is advisable to install using tackifier or spray adhesive.

PLUSFLOOR reserves the right to amend this specification without giving prior notice. For the latest version of the technical specifications email [info@plusfloor.com](mailto:info@plusfloor.com).



Please email [info@plusfloor.com](mailto:info@plusfloor.com) for further product details and sample requests.