PlusFloor.

Carpet Midnight Sun




Midnight Sun

Coordinates with Polar Breeze.

With a continuous, cross-hatch design, Midnight Sun complements the colours and textures of the Polar Breeze collection. Inspired by the transitional phenomenon of the midnight sun at dusk, the design reflects the passing of time through a repeated, scattered pattern.

- + 100% recycled BaseZero backing
- + Coordinates with Polar Breeze
- + Ideal for creating feature areas
- + On-trend colour ways



Tile 500 x 500 x 5mm



PLF1307 Obsidian

Our BaseZero carpet tile backing is made from 100% recycled materials and contains zero toxins. It is completely recyclable as part of our LoopBack initiative*.





Scan for more information or call us on **01524 481 118**









PLF1309 Shale Grey



PLF1307 Obsidian



PLF1306 Tundra Rose



PLF1303 Spear Moss PLF1308 Ocean Drift





Cottongrass




PLF1301



Shale Grey


PLF1309

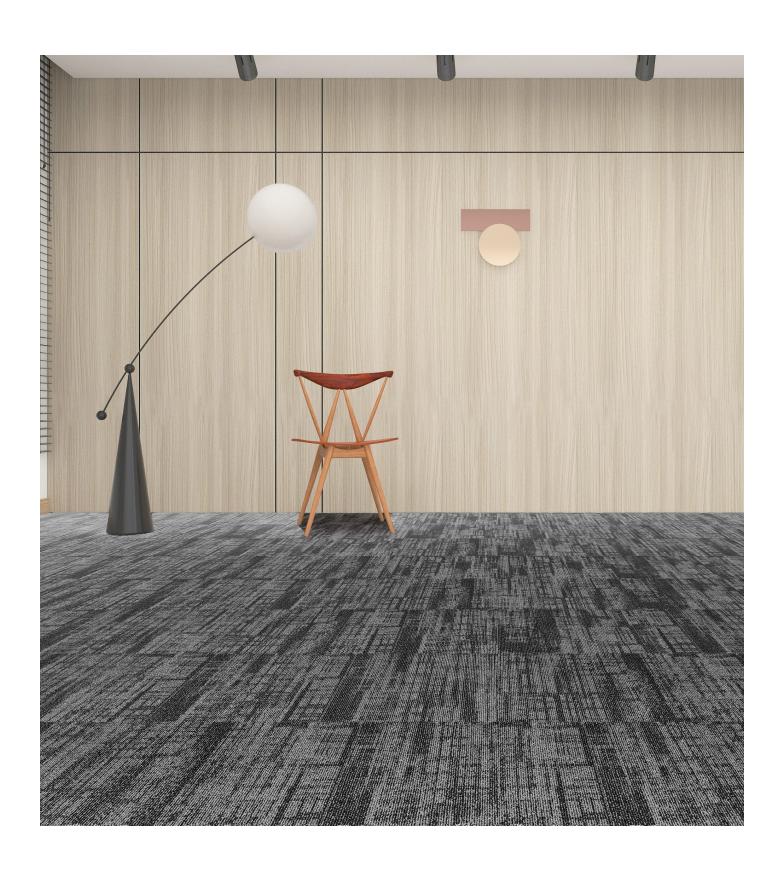

Obsidian



PLF1307

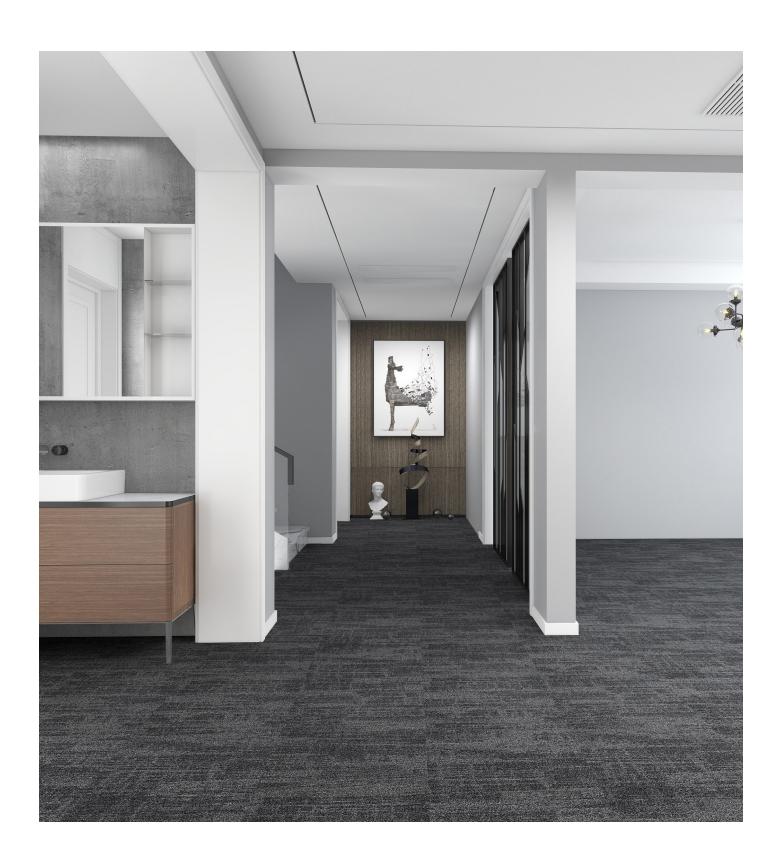





PLF1306

Tundra Rose



Spear Moss




PLF1303



Ocean Drift

PLF1308

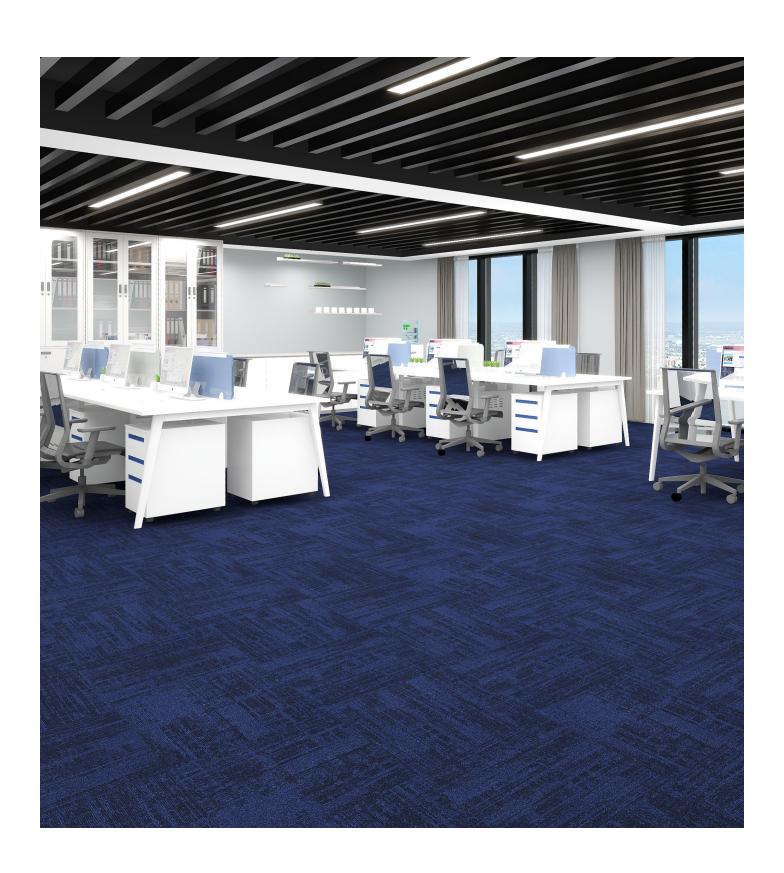

Carpet

Midnight Sun

Product

Surface Texture	Tufted multi-loop pile	
Pile Fibre	100% Solution Dyed Nylon	
Tile Backing	BaseZero	
Pile Weight	ISO 8543	520 g/m² (+/- 5%)
Pile Height	3mm - 3.5mm	
Total Thickness	ISO 1765	5.1mm (+/- 5%)
Total Weight	ISO 8543	3000 g/m ² (+/- 7.5%)
Tile Size	500 x 500 x 5mm	
Tiles Per Box	20	5m ² coverage

Technical

Use Classification	Method EN 1307	Class 33
Castor Chair Test	EN 985	A, Continuous Use
Dimensional Stability	EN 986	Pass
Thermal Isolation	ISO 8302	0.08 m ² K/W
Sound Absorption	ISO 140-8	26 DB
Walk On Test - Static Loading	ISO 6356	< -0.1 kV Antistatic
Reaction to fire	EN ISO 11925-1	BFL-S1
Light Fastness	ISO 105 B02	>5
Warranty	15 Years (Commercial)	

PlusFloor.

01524 481 118 info@plusfloor.com plusfloor.com

> London Showroom 66a Turnmill Street

London, EC1M 5RR

Innovation + Distribution Centre

th Oakwood Way
Carnforth Business Park
Carnforth, LA5 9FD

^{*} Our LoopBack scheme enables carpet tiles to be uplifted from site, cleaned and reused in non-critical locations to extend their useful life.