

PlusFloor®

Vinyl  
Composition




# Composition


Loose Lay Vinyl Planks and Tiles

Our refreshed Composition Loose Lay comes in beautiful wood plank designs and on-trend stone patterns, including NEW terrazzo and marble styles. Composition is a fast-fit solution offering easy installation and minimal downtime.


- + Stunning new stone patterns
- + TrueGrain embossing
- + 36 PTV Rating (Wet)
- + Easy to install

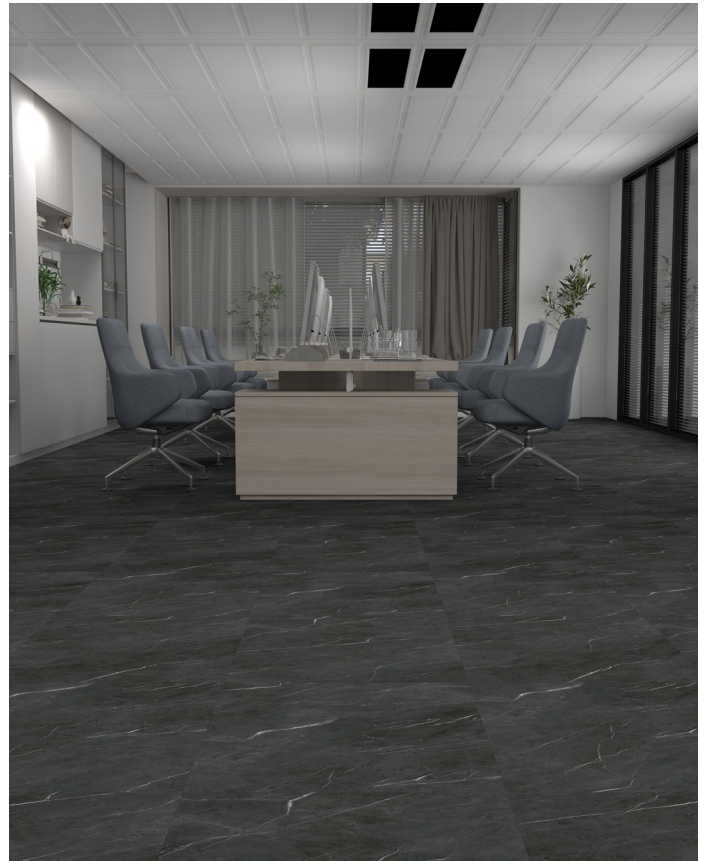

PLF4317 Portoro Marble



**Plank**  
1230 x 190 x 5mm



**Tile**  
610 x 610 x 5mm



TrueGrain

**20**

Year  
Residential  
Guarantee

**10**

Year  
Commercial  
Guarantee

Scan for more  
information or call  
us on **01524 481 118**



P



**PLF4311 Angora Wool**



**PLF4312 Brushed Cotton**



**PLF4313 Cool Linen**




**PLF4314 True Coir**




**PLF4315 Woven Cashmere**




**PLF4316 Abaca Root**



**PLF4317 Portoro Marble**

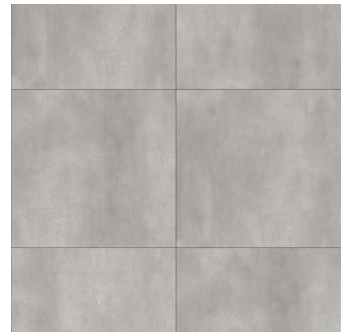

**PLF4318 Portico Stone**



**PLF4319 Venetian Terrazzo**



**PLF4320 Natural Pyrite**



# Angora Wool



PLF4311

# Brushed Cotton



PLF4312



# Cool Linen



PLF4313





**True Coir**

PLF4314



## Woven Cashmere



PLF4315






# Abaca Root

PLF4316




# Portoro Marble



PLF4317





## Portico Stone

PLF4318



# Venetian Terrazzo



PLF4319

# Natural Pyrite



PLF4320



# Vinyl Composition

## Product

	1-Strip Plank	Tile
Fixing	Glue Down	
Finish	TrueGrain embossing	
Profile	Butt Joint	
Edge	Bevelled	
Wear Layer	0.55mm	
Pack Size	1.84m <sup>2</sup> ; 8 planks per box	2.97m <sup>2</sup> ; 8 tiles per box

## Technical

Slip Resistance	36+ PTV (wet)	BS 7976-2 DIN51130
Water Resistance	Resistant	
Stain Resistance	Resistant	EN 423
Scratch Resistance	MSR-A2	EN 16094
Underfloor Heating	Suitable, max. 29°C	
Inflammability	Bfl-S1	EN 13501
Squareness	≤ 0.20mm	
Straightness	≤ 0.30mm	
Residual Indentation	~ 0.03mm	EN ISO 24343-1
Curling	≤ 2mm	EN ISO 23999
Dimensional Stability	≤ 0.15mm%	EN ISO 23999
Thermal Resistance R	0.039m <sup>2</sup> K/W	EN 12667
Formaldehyde Group	E1	EN 717-1:2014
Castor Chair Resistance	Resistant	EN ISO 4918
Light Fastness	≥6	EN ISO 105-B02
Warranty (Years)	20 (Residential)	10 (Commercial)

# PlusFloor®

01524 481 118  
info@plusfloor.com  
plusfloor.com

London Showroom  
66a Turnmill Street  
Clerkenwell  
London, EC1M 5RR

Innovation + Distribution Centre  
11 Oakwood Way  
Carnforth Business Park  
Carnforth, LA5 9FD