

PlusFloor®

Vinyl
Elements



Elements


Click Lock Vinyl Plank and Herringbone

Inspired by Medeleev's periodic table, our enhanced Elements collection is comprised of a selection of plank and herringbone boards with easy to fit Uni-Clic and Uni-Drop systems. With a chalky colour palette and SoftGrain embossing, Elements has a contemporary look and feel.

- + Integrated underlay
- + SoftGrain embossing
- + 36 PTV Rating (Wet)
- + New wider board



PLF5206CH Actinium Oak



Plank
1220 x 228 x 5mm



SoftGrain




Sound
Reduction
Rating



Year
Residential
Guarantee



Year
Commercial
Guarantee



Herringbone (CH)
750 x 150 x 5mm

Scan for more
information or call
us on **01524 481 118**





PLF5201 Nickel Oak



PLF5202 Mercury Oak



PLF5203 Iron Oak




PLF5204 Calcium Oak




PLF5205 Uranium Oak



**PLF5206 Actinium
Oak**




PLF5207 Copper Oak



PLF5201CH Nickel Oak




PLF5203CH Iron Oak



**PLF5204CH Calcium
Oak**




**PLF5206CH Actinium
Oak**




**PLF5207CH Copper
Oak**



Nickel Oak



PLF5201 Nickel Oak

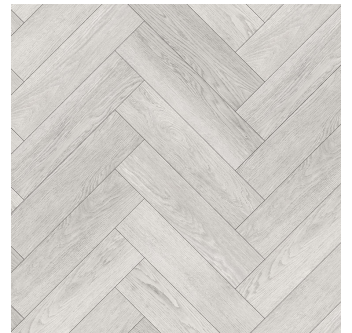


PLF5201CH Nickel Oak



Iron Oak

PLF5203 Iron Oak

PLF5203CH Iron Oak

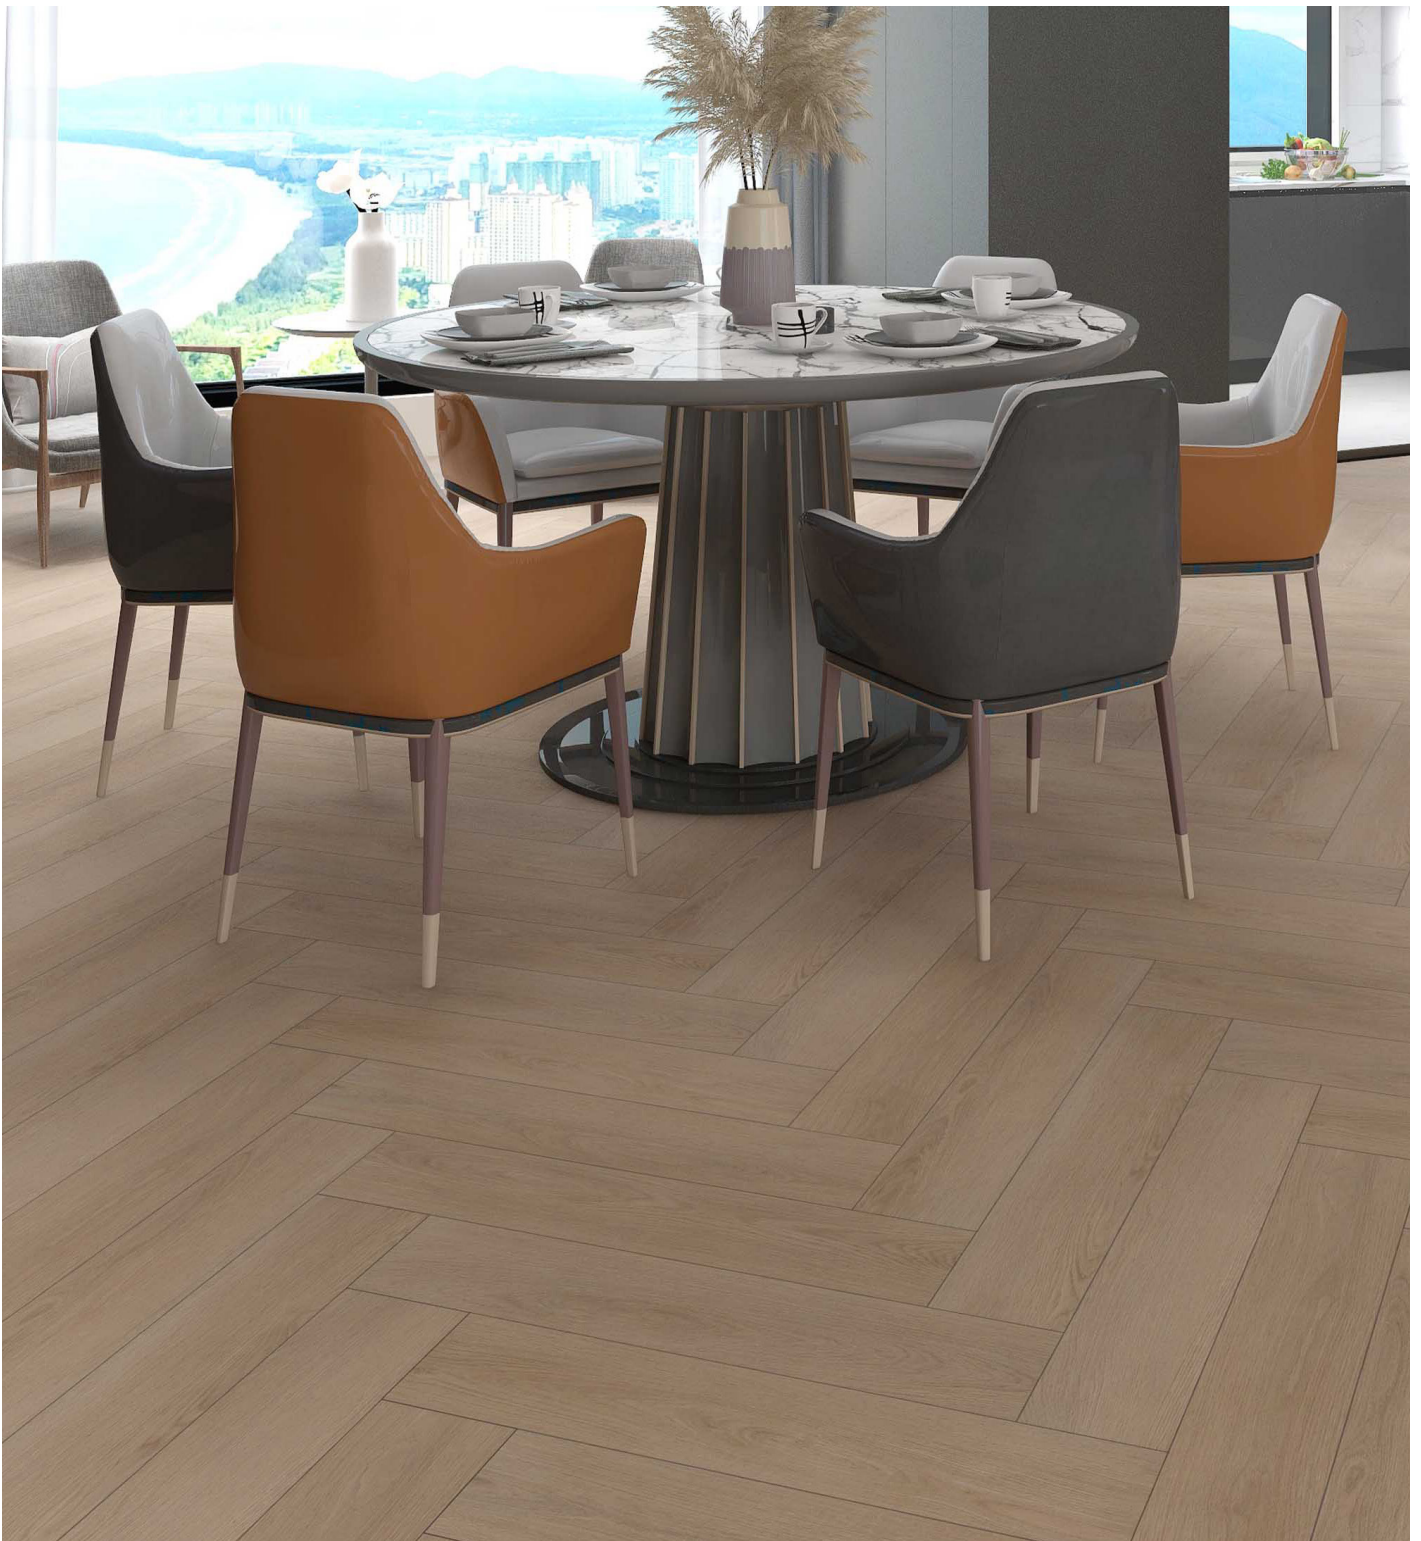

Calcium Oak




PLF5204 Calcium Oak

PLF5204CH Calcium Oak





PLF5206 Actinium
Oak




PLF5206CH Actinium
Oak

Actinium Oak



Copper Oak



PLF5207 Copper Oak



PLF5207CH Copper Oak



PLF5202 Mercury Oak

Mercury Oak



PLF5205 Uranium Oak



Uranium Oak

Vinyl Elements

Product

Format(s)	Plank, Herringbone	
Fixing	Click-lock	
Finish	SoftGrain embossing	
Profile	Uni-Clic (Plank) Uni-Drop (Herringbone)	
Edge	Bevelled	
Wear Layer	0.3mm	
Pack size	Plank	2.5m ²
	Herringbone	1.8m ²

Technical

Antibacterial	ISO2216	
Dimension Stability	TS EN ISO 23999	Class 34
Electrostatic Behaviour	1815:2016	Antistatic floor covering
Formaldehyde Group	EN 717-1:2004	E1
Fire Behaviour	EN13501-1 EN9239-1:2010	BFL-S1
Floor Heating System	Suitable	Max. 27°C
Phatalate Analysis	Inhouse method	Phatalate free
Reaction to Fire	EN 11925-2:2020	B-S1-D0
Residual indentation	TS EN ISO 2434-1:2007	0.01mm
Slip Rating	EN13893	36PTV (when wet)
Surface Treatment (UV)	Yes	
Thermal Resistance	EN12667	0.296 W/(m.K)
Thickness in Total	ISO24337	5mm
Thickness of Wear Layer	EN429	0.3mm
Underlay	IXPE	1mm
Weight in Total	EN ISO 23997	8.0 kgs/sqm
Performance Classification	23, 34, 43	
Warranty (Years)*	20 (Residential) 5 (Commercial)	
Sound Reduction	19 db lw (including underlay)	

PlusFloor®

01524 481 118
info@plusfloor.com
plusfloor.com

London Showroom
66a Turnmill Street
Clerkenwell
London, EC1M 5RR

Innovation + Distribution Centre
11 Oakwood Way
Carnforth Business Park
Carnforth, LA5 9FD