

PlusFloor®

Vinyl
Elements



Elements


Click Lock Vinyl Plank and Herringbone

Inspired by Medeleev's periodic table, our enhanced Elements collection is comprised of a selection of plank and herringbone boards with easy to fit Uni-Clic and Uni-Drop systems. With a chalky colour palette and SoftGrain embossing, Elements has a contemporary look and feel.


- + Integrated underlay
- + SoftGrain embossing
- + 36 PTV Rating
- + New wider board



PLF5206CH Actinium Oak



Plank
1220 x 228 x 5mm



Herringbone (CH)
750 x 150 x 5mm



SoftGrain



Sound
Reduction
Rating




Year
Residential
Guarantee



Year
Commercial
Guarantee

Scan for more
information or call
us on **01524 481 118**





PLF5201 Nickel Oak



PLF5202 Mercury Oak



PLF5203 Iron Oak




PLF5204 Calcium Oak




PLF5205 Uranium Oak



**PLF5206 Actinium
Oak**

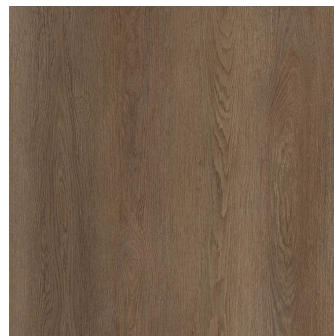


PLF5207 Copper Oak

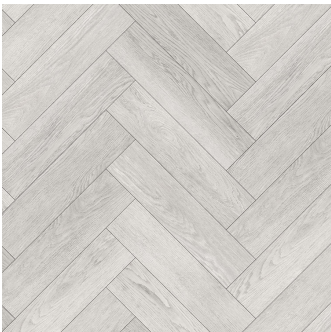

PLF5201CH Nickel Oak




PLF5203CH Iron Oak

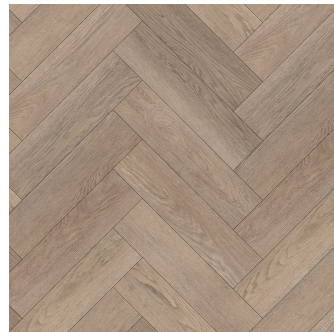

**PLF5204CH Calcium
Oak**




**PLF5206CH Actinium
Oak**

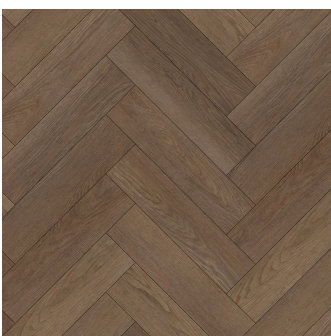


**PLF5207CH Copper
Oak**



Nickel Oak

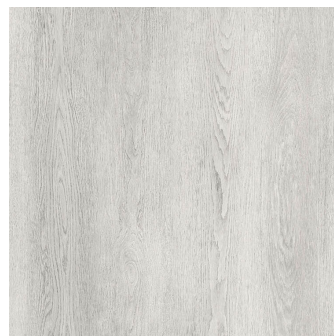

PLF5201 Nickel Oak

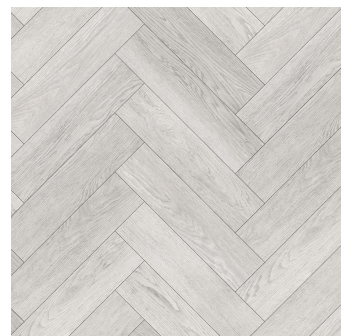


PLF5201CH Nickel Oak



Iron Oak

PLF5203 Iron Oak

PLF5203CH Iron Oak

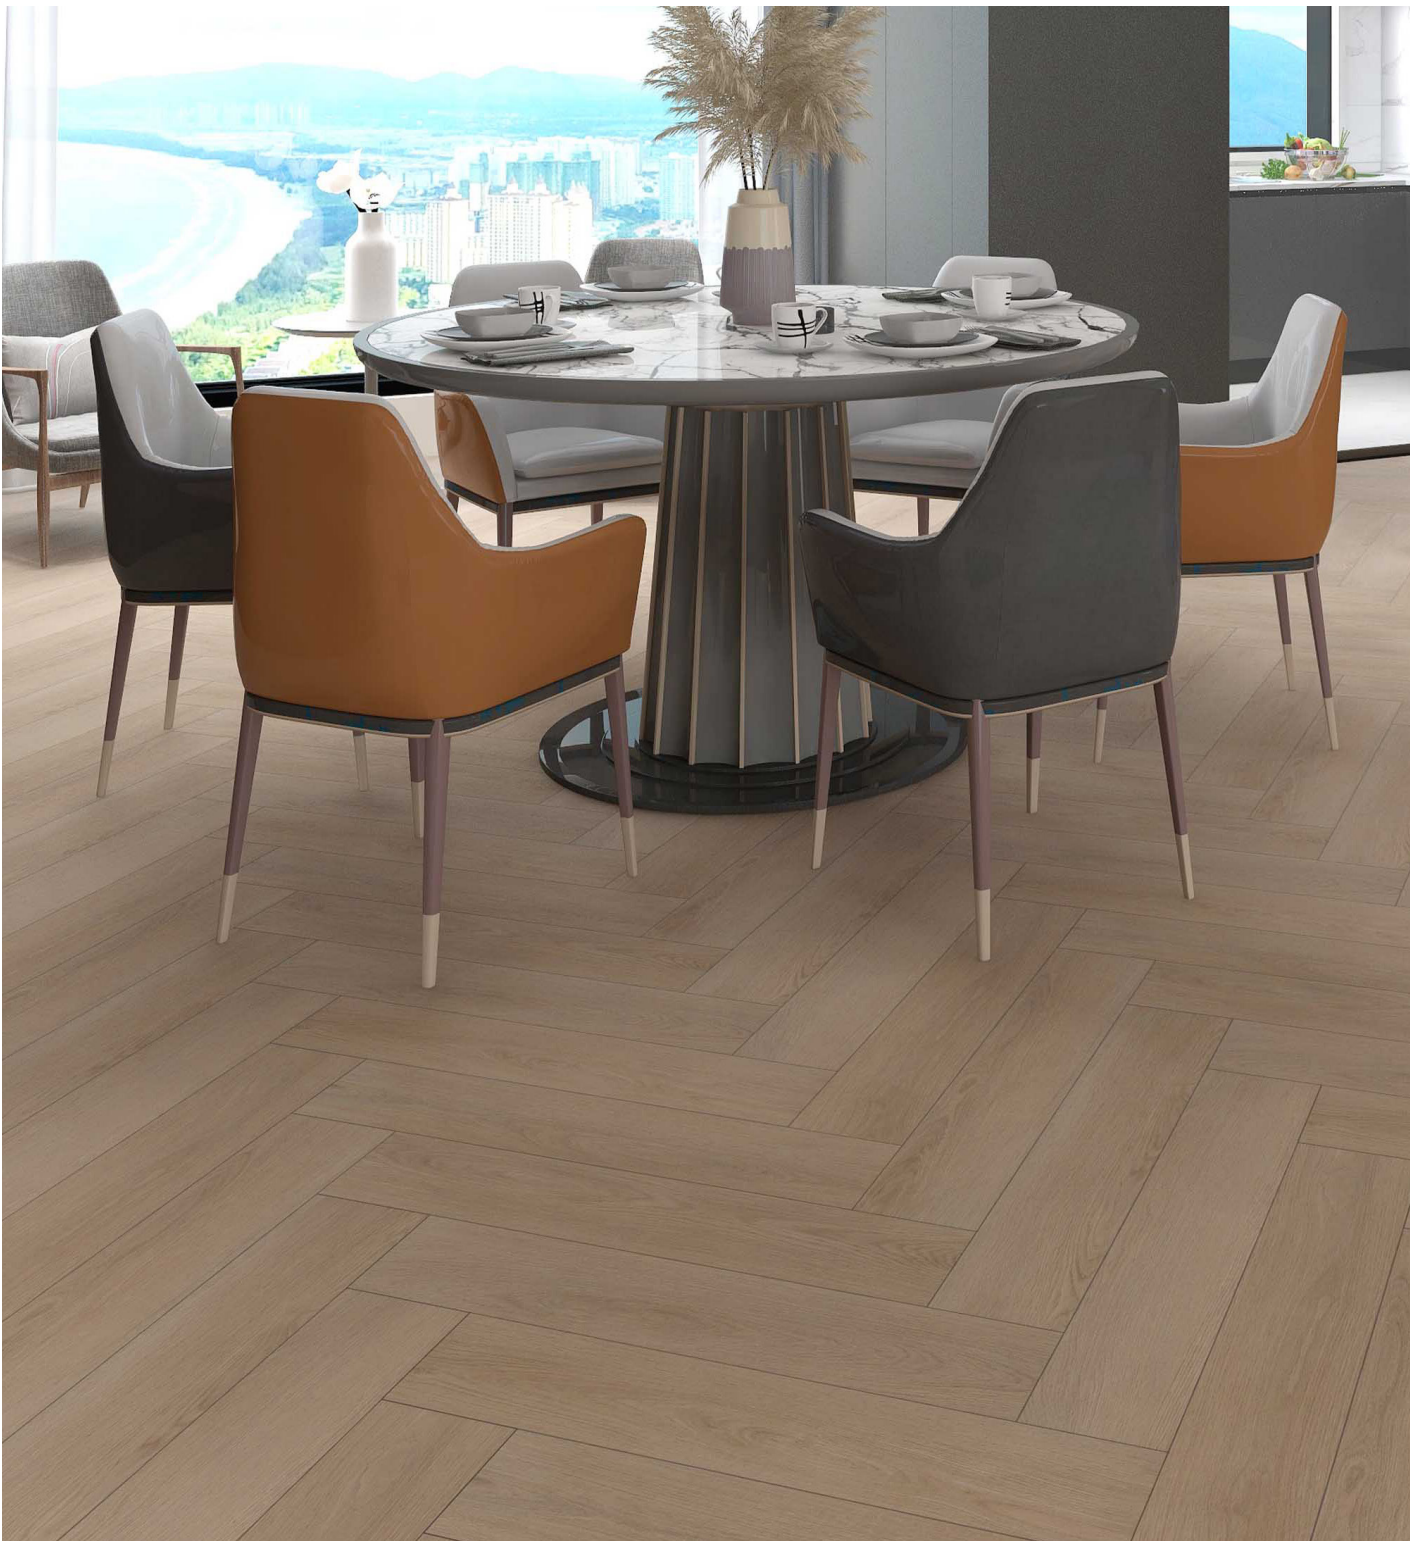

Calcium Oak



PLF5204 Calcium Oak

PLF5204CH Calcium Oak





PLF5206 Actinium
Oak




PLF5206CH Actinium
Oak

Actinium Oak



Copper Oak

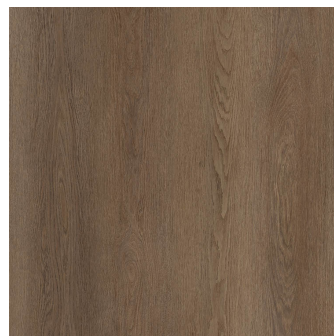

PLF5207 Copper Oak



PLF5207CH Copper Oak



PLF5202 Mercury Oak

Mercury Oak



PLF5205 Uranium Oak



Uranium Oak

Vinyl Elements

Product

| | | |
|------------|---|-------------------|
| Format(s) | Plank, Herringbone | |
| Fixing | Click-lock | |
| Finish | SoftGrain embossing | |
| Profile | Uni-Clic (Plank) Uni-Drop (Herringbone) | |
| Edge | Bevelled | |
| Wear Layer | 0.3mm | |
| Pack size | Plank | 2.5m ² |
| | Herringbone | 1.8m ² |

Technical

| | | |
|----------------------------|---------------------------------|---------------------------|
| Antibacterial | ISO2216 | |
| Dimension Stability | TS EN ISO 23999 | Class 34 |
| Electrostatic Behaviour | 1815:2016 | Antistatic floor covering |
| Formaldehyde Group | EN 717-1:2004 | E1 |
| Fire Behaviour | EN13501-1 EN9239-1:2010 | BFL-S1 |
| Floor Heating System | Suitable | Max. 27°C |
| Phatalate Analysis | Inhouse method | Phatalate free |
| Reaction to Fire | EN 11925-2:2020 | B-S1-D0 |
| Residual indentation | TS EN ISO 2434-1:2007 | 0.01mm |
| Slip Rating | EN13893 | 36PTV |
| Surface Treatment (UV) | Yes | |
| Thermal Resistance | EN12667 | 0.296 W/(m.K) |
| Thickness in Total | ISO24337 | 5mm |
| Thickness of Wear Layer | EN429 | 0.3mm |
| Underlay | IXPE | 1mm |
| Weight in Total | EN ISO 23997 | 8.0 kgs/sqm |
| Performance Classification | 23, 34, 43 | |
| Warranty (Years)* | 20 (Residential) 5 (Commercial) | |
| Sound Reduction | 19 db lw (including underlay) | |

PlusFloor®

01524 481 118
info@plusfloor.com
plusfloor.com

London
Showroom
23 Pear Tree Street
Clerkenwell
London, EC1V 3AP
Innovation + Distribution Centre
11 Oakwood Way
Carnforth Business Park
Carnforth, LA5 9FD