

# Much more than an eyepiece HYPERION®-eyepieces

How to use the modular eyepiece system – illustrated instructions for the whole range of Hyperion accessories



Free case with purchase of 7pc eyepiece set

Individually packaged Hyperion eyepieces:



Scope of supply for each Hyperion 68°-eyepiece (1-5):

1 dual 2" and 1 1/4" nosepiece

2 Soft-leather bag provides perfect protection – takes very little space

3 1 1/4" (31,7mm) Ø Dust Cap

4 68° Hyperion eyepiece with Phantom-Group® Coating and two Photo-threads M 43 and SP 54

5 Two end dust caps with inner diameters of 48mm and 45mm

## End dust caps

All Hyperion eyepieces are equipped with two dust caps which protect the eye lens side. This leaves you the choice of storing the eyepiece protected from dust with rubber eye cap folded down (especially for persons who wear glasses) or folded up.

## System-threads M 43 and SP 54

The Hyperion threads are located beneath the rubber eye cap, or rather beneath the thread-protecting ring (made of high-quality, non-aging silicone rubber). The large number of Baader adapter rings allows use of the Hyperion eyepiece for (almost) every task in astronomical – and nature – photography as a high-quality projection optic or as a tele-extender.

The following pages describe in detail many of the adaptations and variations that are possible with the Hyperion system.



1 1/4" barrel with captive groove and filter thread, suitable for all 1 1/4" eyepiece-filters, as well as for the Baader 1 1/4" extension tube (#1905130)



1 System thread M43



2 System thread SP54

## Variable focal lengths with the Hyperion 2" finetuning rings (FTR) 14 and 28 mm



Hyperion eyepiece with FTR 14 and 28 mm

Hyperion eyepiece with FTR 14mm (this combination is also portrayed in the picture below which features the 2" mirror star diagonal)

### Available combinations of Hyperion eyepieces with Finetuning Rings or 2" Baader Filter to modify the focal length and the field of view.

	Effective focal length in mm	Field-stop mm	with 14 mm FTR	with 28 mm FTR	with 14 + 28 mm FTR	with 2" Baader Filter*	without first group of lenses
Hyperion**	24.0	28.0	--	--	--	--	--
Hyperion	21.0	22.5	17.6	19.9	15.5	17.5	14.0
Hyperion	17.0	20.9	13.1	17.1	10.8	14.1	9.2
Hyperion	13.0	17.7	10.8	14.6	9.2	12.5	8.1
Hyperion	10.0	15.0	8.4	11.6	7.1	9.8	6.1
Hyperion	8.0	10.7	6.0	8.6	5.0	7.1	4.3
Hyperion	5.0	6.5	4.0	5.4	3.2	4.5	2.6



Hyperion eyepiece with built-in 2" eyepiece filter (e.g. Infrared-Blocking-Filter # 2459210 A)

A variety of additional Hyperion focal lengths can be obtained at very moderate prices by using our 2" Finetuning Extension Rings 14 and 28 mm, or even our 2" eyepiece filters. Thus an eyepiece of 5 mm focal length can be converted into one of 2.6 mm focal length – without loss of sharpness – above all, because no additional lenses are introduced into the beam, which is unavoidable when using a Barlow lens.

For marginal cost such experimentation is possible. You will discover how much your telescope can achieve, exceeding the recommended range of magnification without an additional Barlow lens. You will experience surprising results especially with refractors. With real apochromats the usable exit pupil may be considerably smaller than the literature recommends!

\* Baader 2" eyepiece filter with a height of 8 mm. Yellow column of the table: focal length, Light-Grey column: diameter of the field stop  
\*\* non variable focal length

Hyperion eyepiece with 1 1/4" barrel unscrewed

Finetuning 2" Extension ring 28 mm # 2958228

Finetuning 2" Extension ring 14 mm # 2958214

2" Stop ring with captive brass locking ring and two locking screws # 2958027

Front Hyperion lens element, built into the 1 1/4" barrel.



Hyperion eyepiece

2" Stop ring #2958027

Finetuning ring 14 mm #2958214

1 1/4" Hyperion barrel with built-in negative lens group


The M48 filter thread is located here!

To remove the first group of lenses, all Hyperion eyepieces must only be opened here (exception 24 mm). Disassembling the eyepiece elsewhere will void the warranty!

Combination of the Hyperion eyepiece and the 14 mm Finetuning Ring as well as the 2" stop ring

The stop ring prevents the eyepiece barrel from hitting the mirror star diagonal or prism.

## Adaption of the Hyperion-eyepiece to the Zeiss Diascope spotting scope

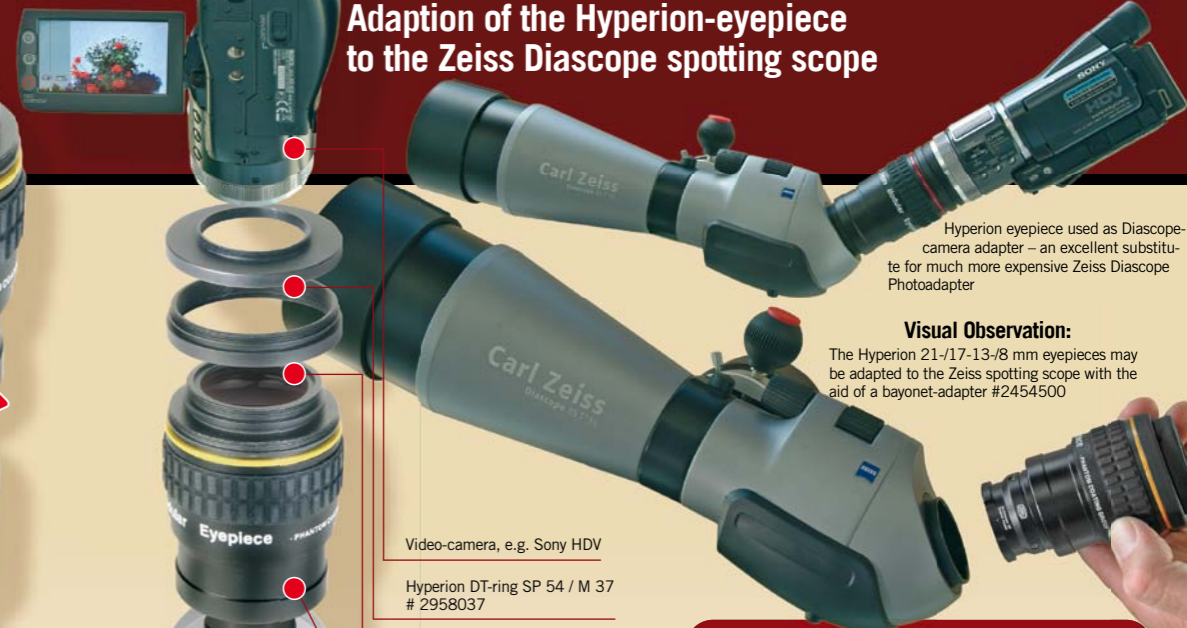

Hyperion eyepiece used as Diascope-camera adapter – an excellent substitute for much more expensive Zeiss Diascope Photoadapter

### Visual Observation:

The Hyperion 21-/17-/13-/8 mm eyepieces may be adapted to the Zeiss spotting scope with the aid of a bayonet-adapter #2454500

Video-camera, e.g. Sony HDV

Hyperion DT-ring SP 54 / M 37 # 2958037

Hyperion extension DT-ring 11 mm SP 54i / SP 54 a # 2958090

Hyperion eyepiece

1 1/4" Baader Diascope bayonet-adapter # 2454500 with built-in captive brass locking ring – slipped over and fastened onto the chromium-plated eyepiece barrel

Carl Zeiss Diascope 85 T\*FL

more information: [www.hyperion-okulare.de](http://www.hyperion-okulare.de)

### ... and if everything fails...

... for instance – if you want to use a small digital camera without lens thread for afocal projection-photography... why not use our

**Baader-Microstage II Digiscoping Adapter (#2450330) – it will solve all adaptation problems!**

The Baader Microstage II enables camera adaptation onto almost any telescope, spotting scope and many binoculars.

The camera support arm rotates to the side for visual aiming (with Clickstop action!). Camera remains completely adjusted and is ready for shooting the image when the support arm is clicked back into working position.

The whole family of Hyperion 68° eyepieces:



5 mm #2454605

8 mm #2454608

10 mm #2454610

13 mm #2454613

17 mm #2454617

21 mm #2454621

24 mm #2454624



# BAADER PLANETARIUM™

Zur Sternwarte • D-82291 Mammendorf • Tel. +49 (0) 81 45 / 88 02 • Fax +49 (0) 81 45 / 88 05  
Baader-Planetarium.de • kontakt@baader-planetarium.de • Celestron-Deutschland.de

We reserve the right for errors and technical changes • Illustrations may differ slightly from the original • Copyright by Baader Planetarium GmbH • Layout by MB-GRAFIK-DESIGN.  
The terms Astro F-2 System® and Hyperion® are copyrighted. Any Use of our brand-names, copying or commercially using our sales-material without our expressive authorisation will be prosecuted.  
We reserve all rights.

# Hyperion eyepieces classical eyepiece projection

M43/T-2 adapter ring # 2958080 fits the smaller M43 system thread of the Hyperion eyepiece. Thus every Hyperion eyepiece can be used as a classical projection eyepiece. The whole range of adapter rings of our Baader Astro T-2 System® for moon- and planetary photography is available for this purpose. With eyepieces of 5 and 8 mm focal length, highest projection magnifications are easily attained.



**M43/T-2 Adapter # 2958080**

**Adapter system SP 54 –for afocal projection:**

The Hyperion DT-rings SP 54 are optimized to provide the shortest possible distance between the eye lens of the digital camera lens. Only in this way is a fully illuminated photographic field possible without vignetting




2 adjustment Spacer Rings made of hard plastic for the SP 54 thread are part of each Hyperion DT-ring free of charge. With these spacer rings (each ring has a thickness of only 1 mm), differences in mechanical heights may be adjusted, to be able to adapt the camera front lens as close as possible, without having to use the 11 mm Extension ring (# 2958090). Caution when mounting the camera! Camera-front lenses may be too close to the first lens of the Hyperion eyepiece only by a tenth of a millimetre. When mounting the Hyperion-eyepiece onto any camera-front-lens, always proceed with the greatest care, possibly using the additional Spacer rings.

Using SP 54 connecting rings, the objective of the camera and the Hyperion eyepiece may be connected with a minimum of separation distance.

# Hyperion eyepieces afocal projection with DSLR-cameras


All adaptation requires careful handling. Before connecting the eyepiece tightly to the camera, please make sure that the lens surface of the camera lens is not touched or scratched by any part of the eyepiece.

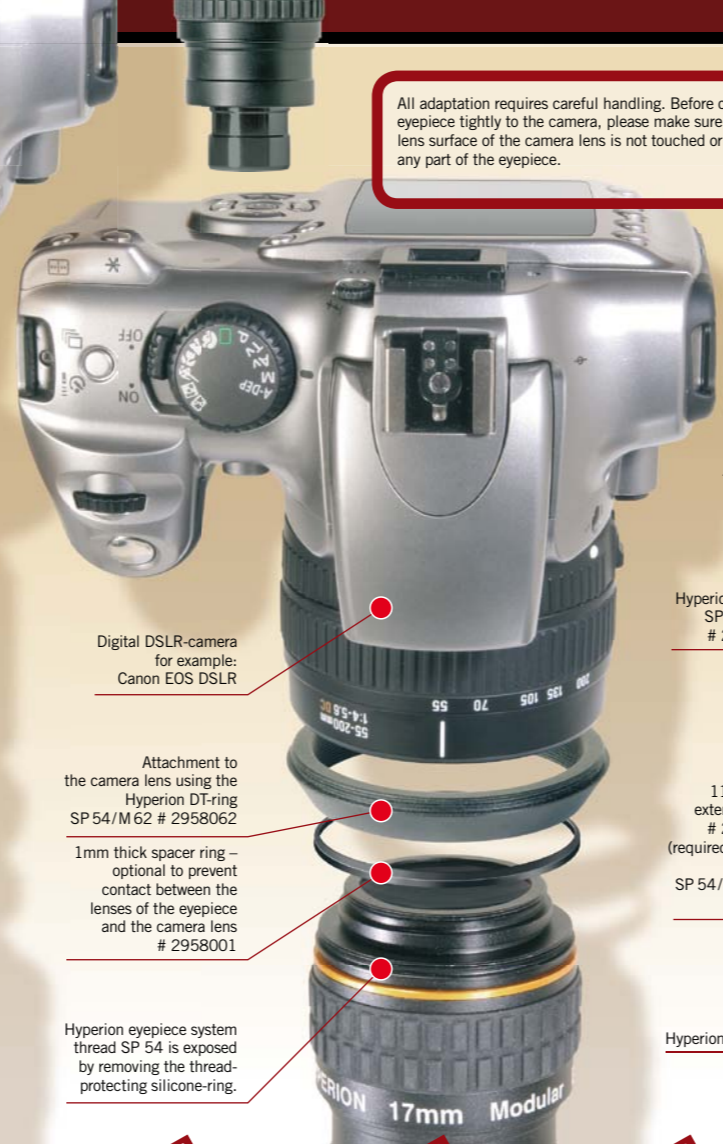

# Hyperion eyepieces afocal projection with video-cameras

**Recommendation:**

The eyepiece should only be used without the first group of lenses for the purpose of afocal eyepiece projection imaging. The camera's field of view will be increased without a noticeable loss of edge sharpness. In visual observation, however, a loss of edge sharpness will be experienced when using the eyepiece without the first group of lenses.

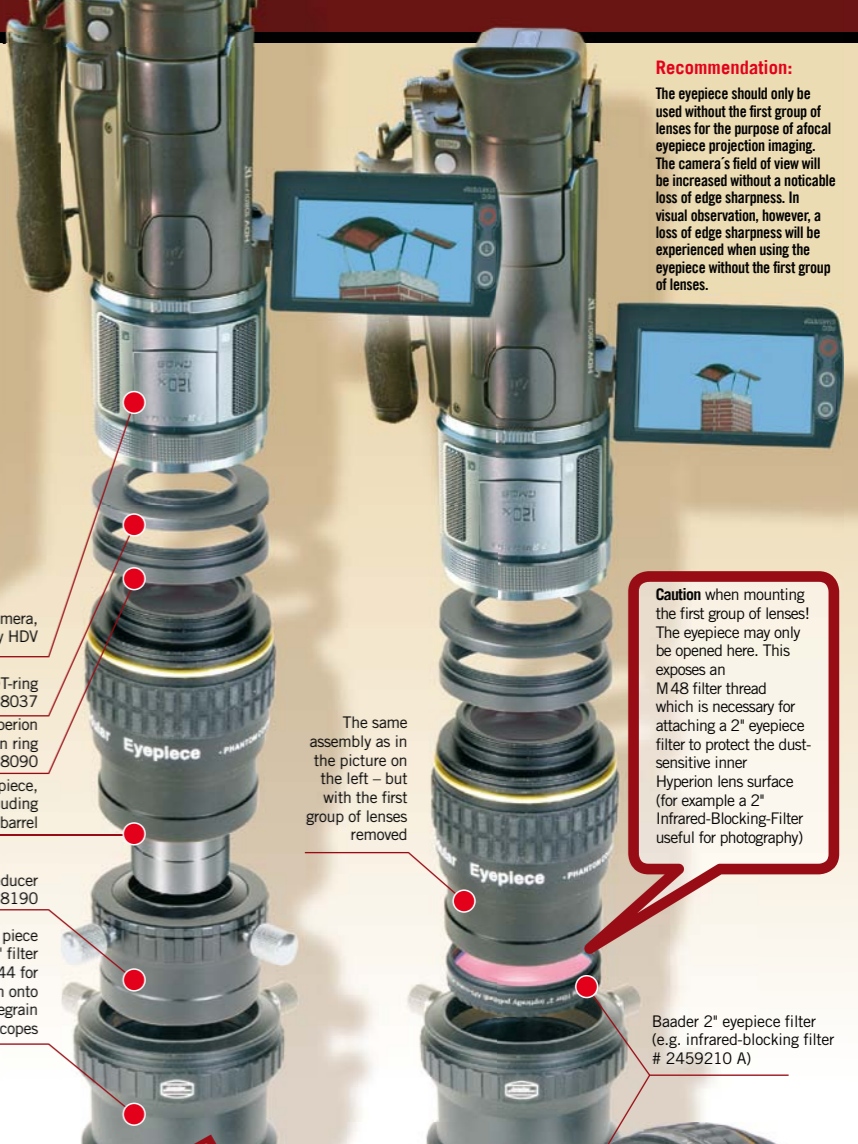

Please consult our Astro-accessory list to find further adapter rings, including the Astro T-2 System®.