



Catalogue
CATERING
Chapter
DISHWASHING

Model
CCO-120 D CW 400V 3N 50Hz

19046527

12/04/2019


CONVEYOR DISHWASHER CCO-120 D CW

All the main parts are manufactured in AISI-304 anti-corrosion stainless steel: tanks, washing and rinsing arms, rinsing jets, doors, basket conveyance system, boiler and metal tubes.
 Upwards-opening double panel door.
 Tank tray filters made of AISI-304 stainless steel, easy to access and remove for cleaning and access to the tank.
 Safety filter for pump suction.
 Rinsing boiler with heat insulation.
 Easy access for installation. Electrovalve located on one side (no need to remove panels to connect the machine).
 Electrical panel designed for easy connection of dosers for liquid and solid detergents, rinse aid, limit switches, supplementary emergency stop button.
 Washing arms easily removable as a set, for cleaning, with a plug on each branch providing access for cleaning inside.
 Rinse jets easily dismountable and removable.
 System of electronic regulation of speeds by means of frequency shifter.
 Configurable electronic temperature control:
 - Wash (50 - 65 °C)
 - Rinse (70 - 85 °C)
 Guarantor of rinse at 85 °C.
 Pressure regulator for flow control.
 Emergency stop button incorporated.
 Extra anti-entrapment protection system at the entrance, mounted on the AS-260 splash guard supplement (optional).
 Open door blocking system.
 IPX4 protection system.
 System for detection of blockage of conveyor carriage and automatic reverse function.
 High-power washing system with 4 upper and 4 lower washing branches.
 3 washing programs: deep, medium and high capacity.
 Double effect rinse.
 Energy-saving system: reduces consumption by halting operation of the pumps, and by passing the heating of the rinse to stand-by mode (70 °C).
 Auto-timer which deactivates the conveyor motor after a pre-set period of inactivity (10 minutes).
 Energy saving system in the wash: the wash does not start up until it detects the passage of the basket.
 Rinse saving system. The rinse stops when the basket has left, saving water and energy.
 Model prepared for entrance of baskets from the right side.
 Model prepared for a cold water connection inlet (Inlet temperature < 50°C)

Equipment included:

2 base baskets, CT-10
 2 baskets for plates CP-16/18, 1 basket for glasses CV-16/105, 1 basket for cutlery CT-10 R
 Limit switch included.

DIMENSIONS



| | | | |
|------------|----------|----------------|----------|
| X Width | 1180 mm | X Gross width | 1530 mm |
| Y Depth | 790 mm | Y Gross depth | 955 mm |
| Z Height | 1560 mm | Z Gross height | 1950 mm |
| Net Weight | 211,0 kg | Gross Weight | 306,0 kg |
| Net volume | 2,225 m3 | Gross volume | 2,849 m3 |

ELECTRICITY TECHNICAL SPECIFICATIONS

| | |
|--------------------|-----------|
| Electric power | 28,550 kW |
| Heating power | 27,00 kW |
| Voltage | 400V - 3N |
| Amperage | 46,9 |
| Electric frequency | 50Hz |

WATER TECHNICAL SPECIFICATIONS

| | |
|-----------------------|-------------------------|
| Pressure | H2O: 200-400kPa(2-4bar) |
| Water max consumption | 210,00 L/h |

CONNECTIONS TECHNICAL SPECIFICATIONS

| | |
|---------------------------|----------------|
| 230 V three-phase wiring | 3X25+T - 100 A |
| Three-phase +N 40V wiring | 4X16+T - 63 A |
| Hot diameter diameter | 3/4" |
| Drain 1 diameter | 38 |




Catalogue
CATERING

Chapter
DISHWASHING

Model
CCO-120 D CW 400V 3N 50Hz

19046527

12/04/2019

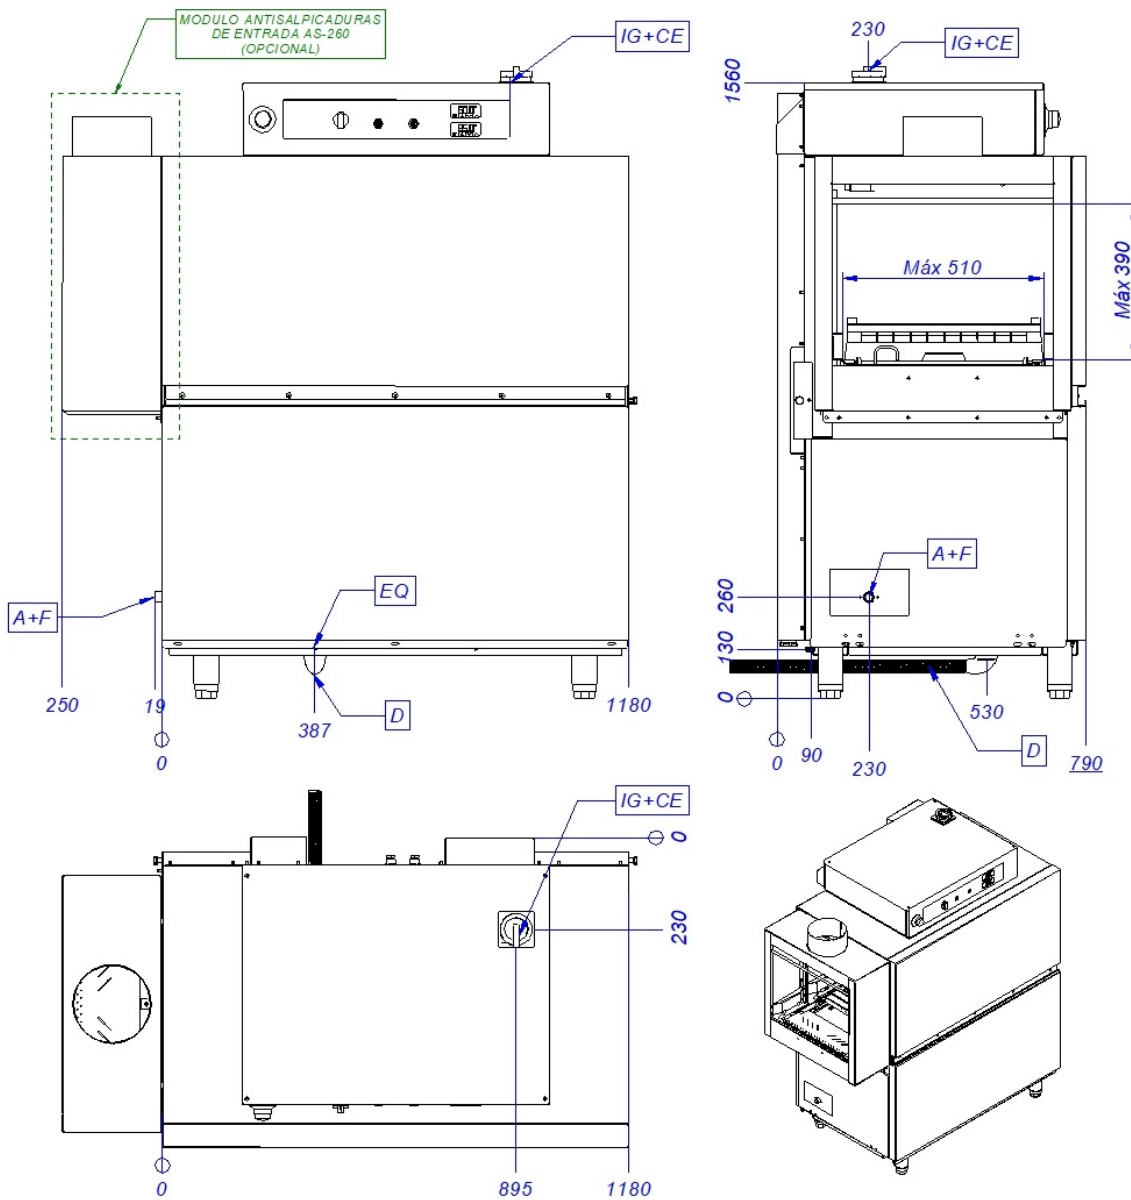

| | | | |
|-----|--------------------------|--------------------------------|---------------------------|
| A+F | Entrada de agua + filtro | Water inlet & filter | Arrivée d'eau et filtrer |
| CE | Alimentación eléctrica | Power supply | Connexion électrique |
| D | Desagüe | Drain | Vindage |
| EQ | Toma equipotencial | Equipotential bonding terminal | Connexion Équipotentielle |
| IG | Interruptor general | General switch | Interrupteur général |