

ecomax plus
by **HOBART**

DISHWASHER
F515



made in germany

ECOMAX PLUS F515 DISHWASHER

ecomax plus
by **HOBART**

Due to the high wash power, the double-walled housing and the robust filter systems, it is the quiet and resource-saving solution for your busy workday life.

Dishwasher ecomax plus F515

Cycle times*	60 / 120 / 180 sec.
Capacity per hour*	up to 60 racks
Wash/rinse temperature	approx 60° C / approx 82°C
Tank capacity	10.6 l
Fresh water consumption/rack	2.3 l
Wash pump	0.6 kW
Heating booster/tank	6.2 (2.1**) kW / 0.8 kW
Total loading	7.7 (2.9**) kW 15 A
Rated voltage	415/50/3N
Width/Depth/Height	600/600/825 mm
Loading height	425 mm
Rack size	500 x 500 mm

*hot water connection **with 240V/50Hz/1/N

The installation of machines with integrated water softener requires a back flow safety device (at site) according to DVGW-DIN 1988
Line pressure required: 0.8 to 6 bar


PRODUCT ADVANTAGES

- Electronic control with digital temperature indication
- Flat surface of control panel
- 3 selectable wash cycles
- Rotating top and bottom wash system to distribute the wash water evenly over the dishes
- Indented nozzles prevent blocking
- Thermostop-function for guaranteed rinse temperatures
- Integrated self-cleaning cycle
- Stainless steel rinse arm and housing
- Removal of rinse arms without any tools
- Easy access to all parts
- Deep-drawn wash tank
- Double-walled housing and heat insulated front door
- Tank strainer, coarse filter and pump suction casing
- Door damping control
- Loading height above average: 425 mm, for easy loading of large plates
- Fully equipped with detergent and rinse aid dispenser, rinse pressure pump and drain pump

plus

STANDARD EQUIPMENT

- Plate rack P-18-12
- Universal flat rack B-00-07
- Plastic cutlery rack with 4 boxes 01-246175-1
- Heater with thermostat control
- Electric cable, flexible water supply hose and drain hose
- Rear panelling

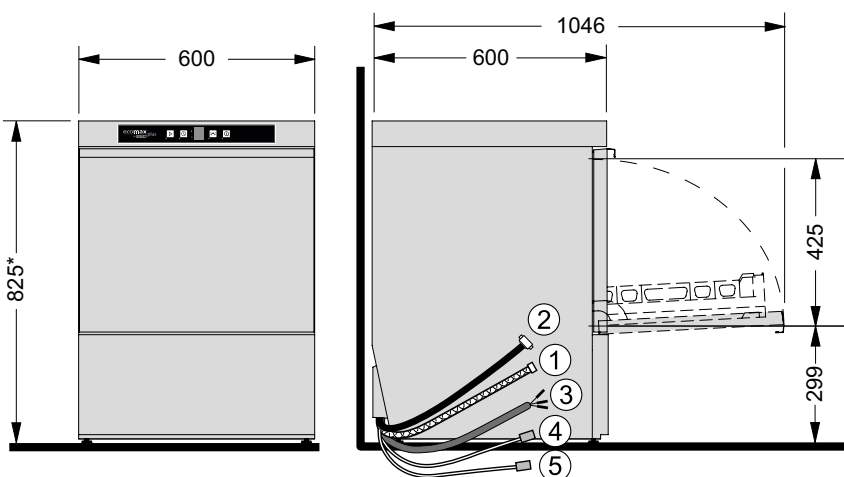

* + 40 mm adjustable feet

CONNECTIONS

① Drain hose	2,000 mm ID20/OD25
RO-IV / RO-S	Independent gravity waste to tundish
② Supply hose	2,000 mm R 3/4"
Flow pressure	0.5 (0.8 with softener)-6 bar
Max. supply water temperature	60°C 35°C with RO
Required flow rate	5 l/min
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm

A registered trademark of HOBART GmbH · Member of the ITW Food Equipment Group Europe

HOBART | 1/2 Picken St, Silverwater NSW 2128 | Phone: 1800 462 278 | sales@hobartfood.com.au | www.hobartfood.com.au