


## **GS 50 T**



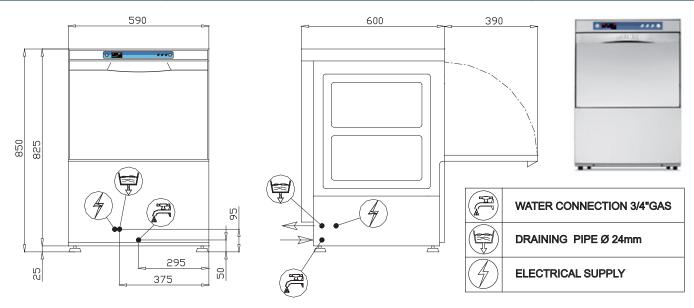

TECHNICAL DATA	STANDARD			
EXTERNAL DIMENSIONS				
width	590 mm			
depth	600 mm			
height	850 mm			
WEIGHT	56 kg			
VOLTAGE	240V 50Hz			
POWER REQUIRED	3700 W			
WATER HARDNESS	2-8 °F			
INLET WATER PRESSURE	200 - 400 kPa			
CROCKERY DIMENSIONS				
plates diameter	345 mm			
dishes max. height	320 mm			
RACK DIMENSIONS	500 x 500 mm			
RACK EQUIPMENT	1 x plate basket - 1 x mesh basket - 1 x cutlery container			
WASHING CYCLES (secs)	1(60)	2(90)	3(120)	4(180)
WATER SUPPLY 55°C				
rack/h(*)(1)	60	40	30	20
WATER SUPPLY 10°C				
rack/h(*)(1)	20	20	20	20
WATER CONSUMPTION / CYCLE	2.3 L			
(water pressure 200kPa)	2.3 L			
BOILER CAPACITY	5.7 L			
BOILER HEATING ELEMENT	3000 W			
RINSING TEMPERATURE (SET)	85 °C			
TANK CAPACITY	29 L			
TANK HEATING ELEMENT	2700 W			
TANK TEMPERATURE (SET)	55 °C			
PUMP POWER	650 W (340 L/min***)			
DRAIN PUMP (optional)	25 W h max draining 0.8 m (40 L/min***)			
NOISE	63 dB(A)			
(*) STANDARD THERMOSTOR	(***) MAYIMIIM ELOW PATE			

(\*) STANDARD THERMOSTOP

(\*\*\*) MAXIMUM FLOW RATE

<sup>1)</sup> In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash -cycle total timing might result longer than set.