

Commercial Tapware



CLEANAJET[®]
STAINLESS STEEL


Compact Exposed Wall Mount Pre-Rinse Unit



T-3M53430-C


- Full S/S construction
- Compact model designed for applications where space saving is a priority
- Equipped with a water saving 6 star 4LPM variable trigger valve
- Wall bracket included
- Fully assembled and bench tested, with a unique traceable serial number
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 80 degrees

Side




Top

Set-Out 205 Centres
Min 195 - Max 215

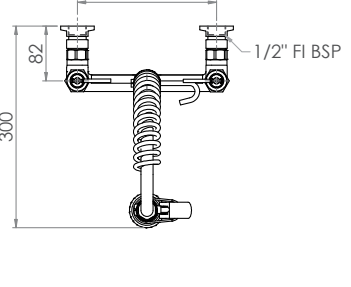

Front

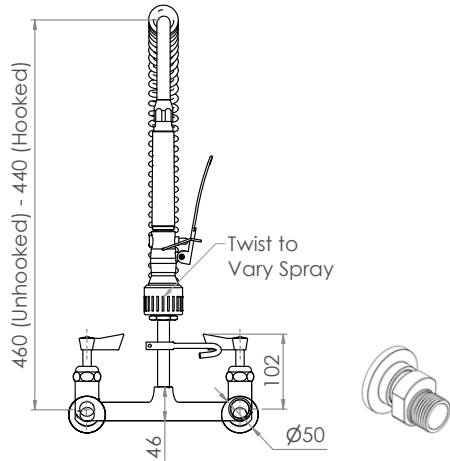

Spreader rotate to accept variations in Set-Out