

Commercial Tapware



CLEANAJET
STAINLESS STEEL

Exposed Wall Mount Pre-Rinse Unit with Pot Filler




T-3M53449 – 6" pot filler

T-3M53473 – 12" pot filler


- Full S/S construction
- Equipped with a water saving 6 star 4LPM variable trigger valve
- Available with 6" or 12" pot filler – 3 star 8LPM
- Fully assembled and bench tested, with a unique traceable serial number
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 80 degrees

Top

Set-Out 205 Centres
Min 195 - Max 215

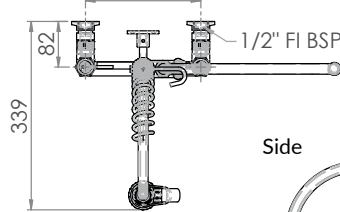

Side

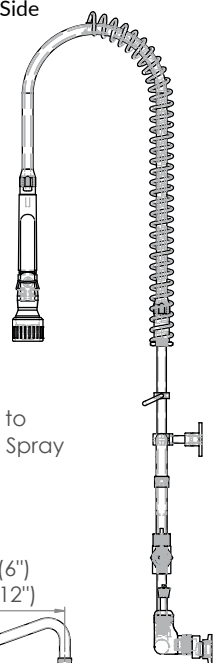

Front

