



REV.	DESCRIPTION	DATE
A	ISSUE	July/08/2009
A1	Change stopper & add EMI core.	Oct/19/2009
A2	Correct M12 pin assignment...	Oct/23/2009
A3	Change length & core overmold.	Nov/26/2009
A4	Change length.	Dec/03/2009
A5	Change length.	Dec/03/2009
B	Change length & pin.	Jan/25/2010

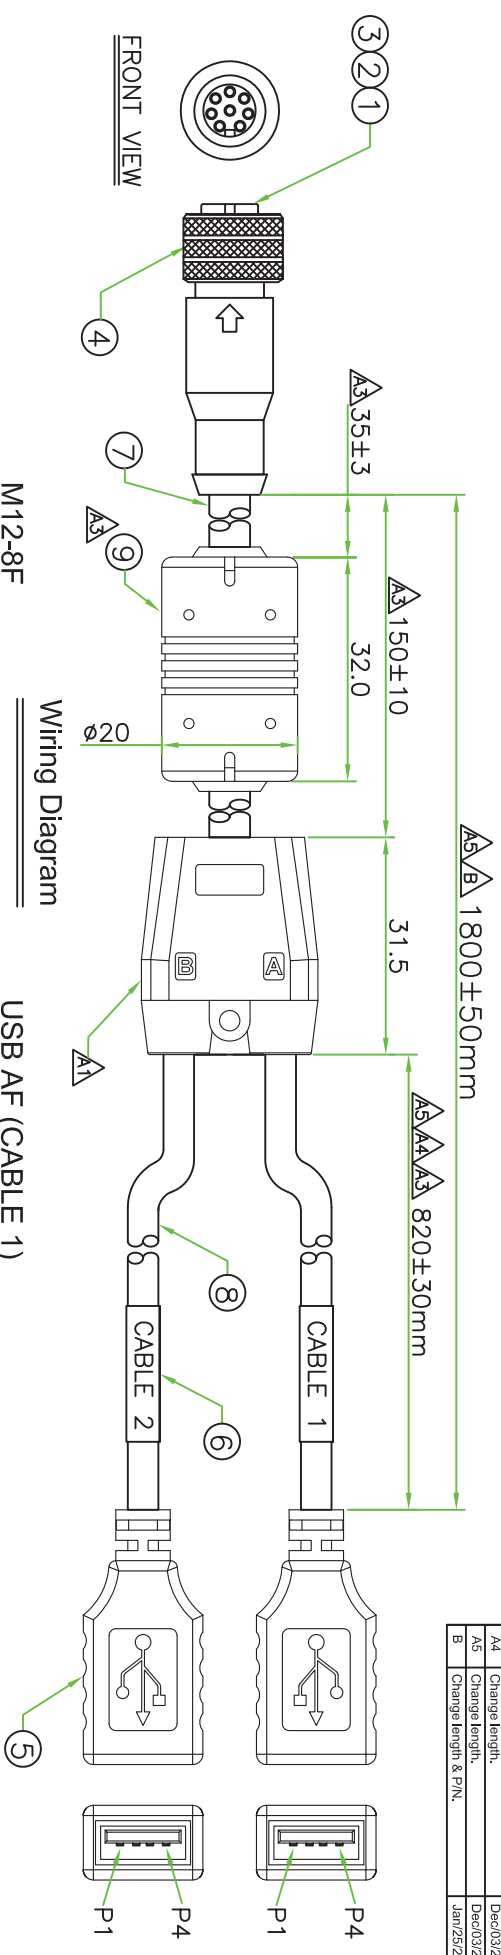

- M12-8F
- 1 _____
 - 2 _____
 - 3 _____
 - 4 _____
- SHELL _____
- USB AF (CABLE 2)
- 5 _____
 - 6 _____
 - 7 _____
 - 8 _____
- SHELL _____
- BRAID SHIELD _____
- SHELL _____

RoHS

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
9	EMI CORE	16*28*9mm.	BLACK	1	
8	CABLE	UL2725 28AWGx1P+24AWGx2C. OD: 4.5mm.	BLACK	2	
7	CABLE	UL2464 28AWGx8C+AL+DRAIN+BRAID. PVC JACKET. OD: 5.5mm.	BLACK	1	
6	LABEL	WHITE PAPER PRINTING WITH BLACK LETTER.		2	
5	USB AF	USB A TYPE FEMALE CONNECTOR.		2	
4	RING NUT	BRASS, NICKEL PLATED.		1	
3	O-RING	VITON	GREEN	1	
2	CONTACT	Brass , 6 u" Gold plated .Female Contact.		8	
1	CONNECTOR	M12 Female 8 Pin Insert. NYLON+GF.	BLACK	1	



HOLIN HTP ASIA TECHNOLOGY CO., LTD.
 禾凌科技 股份有限公司

TITLE : AXIOM USB CABLE 防水頭外部線

SCALE 1:1 UNIT: mm

UNLESS OTHERWISE SPECIFIED TOLERANCES:
 X ±0.25 XX ± 0.1
 XXX ±0.05 ANGLE ± 1dx

REV: B SHEET 1/1

P/N: 594B8122810E DR: jacck
 CH: £RJE

DWG.NO: CE-005 AP.