



## Features

- Meets EIA310c & IEC-3 specification
- 1U, Single slide rail, 17.3" LCD Keyboard drawer  
16 port PS2 or Combo KVM switch
- Built-in 17.3" LCD monitor, 1920x 1080 resolution  
Option: 17.3", 1600x 900 LCD monitor
- Industrial keyboard with touchpad
- 1U, 521mm short depth and lightweight
- 2 thumb screws to secure 17.3" LCD monitor
- Built-in rail self-locking device
- Tempered glass protect LCD screen

## KVM switch


- 16 port PS2 or Combo KVM switch
- Support password protection and server name
- Support Windows, DOS, Netware, Unix, Linux, IMAC, Power MAC and Sun Micro systems with USB
- Hot plug- add or remove connected computer without powering off the KVM switch or computer
- No software required. Easy computer selection via Front push buttons, Hot Key, OSD manu
- Firmware upgrades to all the chained KVM switch via the KVM cable connects to port 1 (Combo KVM only)
- Auto scan mode. Easy to monitor server operation
- Superior video bandwidth up to 200MHz
- LED display for status monitor
- Buzzer sound for server switched confirmation

## Specification

Model No	AMK516-PB	AMK516-CB
Construction	Heavy-duty steel	
Drawer design	1U, single slide rail LCD KB drawer for 19" cabinet	
Display	17.3", 1920x 1080 resolution with tempered glass Option: 17.3", 1600x 900 with tempered glass	
Protection	Tempered glass protect LCD screen	
Physical security	2 thumb screws to secure LCD monitor	
KVM switch	16 port PS2 KVM switch	16 port Combo KVM switch
Port connection	Daisy chain up to 8 levels to support up to 128 sets	
Port selection	16x Front push buttons, OSD Manu, Hotkey	
LED indication	Power LED indicates a computer is connecting Operation LED indicates the port has been selecting	
Keyboard	Industrial keyboard with touchpad Option KB: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US	
Power supply	Built-in 60W, 90~264VAC, Operating temp.: -20~70°C	
Power consumption	3 watts stand-by, 25 watts in-use	
Dimension	442.4x 44x 521.6mm (Wx Hx D)	
Weight	11 kgs	
KVM cable	16x 1.8m PS2 KVM cable	16x 1.8m USB KVM cable

## Environmental Factors

	Operating	Non-Operating
Temperature	0°C~50°C	-20°C~60°C
Relative Humidity	10%~90%	10%~95%
Approval	CE, FCC, RoHS	

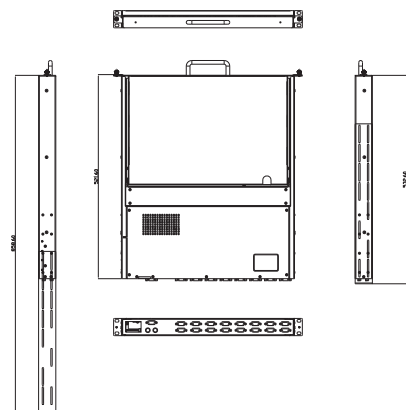

## Ordering Information

### AMK516-17PBUS

1U, 17.3", 1600x 900, 16-port PS2 KVM with 16x 1.8m PS2 cables

### AMK516-17CBUS

1U, 17.3", 1600x 900, 16-port Combo KVM with 16x 1.8m USB cables

### AMK516-17WPBUS

1U, 17.3", 1920x 1080, 16-port PS2 KVM with 16x 1.8m PS2 cables

### AMK516-17WCBUS

1U, 17.3", 1920x 1080, 16-port Combo KVM with 16x 1.8m USB cables

### Option:

80W, 24~48VDC power supply

1.8m, 3.0m, 5.0m KVM cable

Keyboard layout: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US