



**NEW**



## IGS-804SM-SE

8x 10/100/1000Base-T+ 4x 100/1000Base-X SFP with SyncE

## IGS-1608SM-SE

16x 10/100/1000Base-T+ 8x 100/1000Base-X SFP with SyncE

This series models are managed industrial grade gigabit switches with 8/16 10/100/1000Base-T ports and 4/8 Gigabit/Fast SFP ports that provide stable and reliable Ethernet transmission. They also support timing synchronization features (SyncE & IEEE 1588 PTP v2) that allow operators to deliver services with optimal stability and continuity in end to end connectivity. SyncE and IEEE1588 PTP V2 are also increasingly applied in mobile backhaul application where many devices are placed in outdoor cabinets. The switches support a variety of Ethernet functions, including STP/RSTP/MSTP/ITU-T G.8032 ERPS and multiple  $\mu$ -Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, security automation applications, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

### Feature

- 8x 10/100/1000Base-T RJ-45 and 4x 100/1000Base-X SFP Fiber with SyncE (IGS-804SM-SE)
- 16x 10/100/1000Base-T RJ-45 and 8x 100/1000Base-X SFP Fiber with SyncE (IGS-1608SM-SE)
- Redundant dual DC input power 24/48VDC (18~60VDC)
- Supports negative power input with isolated RS-232 console port (for example in telecom system)**
- UL60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- 2.25K VDC Hi-pot isolation protection for Ethernet ports and power
- Industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostic, Measuring cable normal or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power Consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 instances that each can support  $\mu$ -Ring, u-Chain or Sub-Ring type for flexible uses (see Figure 7). Supports up to 5 rings in one device (see Figure 5).
- $\mu$ -Ring for Redundant Cabling, recovery time<10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports Sync. Ethernet allow operators to deliver service with optimal stability and continuity in end-to-end connectivity
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Figure 4)
- Supports SmartView for Centralized management (Figure 3)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 device (Figure 2)

### Specifications

<b>Standard</b>	IEEE 802.3 10Base-T 10Mbit/s Ethernet	<b>VLAN ID</b>	4094 - IEEE802.1Q VLAN VID
	IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet	<b>Switch Architecture</b>	Back-plane (Switching Fabric): 24Gbps (IGS-804SM-SE), 48Gbps (IGS-1608SM-SE) Full wire-speed
	IEEE 802.3ab 1000Base-T Gbit/s Ethernet over twisted pair	<b>Data Processing</b>	Store and Forward
	IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic	<b>Flow Control</b>	IEEE 802.3x for full duplex mode Back pressure for half duplex mode
	IEEE 802.1d STP (Spanning Tree Protocol)	<b>Network Connector</b>	8x 10/100/1000Base-T RJ-45 + 4x 100/1000Base-X SFP connector (IGS-804SM-SE) 16x 10/100/1000Base-T RJ-45+ 8x 100/1000Base-X SFP connector (IGS-1604SM-SE) RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support dual speed with DDMI
	IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)	<b>Console</b>	RS-232 (RJ-45) Isolated RS-232 port grounding for negative power system, or telecom network application
	IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)	<b>Network Cable</b>	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)
	ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection Switching)	<b>Protocols</b>	CSMA/CD
	IEEE 802.1Q Virtual LANs (VLAN)	<b>Reverse Polarity Protection</b>	Present
	IEEE 802.1X Port based and MAC based Network Access Control, Authentication	<b>Overload Current Protection</b>	Present
	IEEE802.3ac Max frame size extended to 1522Bytes.		
	IEEE 802.3ad Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)		
	IEEE 802.3x Flow control for Full Duplex		
	IEEE 802.1ad Stacked VLANs, Q-in-Q		
	IEEE 802.1p LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization		
	IEEE 802.1ab Link Layer Discovery Protocol (LLDP)		
	IEEE 802.3az EEE (Energy Efficient Ethernet)		

# Industrial Managed GbE Switch with SyncE & IEEE 1588v2

<b>CPU Watch Dog</b>	Present
<b>Power Supply</b>	Redundant Dual input power (Removable Terminal Block) DC 24/48V (18~60VDC) Support negative voltage input power for telecom
<b>Power Consumption</b>	TBD
<b>LED</b>	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green)
<b>Jumbo Frame</b>	9.6KB
<b>IEEE802.3ac</b>	Max frame size extended to 1522Bytes (allow Q-tag in packet)
<b>MAC Address Table</b>	8K
<b>Memory Buffer</b>	512K Bytes for packet buffer
<b>Warning Message</b>	System Syslog, SMTP/ e-mail event message, alarm relay
<b>Alarm Relay Contact</b>	Relay outputs with current carrying capacity of 1 A @24VDC
<b>Removable Terminal Block</b>	Provide 2 redundant power, alarm relay contact, 6 Pin
<b>Operating Temperature</b>	-10 ~ 60°C (IGS-804SM-SE, IGS-1608SM-SE) -40 ~ 75°C (IGS-804SM-SE-E, IGS-1608SM-SE-E)
<b>Operating Humidity</b>	5% to 95% (Non-condensing)
<b>Storage Temperature</b>	-40 ~ 85°C
<b>Housing</b>	Rugged Metal, IP30 Protection, Fanless

<b>Dimensions</b>	TBD
<b>Weight</b>	TBD
<b>Installation Mounting</b>	DIN Rail mounting, or wall mounting (Optional)
<b>MTBF</b>	TBD
<b>Warranty</b>	5 years
<b>Certification</b>	
<b>EMC</b>	CE
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A, CE EN55022 Class A
<b>Railway Traffic</b>	EN50121-4
<b>Immunity for Heavy Industrial Environment</b>	EN61000-6-2
<b>Emission for Heavy Industrial Environment</b>	EN61000-6-4
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Safety</b>	UL60950-1
<b>Hi pot protection</b>	DC 2.25KV for power to chassis ground, Ethernet ports to chassis ground
<b>Shock</b>	IEC 60068-2-27
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC 60068-2-6

## Software Specifications

<b>Topology</b>	
<b>VLAN</b>	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR ( Multicast VLAN Registration)
<b>Link Aggregation (Port Trunk)</b>	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
<b>Spanning Tree</b>	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
<b>Multiple μ-Ring</b>	up to 5 instances that each supports μ-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. (See figure 5, 6, 7) Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
<b>Loop Protection</b>	Present
<b>ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)</b>	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
<b>QoS Features</b>	
<b>Class of Service</b>	IEEE802.1p 8 active priorities queues for per port
<b>Traffic Classification QoS</b>	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
<b>Bandwidth Control for Ingress</b>	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
<b>Bandwidth Control for Egress</b>	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
<b>DiffServ (RF 2474) Remarking</b>	
<b>Storm Control</b>	for Unicast, Broadcast, Multicast

<b>IP Multicasting Features</b>	
<b>IGMP / MLD Snooping</b>	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
<b>Security Features</b>	
<b>IEEE 802.1X</b>	Port-Based MAC-Based
<b>ACL</b>	Number of rules : up to 256 entries for L2 / L3 / L4
<b>RADIUS authentication &amp; accounting</b>	
<b>TACACS+ authentication &amp; accounting, TACACS+ 3.0</b>	
<b>HTTPS, HTTP</b>	
<b>SSL / SSH v2</b>	
<b>User Name Password Authentication</b>	Local Authentication Remote Authentication (via RADIUS / TACACS+)
<b>Management Interface Access Filtering</b>	Web, Telnet / SSH , CLI RS-232 console
<b>Management Features</b>	
<b>CLI</b>	Cisco® like CLI
<b>Web Based Management</b>	
<b>Telnet</b>	Server
<b>SNMP</b>	V1, V2c, V3
<b>SW &amp; Configuration Upgrade</b>	TFTP, HTTP Redundant firmware in case of upgrade failure
<b>RMON</b>	RMON I (1, 2, 3, 9 group), RMON II
<b>MIB</b>	RFC1213 MIB II, Private MIB
<b>UPnP</b>	
<b>DHCP</b>	Server, Client, Relay, Snooping Snooping option 82 Relay option 82
<b>IP Source Guard</b>	
<b>Port Mirroring</b>	
<b>Event Syslog</b>	Syslog server (RFC3164) (Support 1 server )
<b>Warning Message</b>	System syslog, e-mail, alarm relay
<b>DNS</b>	Client, Proxy
<b>SyncE</b>	ITU-T G.8262 Sync Ethernet
<b>IEEE1588 PTP V2</b>	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
<b>NTP, SNTP</b>	client


# Industrial Managed GbE Switch with SyncE & IEEE 1588v2

LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
<b>IPv6 Features</b>	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	
HTTP over IPv6	
SSH over IPv6	


IPv6 Telnet Support	
IPv6 NTP, SNTP	client
IPv6 TFTP Support	
IPv6 QoS	
IPv6 ACL	Number of rules: up to 256 entries L2 / L3 / L4

## Application

► **Figure 1 :** Application for mobile backhaul

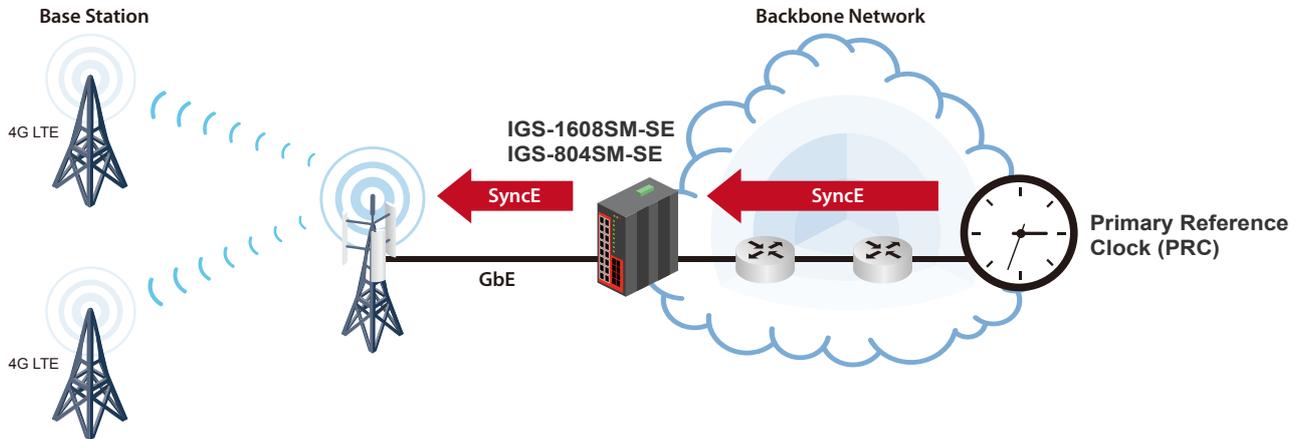


► **Figure 2 :** Central EMS allows central management of up to 50 SmartView™ servers

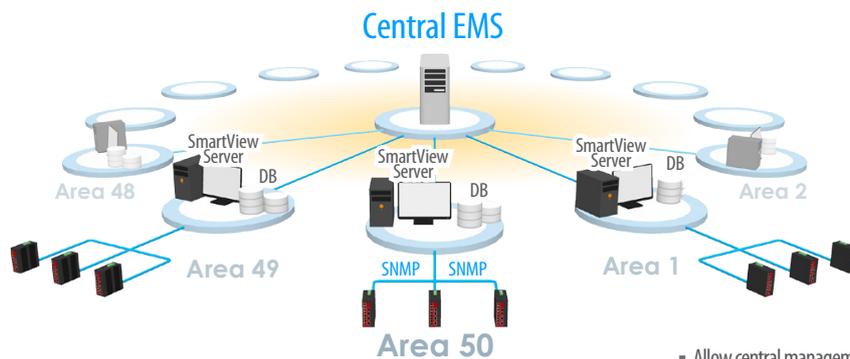

- Allow central management of up to 50 SmartView™ servers
- Allow up to 25,000 devices management
- Hierarchical Network Management Architecture
- Easy and rapid expansion of SmartView™ EMS


► **Figure 3 :** SmartView™

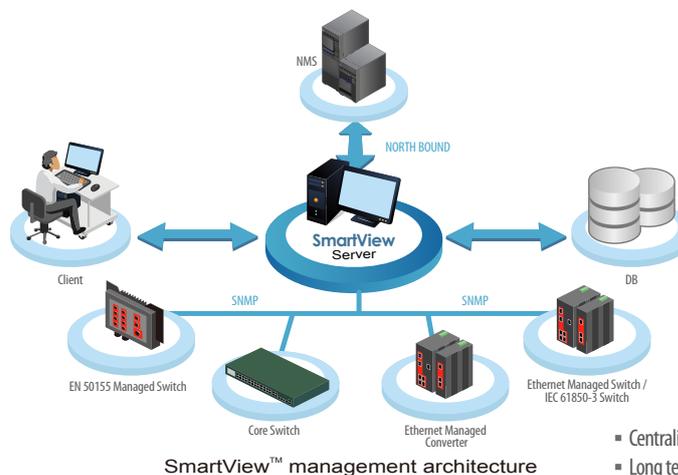

- Centralized Network Management Platform
- Long term events storage (up to 1 year)
- Alarm trap and event log management
- Real-time visual representations
- Remote access control
- Traffic/performance monitoring and management


# Industrial Managed GbE Switch with SyncE & IEEE 1588v2

► **Figure 4 :** SmartConfig™ is a convenient configuration tool for mass deployment of switch products

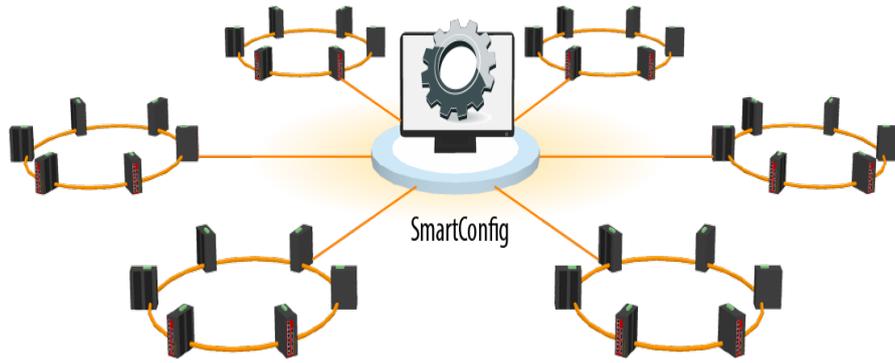

- Quick & Easy for mass configuration tool
- Multiple device auto discovery
- Group configuration, access
- Group firmware upgrade
- Export/Import Configuration

► **Figure 5 :** Multiple  $\mu$ -Ring

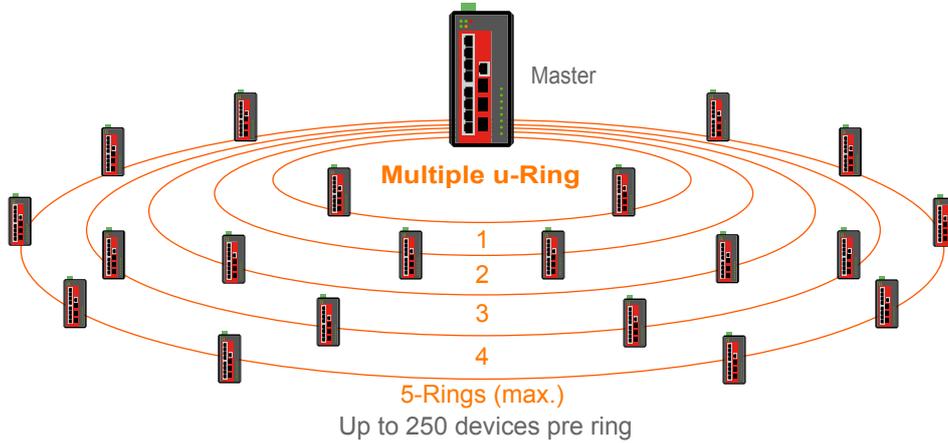

► **Figure 6 :** Friendly to set  $\mu$ -Ring configuration in Web


**u-Ring Configuration** Auto-refresh  Refresh

Delete	Instance	Type	Master	East		West	
				Port	Edge	Port	Edge
Delete	1	u-Ring ▼	<input type="checkbox"/>	1 ▼		2 ▼	
Delete	2	u-Ring ▼	<input type="checkbox"/>	4 ▼		3 ▼	
Delete	3	u-Ring ▼	<input type="checkbox"/>	10 (Fiber2) ▼		11 (Fiber3) ▼	
Delete	4	Sub-Ring ▼	<input type="checkbox"/>	6 ▼			
Delete	5	u-Chain ▼	<input type="checkbox"/>	5 ▼	<input type="checkbox"/>	9 (Fiber1) ▼	<input type="checkbox"/>

Add New Instance

Save Reset

► **Figure 7 :  $\mu$ -Ring Type**

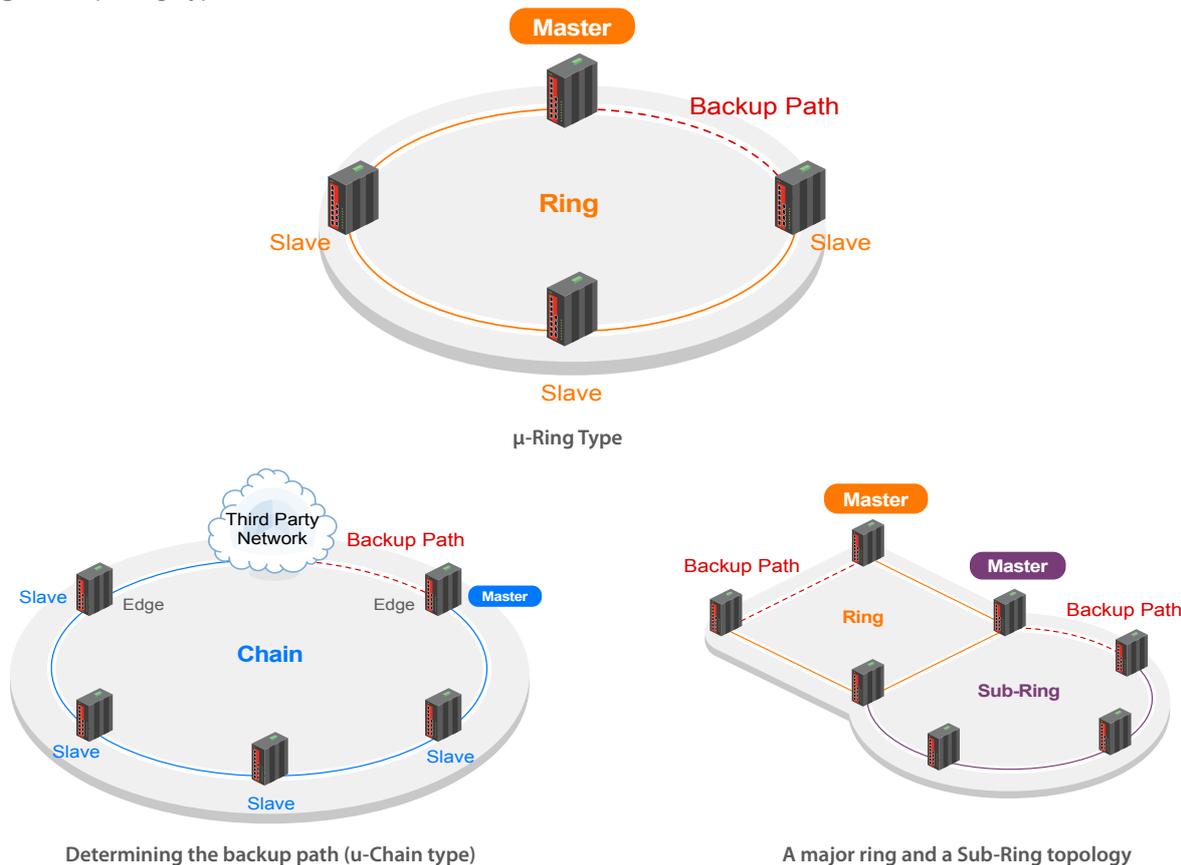


GbE Switch with SyncE & IEEE 1588v2

► **Figure 8 : Ring Configuration Example**

Ring Configuration Type


- u-Ring
- Sub-Ring

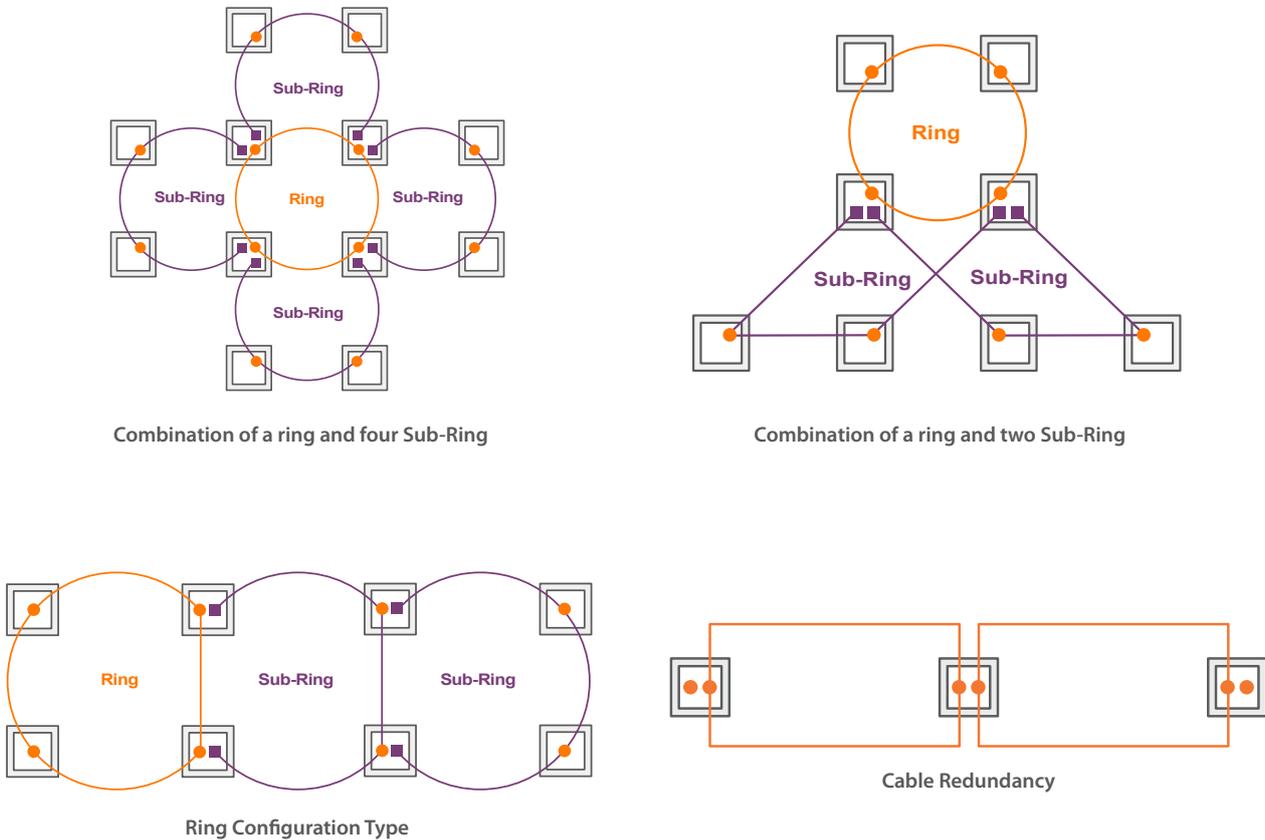

## Ordering Information

Model Name	Managed	Total Port	UTP Port	Fiber Port	Certification				Operating Temperature
			10/100/1000 Base-T	100/1000 Base-X	Railway EN50121-4	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC	
IGS-804SM-SE	V	12	8	4 SFP	V	V	V	V	-10~60°C
IGS-804SM-SE-E	V	12	8	4 SFP	V	V	V	V	-40~75°C
IGS-1608SM-SE	V	24	16	8 SFP	V	V	V	V	-10~60°C
IGS-1608SM-SE-E	V	24	16	8 SFP	V	V	V	V	-40~75°C

### Model Naming Rule

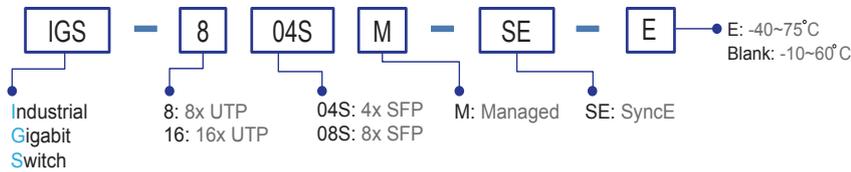

## Optional Accessories

### Industrial Power Supply


<b>DR-4524</b>	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
<b>MDR-40-24</b>	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C

### Industrial SFP Transceiver

(The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.)  
 (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

<b>ISFP-M7000-85-D(E)</b>	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
<b>ISFP-S7020-31-D(E)</b>	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
<b>ISFP-T7T00-00-(E)</b>	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
<b>ISFP-M5002-31-D(E)</b>	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
<b>ISFP-S5030-31-D(E)</b>	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)
<b>ISFP-T3T00-MA-(E)</b>	Industrial SFP 100Mbps, long reach UTP (2 wire) (500meter), Master, -10~70°C (-40~85°C)
<b>ISFP-T3T00-SL-(E)</b>	Industrial SFP 100Mbps, long reach UTP (2 wire) (500meter), Slave, -10~70°C (-40~85°C)

### SFP Naming Rule

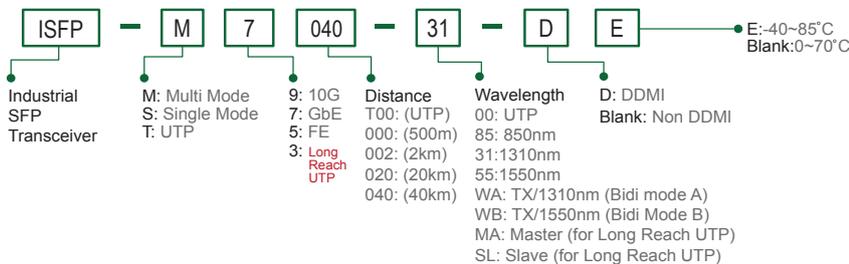

## Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports