



DO Module

Features

- PoE and Regular Ethernet Options
- Built-In Web Server
- Web HMI
- Modbus/TCP, Modbus/UDP Protocol
- Communication Security
- Dual Watchdog
- Operating Temperature: -25 ~ +75 °C
- I/O Pair Connection
- Built-In I/O
- DO: 16 Channels

Introduction

The ET-7000/PET-7000, a web-based Ethernet I/O module, features a built-in web server which allows configuration, I/O monitoring and I/O control by simply using a regular web browser. Remote control is as easy as surfing the Internet.

Besides, with the web HMI function, no more programming or HTML skills are required; creating dynamic and attractive web pages for I/O monitoring and I/O control would be fun to engineers ever after. The ET-7000/PET-7000 offers easy and safe access for users from anytime and anywhere! In addition, the ET-7000/PET-7000 also supports Modbus/TCP protocol that makes perfect integration to SCADA software.

Furthermore, PET-7000 features "PoE" that not only data but also power is carried through an Ethernet cable. This feature makes installation of PET-7000 a piece of cake. Imagine that no more unnecessary wires, only an Ethernet cable takes care of everything in the field.

Applications

Building Automation, Factory Automation, Machine Automation, Remote Maintenance, Remote diagnosis, Testing Equipment.


System Specifications

Models	ET-7042	PET-7042
Software		
Built-In Web Server	Yes	
Web HMI	Yes	
I/O Pair Connection	Yes	
Communication		
Ethernet Port	10/100 Base-TX with Auto MDI/MDI-X	
Protocol	Modbus/TCP, Modbus/UDP	
Security	ID, Password and IP Filter	
Dual Watchdog	Yes, Module (0.8 second), Communication (Programmable)	
LED Indicators		
L1 (System Running)	Yes	
L2 (Ethernet Link/Act)	Yes	
L3 (Ethernet 10/100 M Speed)	Yes	
PoE Power	-	Yes
2 Way Isolation		
Ethernet	1500 V _{dc}	-
I/O	3750 V _{rms}	3750 V _{rms}
EMS Protection		
ESD (IEC 61000-4-2)	4 kV Contact for each terminal	
EFT (IEC 61000-4-4)	+/-2 kV for Power	
Power Requirements		
Reverse Polarity Protection	Yes	
Powered from terminal block	Yes, 10 ~ 30 V _{dc}	Yes, 12 ~ 48 V _{dc}
Powered from PoE	-	Yes, IEEE 802.3af, Class1
Consumption	2.7 W	4.3 W
Mechanical		
Dimensions (W x L x D)	72 mm x 123 mm x 35 mm	
Installation	DIN-Rail or Wall mounting	
Environment		
Operating Temperature	-25 °C ~ +75 °C	
Storage Temperature	-30 °C ~ +80 °C	
Humidity	10 ~ 90% RH, non-condensing	

I/O Specifications

Models	ET-7042	PET-7042
Digital Output		
Output Channels	16	
Type	Isolated Open Collector (Sink)	
Max. Load Current	100 mA/channel at 25 °C Direct drive power relay module	
Load Voltage	+5 Vdc ~ +30 Vdc	
Overvoltage Protection	-	60 Vdc
Overload Protection	-	1.3 A
Short-circuit Protection	-	Yes
Power On Value	Yes, Programmable	
Safe Value	Yes, Programmable	

Pin Assignment

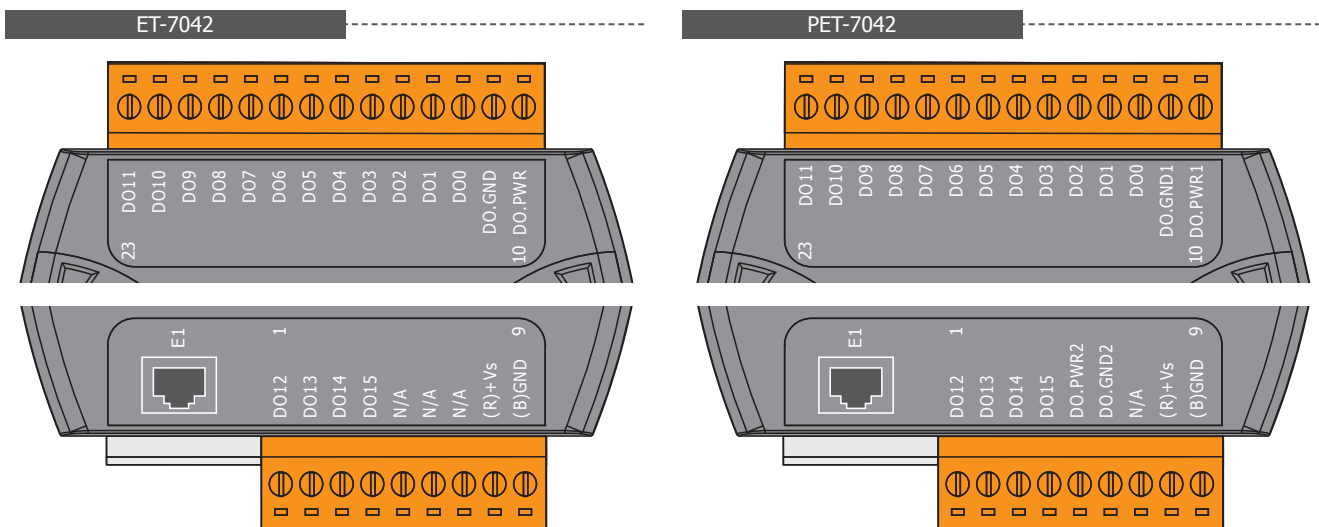

Wire Connection

Output Type	ON State Readback as 1	OFF State Readback as 0
Drive Relay		
Resistance Load		

Ordering Information

ET-7042 CR	16-channel Isolated Sink Type Open Collector Digital Output Module (RoHS)
PET-7042 CR	16-channel Isolated Sink Type Open Collector Digital Output PoE Module (RoHS)

Accessories

NS-205 CR	Unmanaged 5-port Industrial Ethernet Switch; requires 24 Vdc Input (RoHS)	MDR-20-24 CR	24V/1A, 24 W Power Supply with DIN-Rail Mounting (RoHS)
NS-205PSE CR	Unmanaged Ethernet switch with 4-PoE and 1 RJ45 uplink; requires 48 Vdc Input (RoHS)	DIN-KA52F-48 CR	48V/0.52A, 25 W Power Supply with DIN-Rail Mounting (RoHS)
NS-205PSE-24V CR	Unmanaged Ethernet switch with 4-PoE and 1 RJ45 uplink; requires 24 Vdc Input (RoHS)		