

ITC210WM

21.5" FHD TFT-LCD Slim Bezel Modular Panel PC Powered by Intel® Smart Display Module (SDM) CPU Card

Features

- 21.5" full HD TFT-LCD
- Aspect ratio: 16:9; brightness: 250 nits
- Slim bezel shape under 48.5 mm thickness
- Projected capacity touch supported, 10-point touch
- Swappable CPU card design
- Supports Intel® SDM CPU card
- Metal frame structure for various application
- Supports add-on modules and mounting kits (optional)



Specifications



Front Bezel	IP54, metallic front bezel	
LCD Panel	Display Type	21.5" FHD TFT-LCD
	Brightness (cd/m ²)	250 nits
	Resolution	1920 (H) x 1080 (V)
	Aspect Ratio	16:9
Main System	Intel® SDM Small (SDM-S, 60 x 100 mm)	
	Intel® SDM Large (SDM-L, 175 x 100 mm)	
I/O Connector	Left Side	1 x Power button with LED 1 x HDMI output 1 x USB 3.0 Type A 2 x USB 2.0 Type A 1 x microSD card slot (push-push type) 2 x 12 VDC-in barrel (screw-lock type)
Touchscreen	Projected capacitive multi-touch	
Stereo Speaker	2 x S.P.L. 96dB, 1.5W, 4 ohm	
Power Supply	65W (12V@5.41A) AC to DC openframe power supply inside	
Power Consumption	Average 50W	
Dimensions	531mm (20.9") (W) x 48.5 mm (1.9") (D) x 317mm (12.5") (H)	
Weight (net/gross)	2.2 kg (4.0 lb)/6.7kg (14 lb)	
Operating Temperature	0°C to +40°C (+32°F to +104°F)	
Operating Humidity	20% - 80%, non-condensing	
Certifications	CE, FCC Class A, and CB	

CPU Card Selection: SDM300-S

CPU	Quad cores Intel® Pentium® N4200 1.1GHz processor or Dual cores Intel® Celeron® N3350 1.1GHz processor (depends on CPU Card)	
System Memory	Onboard LPDDR4 2400 MHz 4GB (8GB optional)	
BIOS	AMI UEFI BIOS	
Storage	1 x eMMC 64GB onboard	
Watchdog Timer	255 levels, 0 to 255 sec.	
Onboard Graphics	Intel® HD Graphics 505/500 (depends on CPU card)	
I/O Connector	Rear Side	1 x GbE LAN (depends on SDM I/O) 2 x USB 3.0 Type A 2 x SMA antenna reserved hole
Expansion Interface	1 x M.2 Key E 2230 slot (for the Wi-Fi/4G LTE)	

CPU Card Selection: SDM500-L

CPU	Quad cores Intel® i5-8365UE 1.6GHz processor or Dual cores Intel® Celeron® 4305UE 2.0GHz processor (depends on CPU card)	
System Memory	2 x 260-pin DDR4-2400 SO-DIMM slot, up to 64GB	
BIOS	AMI UEFI BIOS	
Storage	1 x M.2 Key M 2280 slot	
Watchdog Timer	255 levels, 0 - 255 sec.	
Onboard Graphics	Intel® UHD Graphics 620/610 (depends on CPU card)	
I/O Connector	Rear Side	1 x Power button with LED (depends on SDM I/O) 1 x HDMI output 1 x GbE LAN 2 x USB 3.0 Type A 1 x USB 3.0 Type C 1 x Audio output 1 x Micphone input
Expansion Interface	1 x M.2 Key E 2230 slot (for the Wi-Fi/4G LTE)	

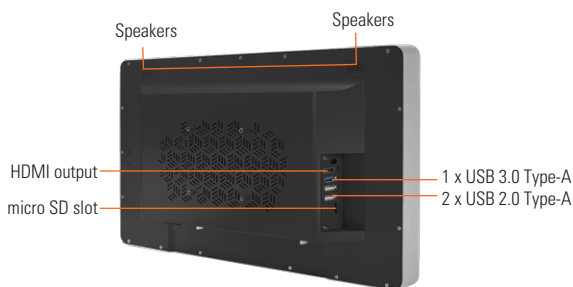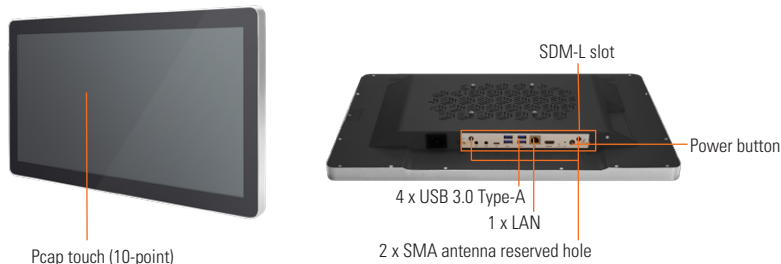

Ordering Information

Standard

ITC210WM	21.5" FHD TFT-LCD slim bezel modular panel PC without Intel® SDM CPU card
ITC210WM-300S	21.5" FHD TFT-LCD slim bezel modular panel PC with Intel® SDM-S and Intel® Pentium® N4200 or Celeron® N3350 processor (depends on CPU card)
ITC210WM-500L	21.5" FHD TFT-LCD slim bezel modular panel PC with Intel® SDM-L and Intel® i5-8365UE or Celeron® 4305UE processor (depends on CPU card)

Optional

Add-on Module	5MP webcam
Mounting Kit	Wall mount kit
M.2 SSD	FLEXONs ACHIEVER M.2 2280-B-M 64GB (P/N: E9C2P00642)
DDR4 SO-DIMM	Innodisk 4GB DDR4-2400 260pin SO-DIMM (P/N: E9C1913G01) Innodisk 8GB DDR4-2400 260pin SO-DIMM (P/N: E9C1914G03)
Power Cord	AC power cord UE, L=1830 mm (P/N: 5990300000E) AC power cord US, L=1830 mm (P/N: 5990200000E)

Optional OS Installation

Windows® 10 full 64-bit
Windows® 10 IoT 64-bit

Dimensions

