


LIMITRON®

Fast-Acting Fuses

13/32" x 1-1/2", Class CC - 600 Volt, 1/10 - 30 Amps




Dimensional Data

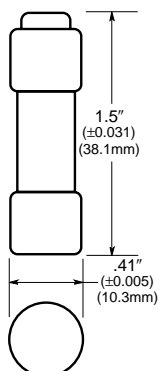

- LIMITRON® fast-acting fuse.
- Melamine tube. Nickel-plated brass endcaps.
- U.L. Listed for branch circuit protection.
- Rejection type; for both standard holders or those which reject other type fuses.

Time-Current Characteristic Curves—Average Melt

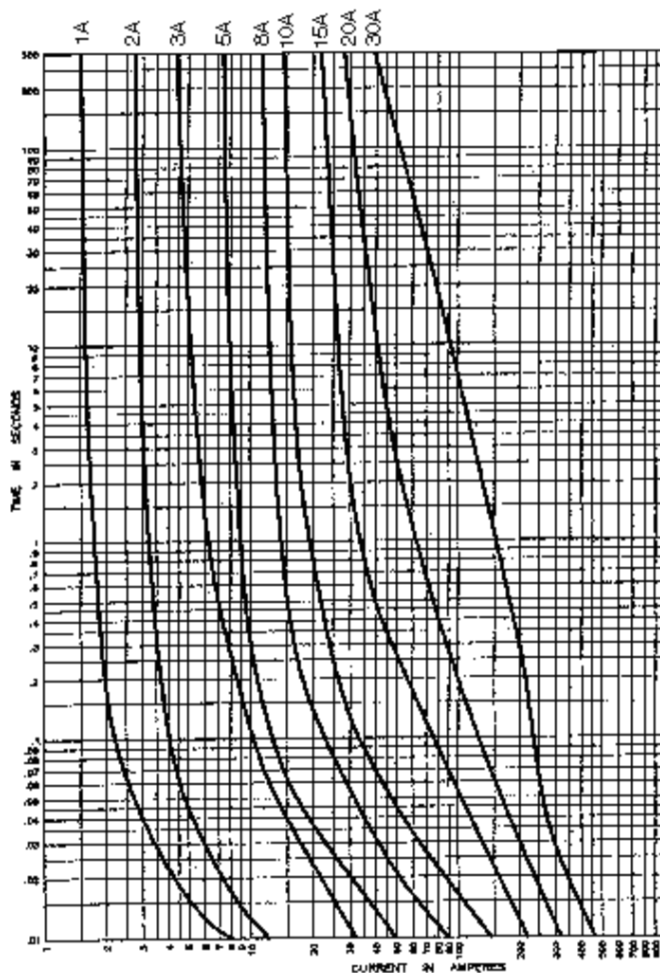

Catalog Symbol: KTK-R
Fast-Acting Branch Circuit Fuse:

1/10 TO 30A

Voltage Rating:

600Vac (or less): 0-30A

Interrupting Rating:

ac: 200,000A RMS Sym.

UL Listed, STD. 248-4, Class CC,

(Guide #JDDZ, File #E4273)

CSA Certified, C22.2 NO. 248.4, (File #53787—Class #1422-02)

Electrical Ratings (Catalog Symbol and Amperes)

600Vac - UL Listed & C.S.A.

KTK-R-1/10	KTK-R-6/10	KTK-R-3-1/2	KTK-R-10
KTK-R-1/8	KTK-R-3/4	KTK-R-4	KTK-R-12
KTK-R-2/10	KTK-R-1	KTK-R-5	KTK-R-15
KTK-R-1/4	KTK-R-1-1/2	KTK-R-6	KTK-R-20
KTK-R-3/10	KTK-R-2	KTK-R-7	KTK-R-25
KTK-R-4/10	KTK-R-2-1/2	KTK-R-8	KTK-R-30
KTK-R-1/2	KTK-R-3	KTK-R-9	—

Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight*	
		Lbs.	Kg.
1/10-30	10	.180	.082

*Weight per carton.

Recommended fuseblocks/fuseholders for Class CC 600V fuses
 See Data Sheets listed below

- Open fuseblocks - 1105
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113
- In-line fuseholders - 2126

CE